


Aluminium-U-Profil

Güte: EN AW 6060 T66, AlMgSi 0,5 F22
Normen: EN 573-3 / EN 755-1 / -2 / -9
Eloxalqualität
Länge: 6 Meter

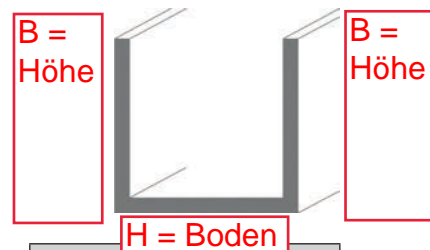

Abmessung H x B x S mm	Gewicht kg/mtr.
10 x 10 x 2	0,140
10 x 20 x 2	0,248
12 x 12 x 2	0,173
14 x 16 x 2	0,227
15 x 15 x 2	0,221
15 x 20 x 2	0,275
20 x 10 x 2	0,194
20 x 15 x 2	0,248
20 x 20 x 2	0,302
20 x 20 x 3	0,437
20 x 25 x 2	0,356
20 x 30 x 2	0,410
20 x 40 x 2	0,518
20 x 40 x 2,5	0,641
25 x 15 x 2	0,275
25 x 20 x 2	0,329
25 x 25 x 2	0,383
25 x 25 x 3	0,559
30 x 15 x 2	0,302
30 x 15 x 3	0,437
30 x 20 x 2	0,356
30 x 20 x 3	0,518
30 x 30 x 2	0,464
30 x 30 x 3	0,680
30 x 40 x 3	0,842
30 x 50 x 3	1,004
30 x 60 x 2	0,788


Abmessung H x B x S mm	Gewicht kg/mtr.
35 x 20 x 2	0,383
35 x 25 x 2	0,437
35 x 35 x 2	0,545
35 x 35 x 3	0,802
40 x 15 x 2	0,356
40 x 20 x 2	0,410
40 x 20 x 2,5	0,506
40 x 20 x 3	0,599
40 x 25 x 2	0,464
40 x 25 x 3	0,680
40 x 25 x 4	0,886
40 x 30 x 2	0,518
40 x 30 x 3	0,761
40 x 40 x 2	0,626
40 x 40 x 3	0,923
40 x 40 x 4	1,210
40 x 40 x 5	1,485
40 x 50 x 2	0,734
40 x 60 x 4	1,642
45 x 25 x 3	0,721
50 x 15 x 2	0,410
50 x 20 x 2	0,464
50 x 20 x 3	0,680
50 x 25 x 2	0,518
50 x 30 x 2	0,572
50 x 30 x 3	0,842
50 x 30 x 4	1,102

Abmessung H x B x S mm	Gewicht kg/mtr.
50 x 40 x 3	1,004
50 x 40 x 4	1,318
50 x 50 x 2	0,788
50 x 50 x 3	1,166
50 x 50 x 4	1,534
50 x 50 x 5	1,890
60 x 20 x 2	0,518
60 x 30 x 3	0,923
60 x 40 x 3	1,085
60 x 40 x 4	1,426
60 x 40 x 5	1,755
60 x 50 x 2	0,842
60 x 50 x 3	1,247
60 x 60 x 3	1,409
60 x 60 x 4	1,858
60 x 60 x 5	2,295
65 x 25 x 2,5	0,743
65 x 55 x 2,5	1,148
70 x 35 x 3	1,850
70 x 40 x 3	1,166
70 x 40 x 4	1,534
80 x 20 x 2	0,626
80 x 30 x 3	1,085
80 x 40 x 3	1,247
80 x 40 x 4	1,642
80 x 40 x 5	2,025
80 x 40 x 6	2,398

Abmessung H x B x S mm	Gewicht kg/mtr.
80 x 50 x 3	1,409
80 x 50 x 5	2,295
80 x 60 x 5	2,565
80 x 80 x 4	2,506
90 x 20 x 2,5	0,844
90 x 40 x 3	1,328
90 x 50 x 3	1,490
90 x 50 x 5	2,430
100 x 20 x 2	0,734
100 x 40 x 3	1,409
100 x 50 x 3	1,571
100 x 50 x 5	2,565
100 x 50 x 10	4,860
110 x 40 x 3	1,490
120 x 20 x 2,5	1,046
120 x 40 x 3	1,571
140 x 40 x 3	1,733
140 x 40 x 6	3,370
140 x 60 x 6	4,018
150 x 30 x 4	2,182
150 x 37 x 3	1,766
160 x 80 x 8	6,566
200 x 40 x 3	2,219
220 x 20 x 4	2,722
260 x 38 x 3	2,673

Aluminium-Rundstange

Güte: EN AW 6060 T66, AlMgSi 0,5 F22
Normen: EN 573-3 / EN 755-1 / -2 / -3
Eloxalqualität
Länge: 6 Meter




Abmessung mm	Gewicht kg/mtr.
6	0,080
8	0,140
10	0,212
12	0,350
15	0,480
18	0,680
20	0,850
25	1,320
30	1,910
35	2,610
40	3,390
45	4,300
50	5,300
60	7,630
70	10,390
80	13,800
100	21,220

**Noch fragen ?
Rufen Sie uns einfach
an.
Wir helfen gerne.
Tel. 08135 - 937732-0**

Aluminium-Vierkantstange

Güte: EN AW 6060 T66 , AlMgSi 0,5, F 22
Normen: 373-3 / EN 755-1 / -2 / -4
Eloxalqualität
Länge: 6 Meter



Abmessung mm	Gewicht kg/mtr.
6	0,097
8	0,175
10	0,270
12	0,390
15	0,610
20	1,080
25	1,690
30	2,430
35	3,300
40	4,320
50	6,750
60	9,720
80	17,280
100	27,000

Weitere Abmessungen und Werkstoffe kurzfristig lieferbar!