

# *Sonus faber*

ADVANCED TECHNICAL DATASHEET – ARENA 5



# TABLE OF CONTENTS

01 Introduction

---

04 Technologies

---

02 Specifications

---

05 Mounting System

---

03 Measurements

---



# 01. INTRODUCTION

Arena is Sonus faber's custom installation speaker collection designed for reference-level private cinema environments.

Combining the brand's signature Natural Sound with powerful dynamics and seamless architectural integration, Arena delivers an immersive listening experience while elegantly blending into the design of the space.

Handcrafted in Italy by the Artisans of Sound, the collection brings together acoustic innovation, refined design and installation flexibility, enabling integrators to create high-performance private cinema systems tailored to each project and environment.

The name Arena evokes a space created for powerful shared experiences. Inspired by the architecture of ancient amphitheaters — where sound and spectacle surrounded the audience — the collection translates this concept into the modern private cinema environment.



# 02. SPECIFICATIONS

## System

Speaker type	3,0 Way
Enclosure type	Sealed Box
Mounting Depth	100,0 mm
Weight	24,0 kg
Depth	100,0 mm
Width	300,0 mm
Height	1058,0 mm

## Loudspeakers

Low frequency transducer	2x	6,5"
Cone	Paper	
Magnet	Neodymium	
Demodulation	None	
Mid frequency transducer	2x	5,25"
Cone	Paper	
Magnet	Ferrite	
Demodulation	None	
High frequency transducer	1x	1,1" (28mm)
Dome	Silk	
Magnet	Neodymium	
Demodulation	Copper Cap	

Frequency response (-3dB on-axis)*	65,4 Hz	40000,0 Hz
Frequency Response (-6dB on-axis)*	56,6 Hz	40000,0 Hz
Sensitivity @2.83Vrms @1m**	90,6 dB	
Electrical crossover frequencies***	375Hz / 2700Hz	
Acoustical crossover frequencies	375Hz / 2450Hz	
Nominal Impedance	4,0 Ω	
Minimal impedance	3,6 Ω	

## Electronics

Speaker Connectivity	Mono wiring
Recommended maximum amplifier output power	300,0 W

## Cabinet

Shape	Squared
Materials	Wood - Aluminum

\* Note : The f-3dB and f-6dB are computed based on the average sensitivity of the merged speaker on the [100-1000]Hz bandwidth



\*\* Note : The average sensitivity of the speaker is computed on the merged response of the speaker measured on the wall @2,83V and @1m. It is defined as the arithmetic average on 1/3rd octave bands according to the IEC 61260-1, centered on the ISO 266 frequencies, from f-3dB to 20kHz

\*\*\* Note : Measured on realistic resistive loads


# 03. MEASUREMENTS

## OUT OF AXIS METHOD :


The out of axis measurements are limited to  $\pm 15^\circ$  vertically and  $\pm 45^\circ$  horizontally. A graphic representation is shown below to convert these values in understandable distances compared to the listener's head at different positions.

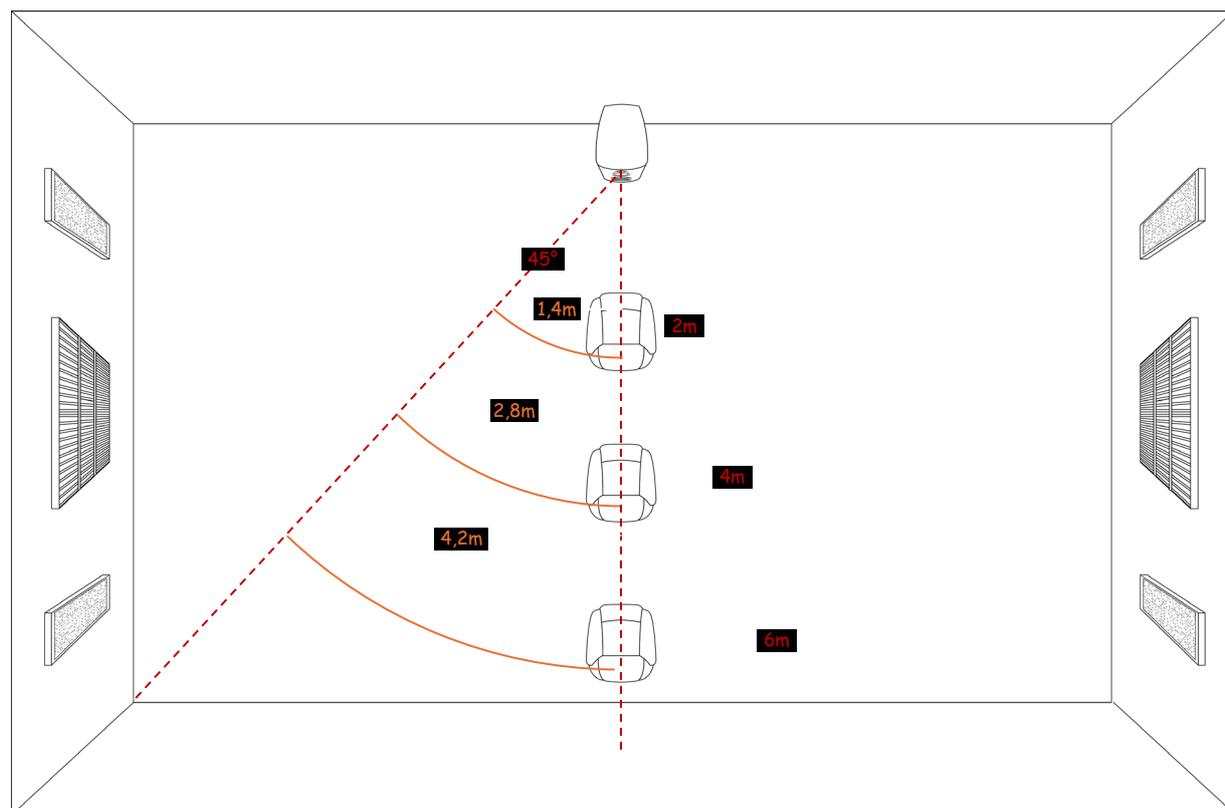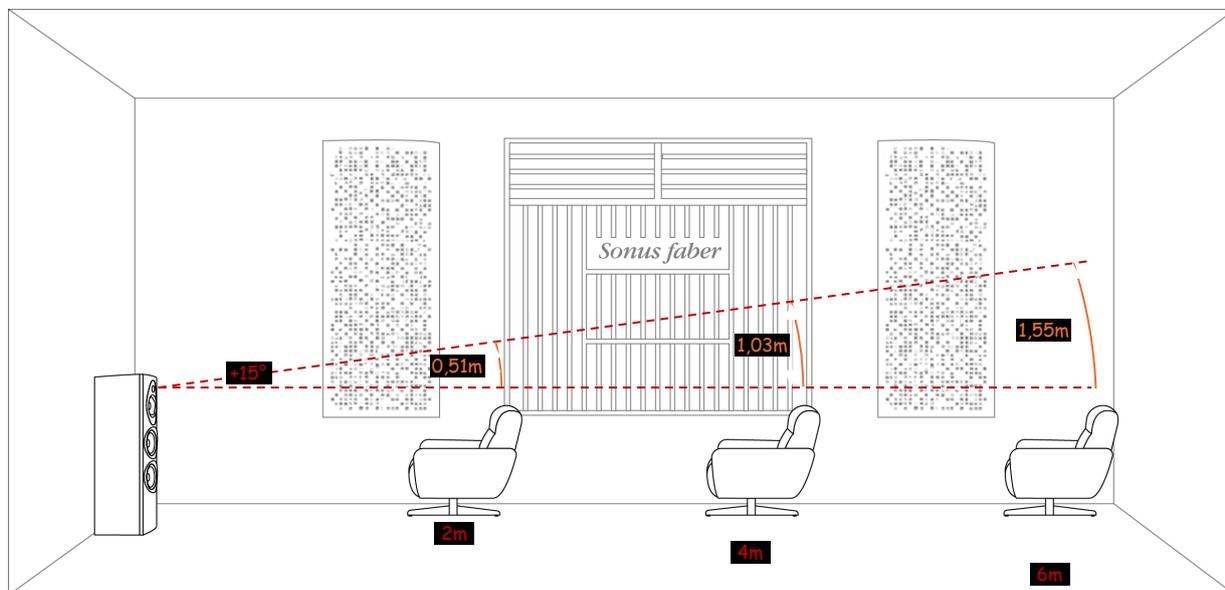

# HORIZONTAL POLAR MAP NORMALIZED TO 00°

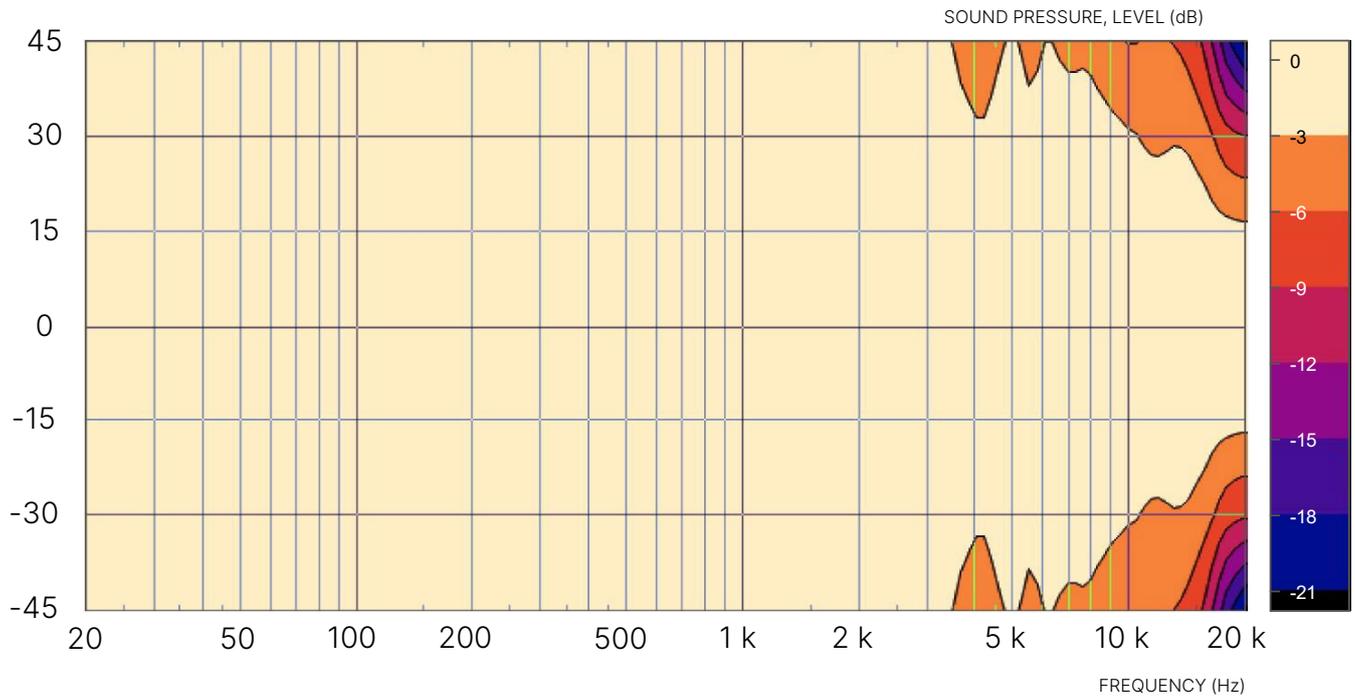


# VERTICAL POLAR MAP NORMALIZED TO 00°

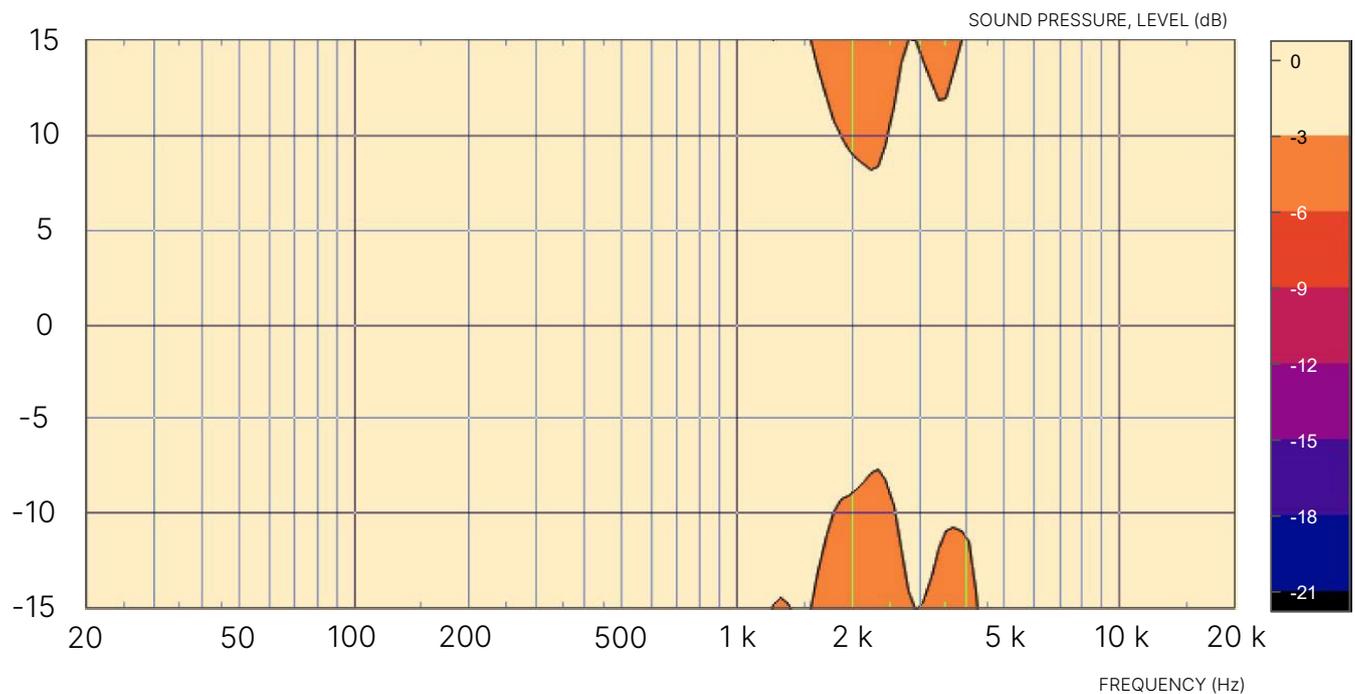


# HORIZONTAL - FREQUENCY RESPONSE

(dB) Level, Sound pressure

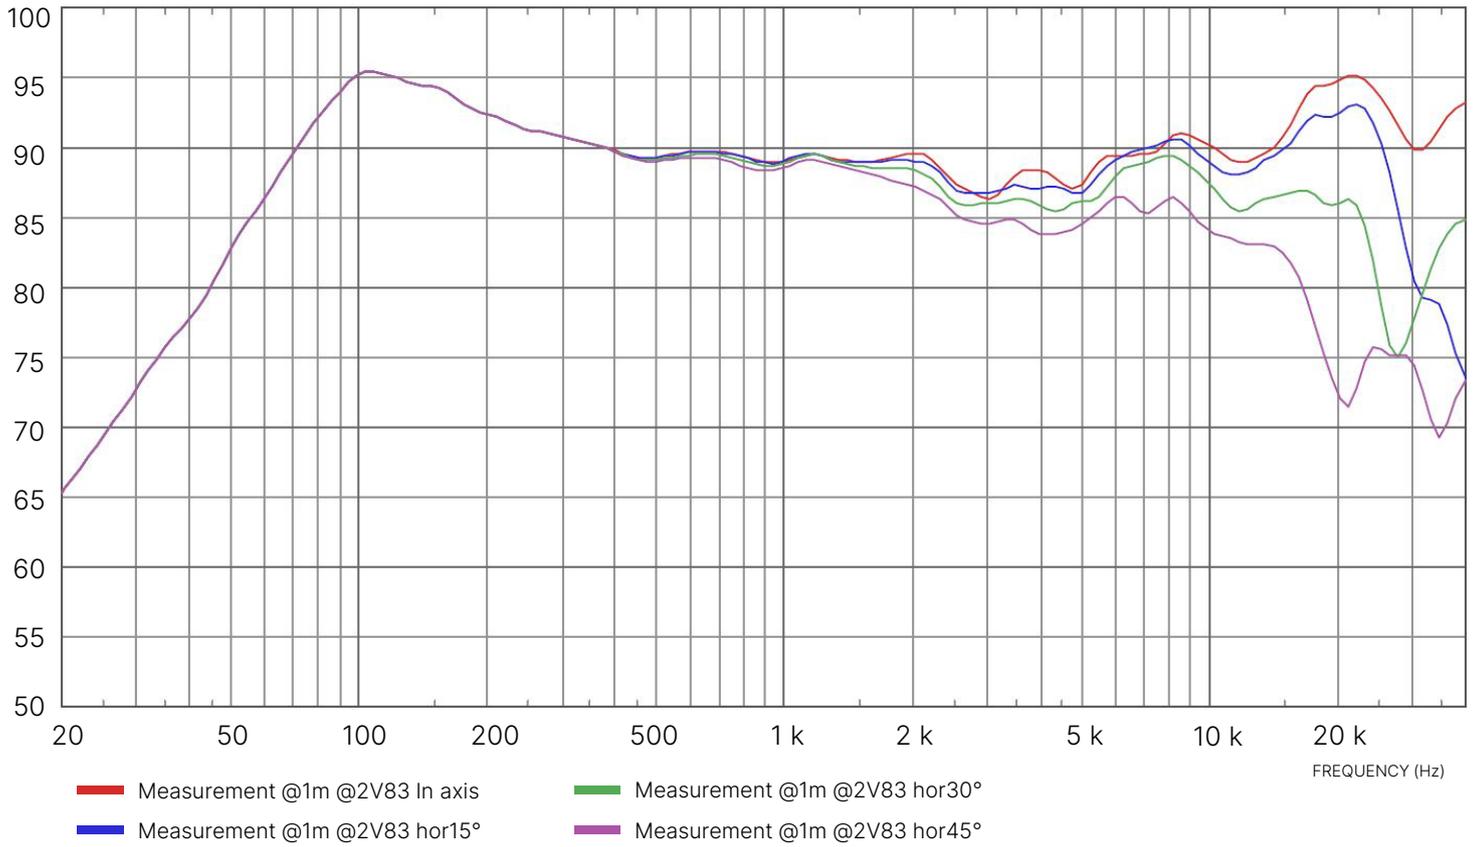


# VERTICAL - FREQUENCY RESPONSE

(dB) Level, Sound pressure

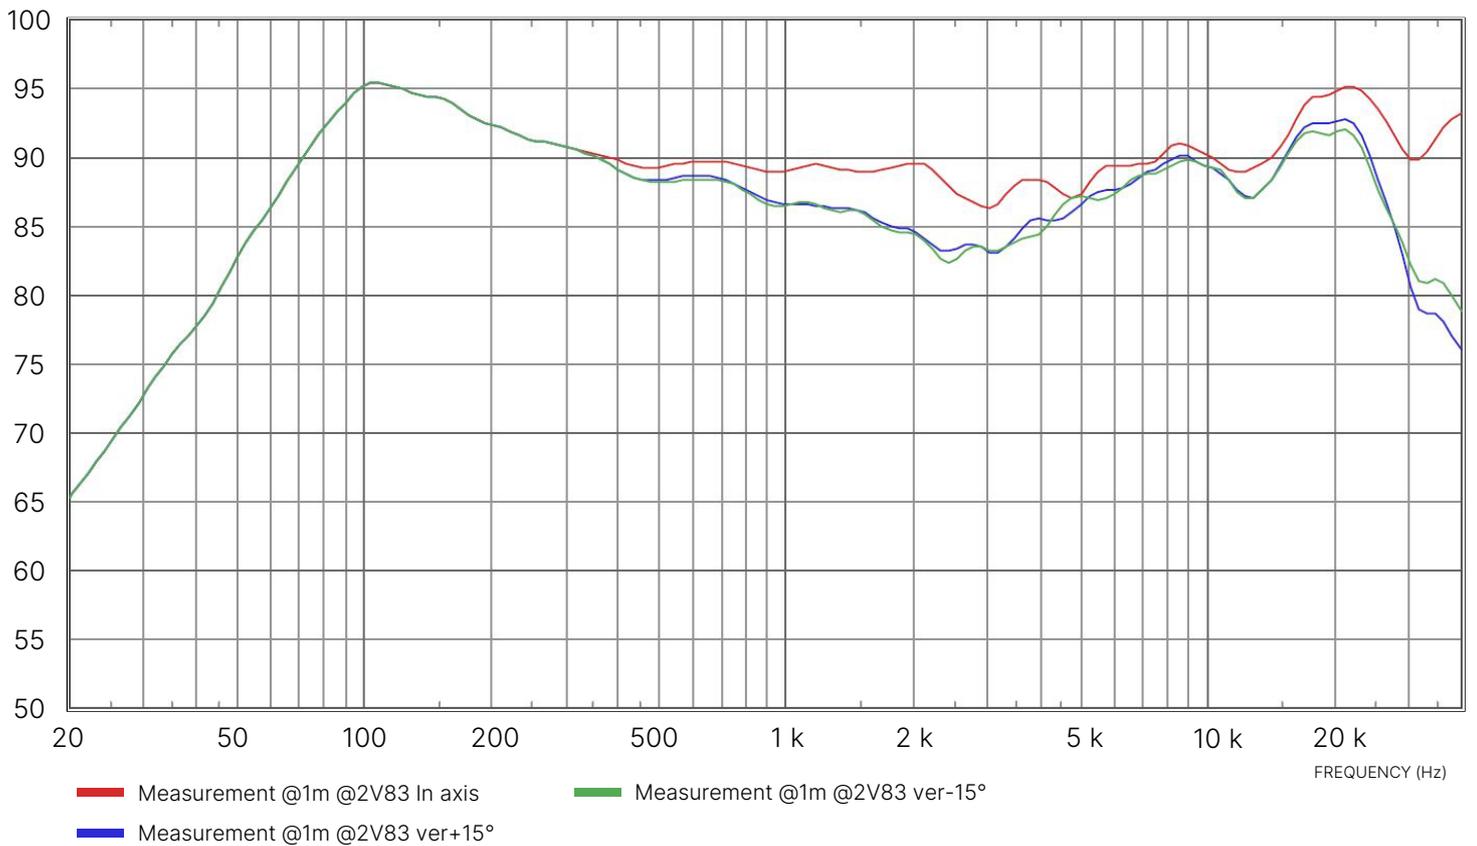


# HORIZONTAL OUT OF AXIS FREQUENCY RESPONSE NORMALIZED TO 00°

(dB) Level, Sound pressure

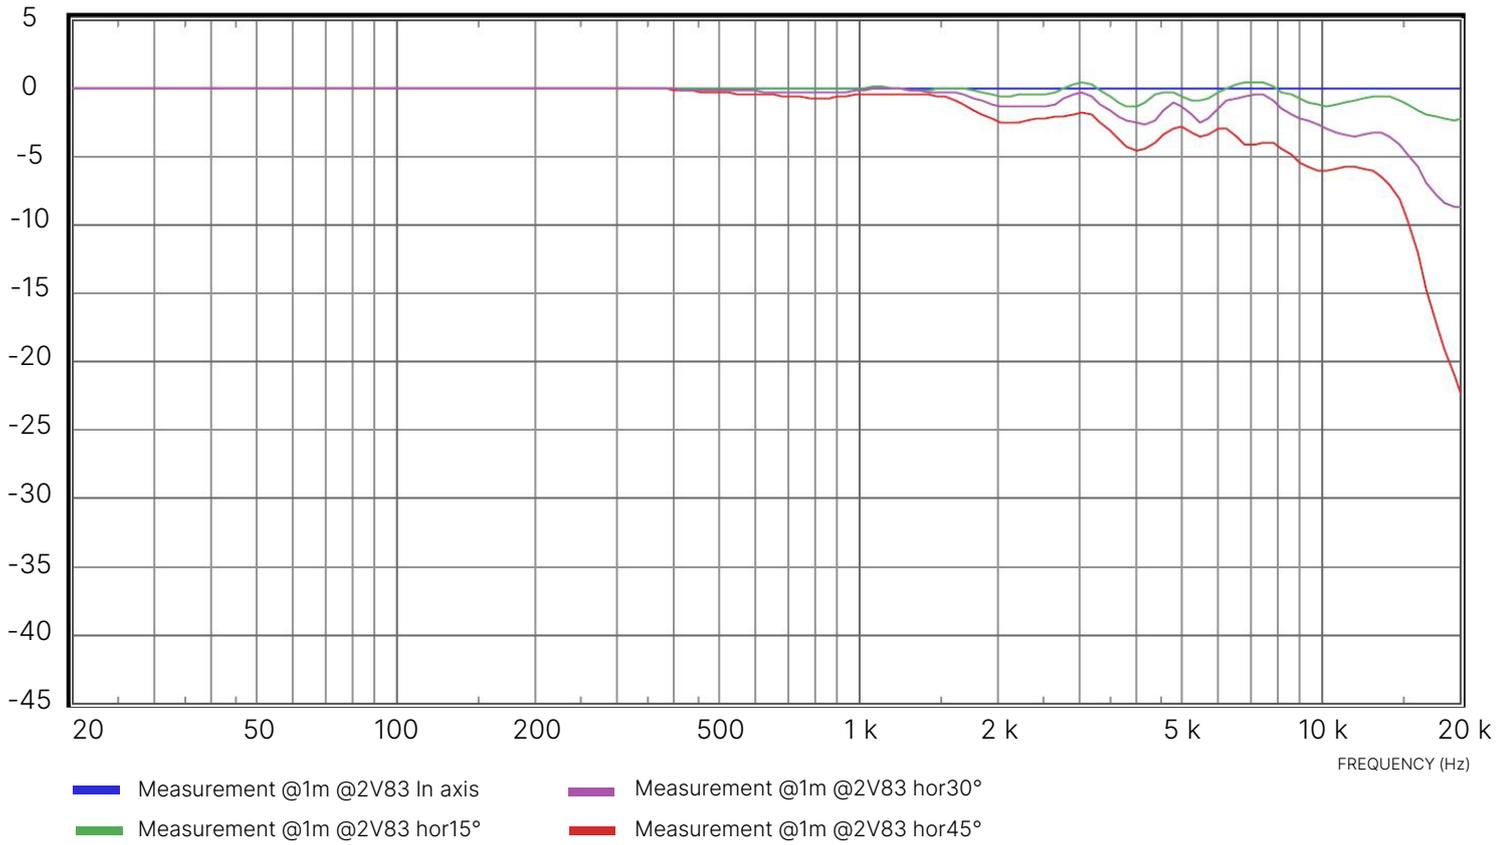


# VERTICAL OUT OF AXIS FREQUENCY RESPONSE NORMALIZED TO 00°

(dB) Level, Sound pressure

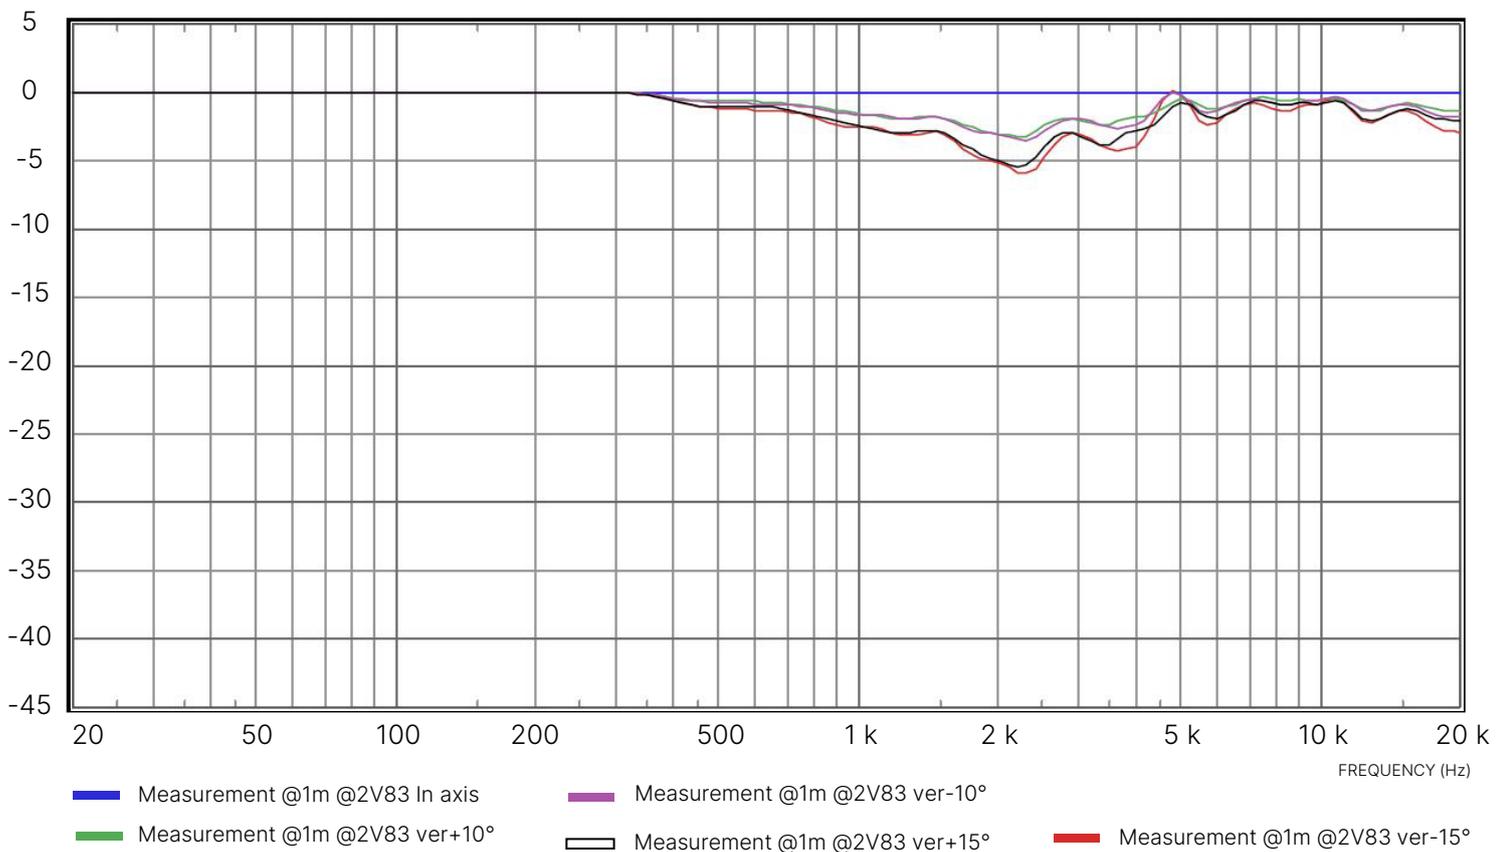


# HORIZONTAL POLAR PLOT FOR DIFFERENT FREQUENCIES

Level (dB)


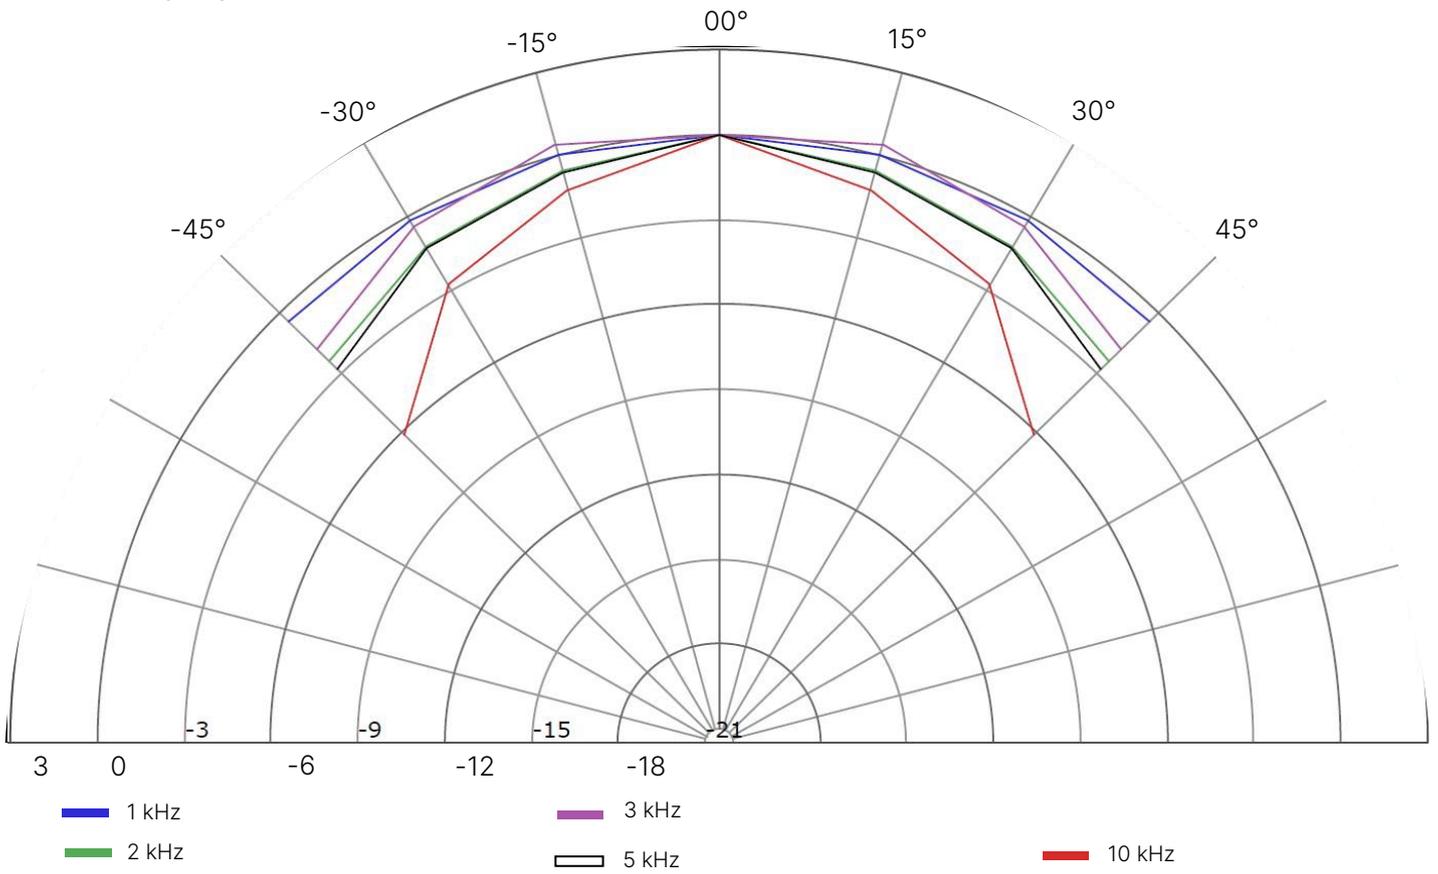


# VERTICAL POLAR PLOT FOR DIFFERENT FREQUENCIES

Level (dB)

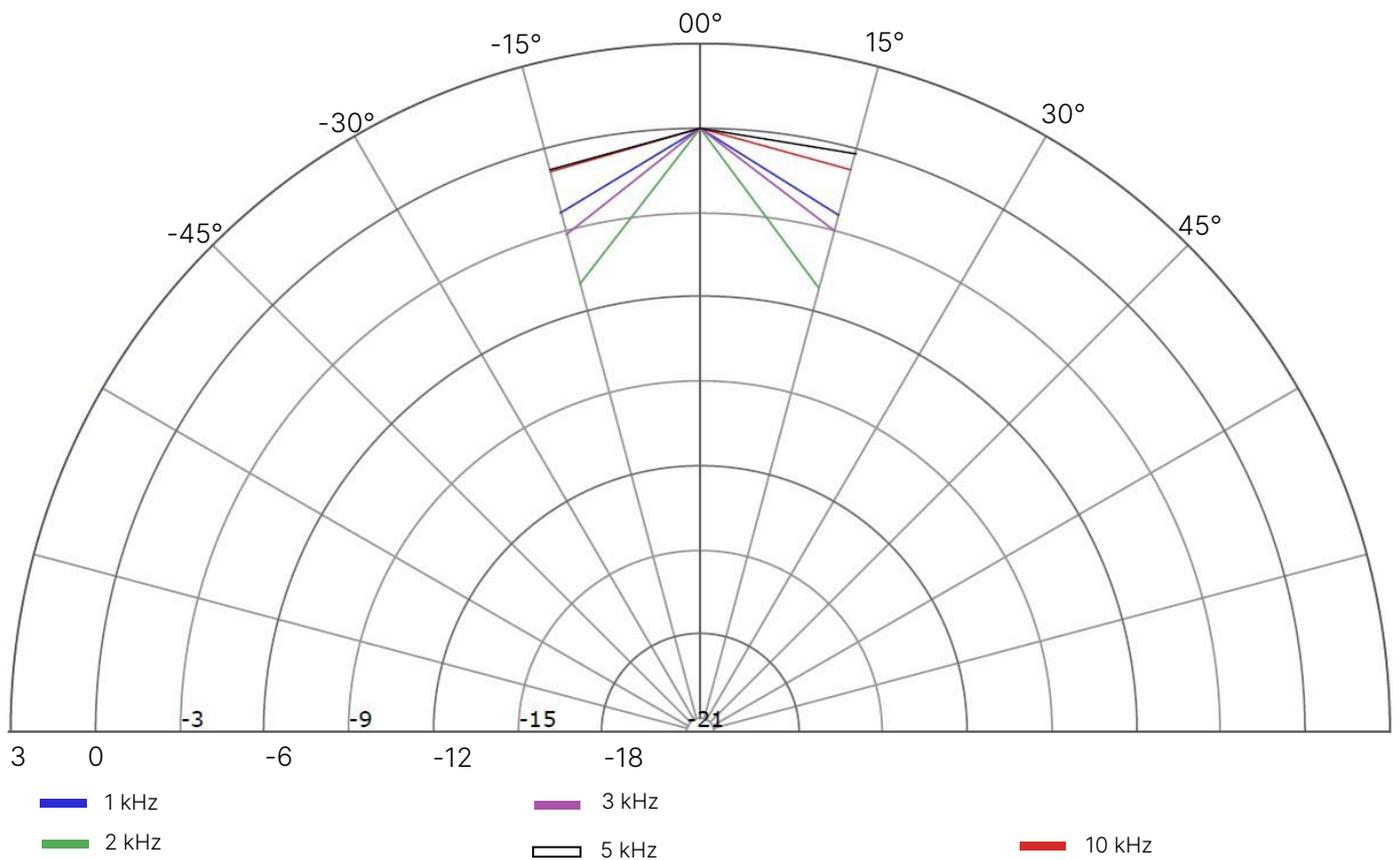

# ELECTRIC MEASUREMENTS

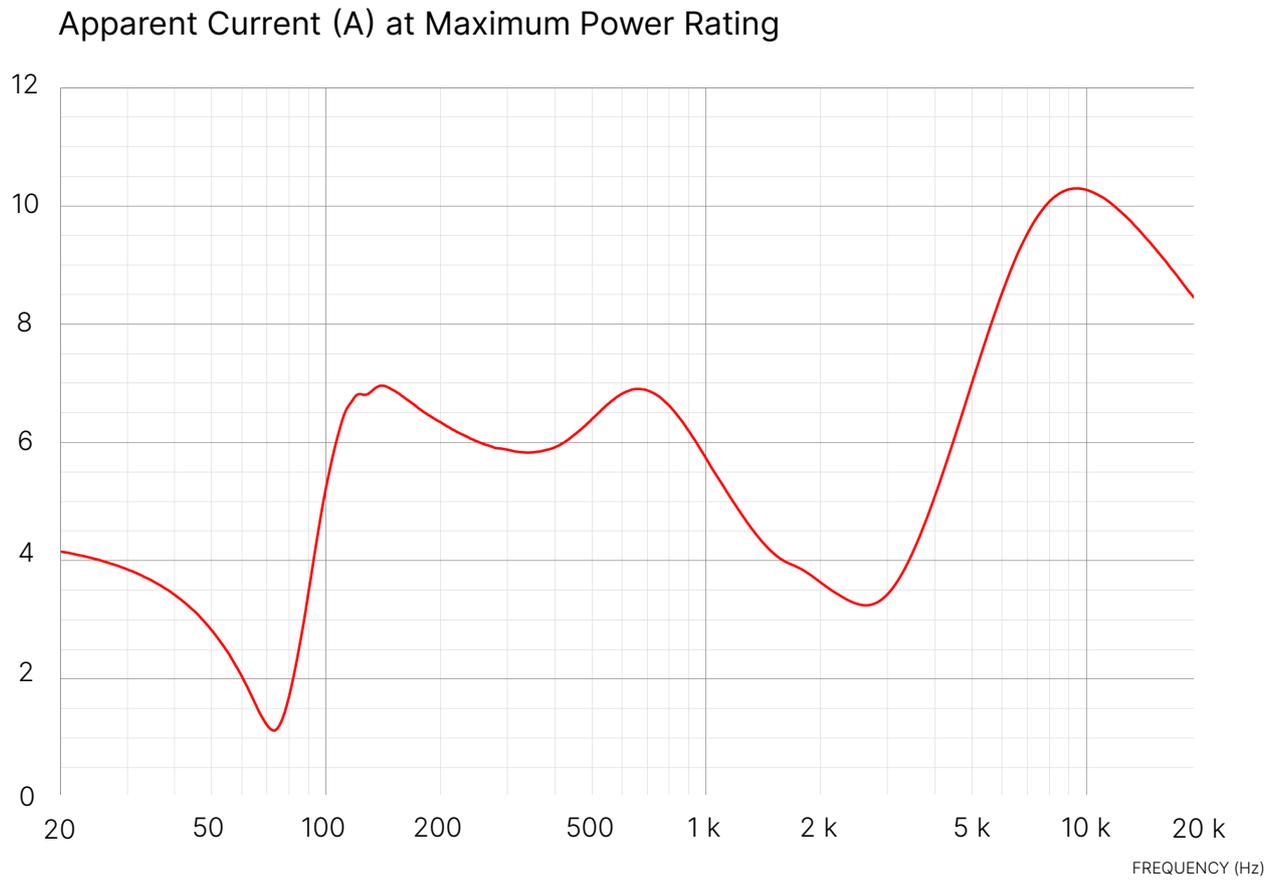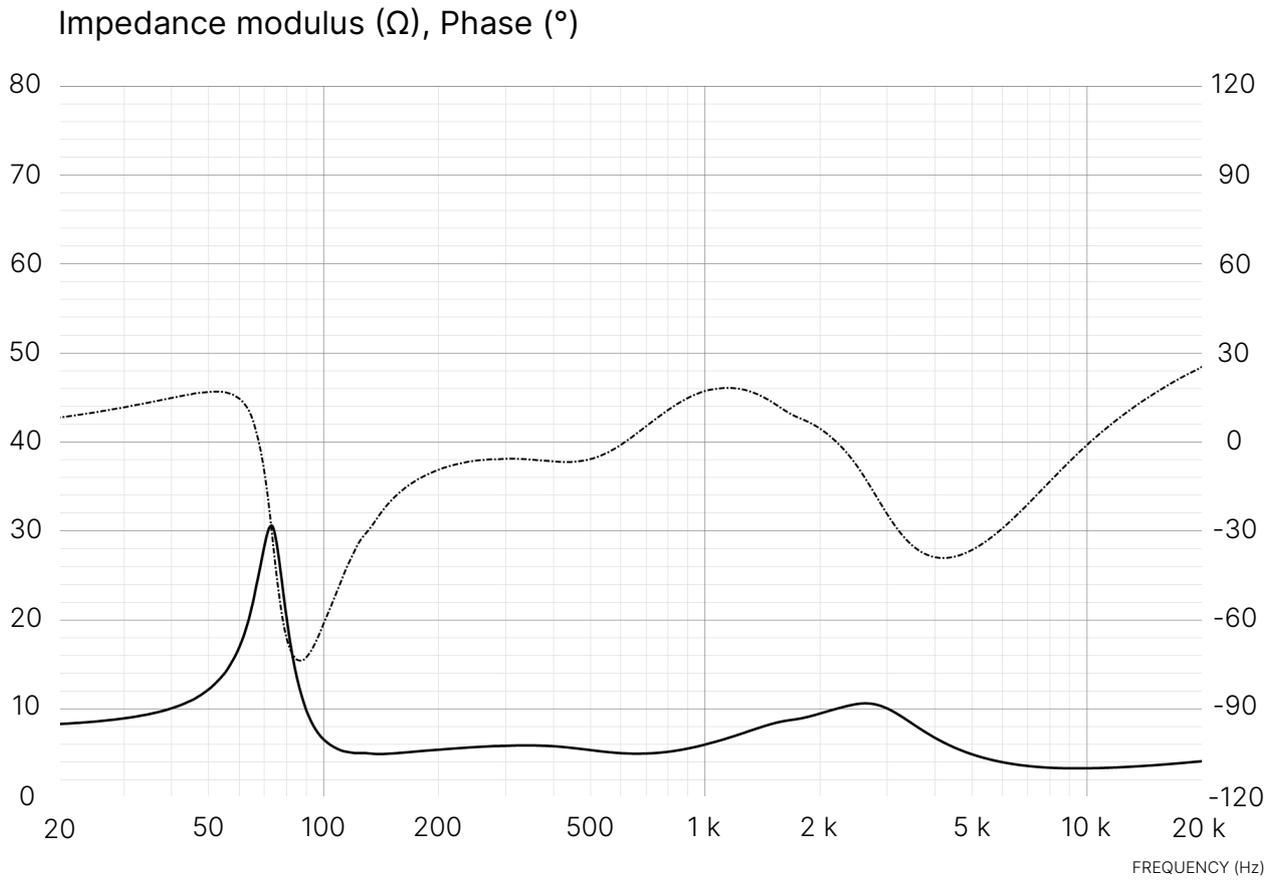



# 04. TECHNOLOGIES

## Phase Plug


The phase-plug is designed to improve the out-of-axis response of the midrange, linearizing its frequency response on the highest frequencies of its useful bandwidth



# 04. TECHNOLOGIES

## Organic Basket


The organic basket fully designed in Italy, follows a non symmetric pattern that gives more structural stiffness to the basket and at the same time lets the cone free to move as it should be. If the basket was too closed at the rear of the driver, it would create an additional air stiffness and would disturb the cone's movement. This issue is solved with the pattern created on the organic basket.

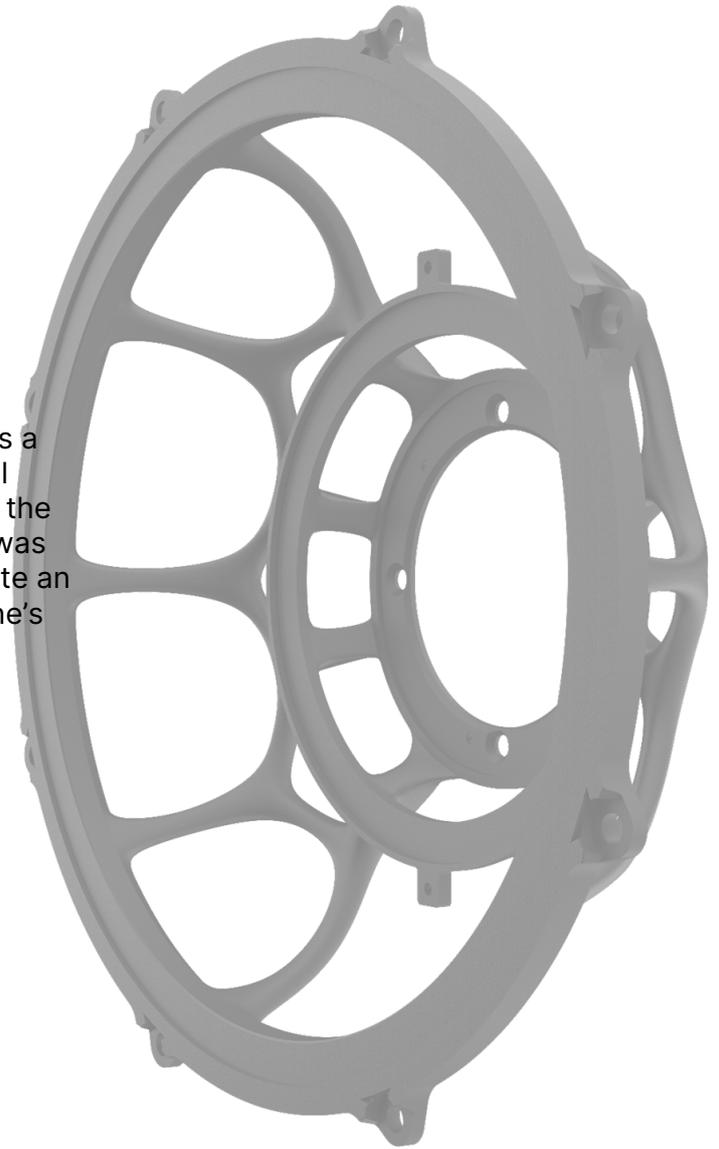


# 04. TECHNOLOGIES

## Camelia Surround pattern

The non-circular surround pattern allows to diminish the radial vibrations modes caused by the axis-symmetric coupling of the surround to the cone

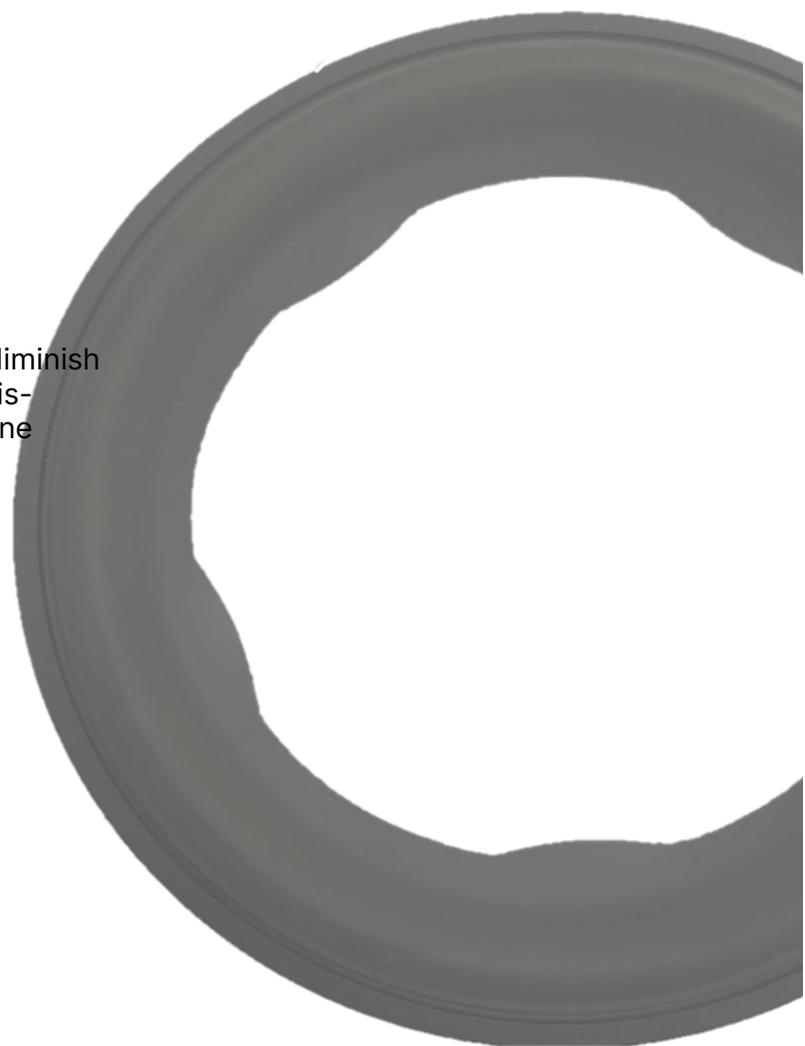

# 05. MOUNTING SYSTEM

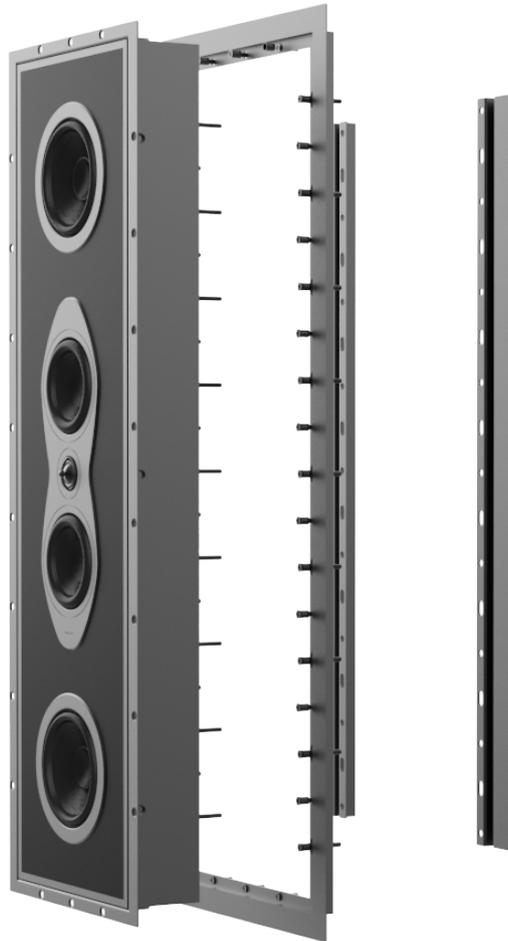

Thank you