
# Nordtrack<sup>™</sup> 1908 mobile impact crusher The small and agile powerhouse

### For the smaller jobsites where guick performance is valuated

Controlled from the user-friendly automation panel this compact unit provides extremely efficient throughput. The Nordtrack<sup>™</sup> 1908 is offered with wide variety of different impact hammers for many applications from martensitic hammers recommended for concrete crushing to chromium iron hammers for reclaimed asphalt crushing. Clutch-driven direct drive system provides highly efficient fuel consumption to crushing ratio and compact design saves on transportation costs.



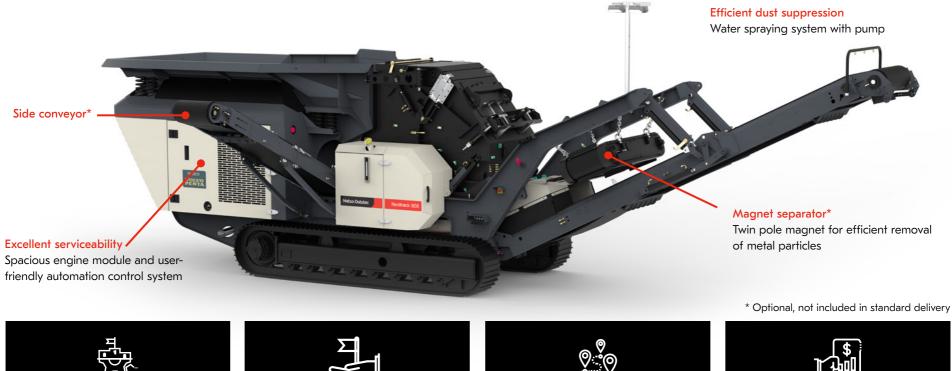

High performance crushing in a compact size







## Technical details Nordtrack™ I908

# Metso

Crusher



Feed opening 860 x 650 mm (34 x 25.6")

### Feeder



Hopper capacity 2.8 m<sup>3</sup> (3.6 yd<sup>3</sup>)

Options Multiple grizzly bar and punch plate aperture options with easily changeable cassette



Product conveyor 900 mm (36") wide Side conveyor (optional) Belt width 500 mm (20") Engine power options



 Tier 3 (Stage III A):

 Volvo D8 188 kW (252 hp)

 Tier 4F:

 Volvo D8 188 kW (252 hp)

 Stage V:

 Volvo D8 188 kW (252 hp)

### **Transport dimensions**



: Weight (252 hp) 23.6 t (5 Width (252 hp) 2.5 m (8 Height (252 hp) 3.0 m (1 Length

23.6 † (52,000 lb) Width 2.5 m (8' 2") Height 3.0 m (10')

9.3 m (30' 7")

