
Nordtrack™ 1908S mobile impact crusher A highly competitive recycling crusher

Designed to get crushing operations up and running quickly

The Nordtrack[™] 1908S mobile impact crusher provides high performance crushing in a very compact size. The hanging screen module with easy to use attachment system and the 180 degree radial conveyor makes this unit flexible enough for various types of jobs.

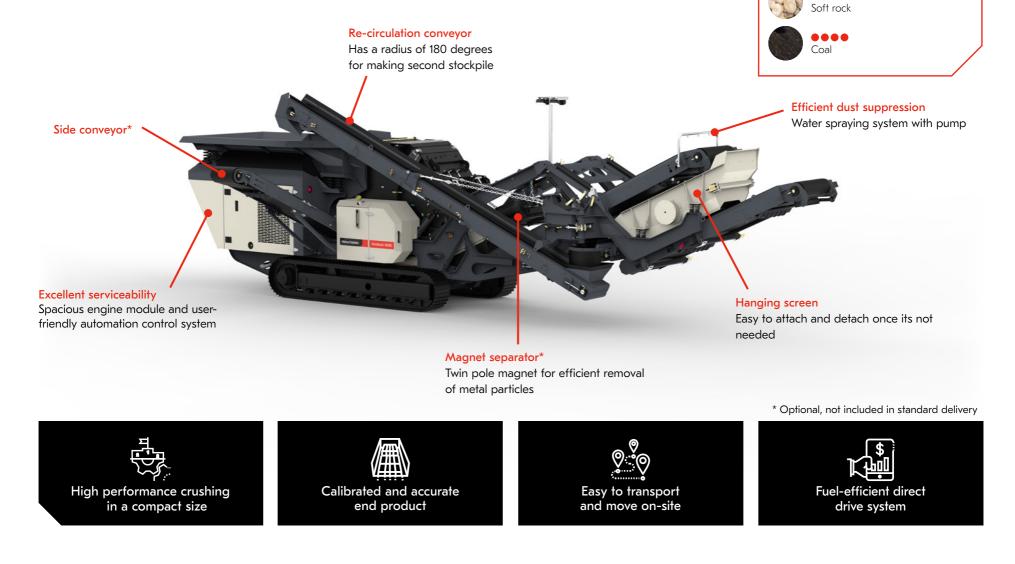

Areas of application:

Asphalt recycling

Bricks & tiles

Construction waste crushing

Technical details Nordtrack™ 1908S

Metso

Crusher



Feed opening 860 x 650 mm (34 x 25.6")





Hanging screen 2,000 x 1,100 mm (6'7" x 3'7") Screen angle 25 degrees Stroke 8 mm





Hopper capacity 2.8 m³ (3.6 yd³)

Options Multiple grizzly bar and punch plate aperture options with easily changeable cassette Conveyors



Main conveyor 900 mm (36″) wide

Product conveyor 900 mm (36") wide

Radial re-circulation conveyor 400 mm (16") wide

Side conveyor (optional) Belt width 500 mm (20") Engine power options



Tier 3 (Stage III A): Volvo D8 188 kW (252 hp)

Tier 4F: Volvo D8 188 kW (252 hp)

Stage V: Volvo D8 188 kW (252 hp) **Transport dimensions**



Weight 27.5 † (60,700 lb)

Width 2.7 m (8' 10")

Height 3.0 m (10')

Length 12.8 m (42')

