



SLVtec[®] 2025

SLV TECHNICAL LIGHTING CATALOGUE



STAY WELL-INFORMED

Scan QR code, select country and get our latest prices.
Visit us at **slv.com**

EASY TO INSTALL EFFICIENT MULTIFUNCTIONAL

EDITORIAL

TECHNOLOGY THAT MAKES
THE DIFFERENCE [06](#)

INDOOR

EASYLIGHT [06](#)

RETRO [16](#)

PANEL [26](#)

PAVANNO [34](#)

TRACKSPOT [38](#)

DOWNLIGHT [48](#)

UNIVERSAL DOWNLIGHT [56](#)

SURFACE [60](#)

BATTEN [64](#)

WATERPROOF [70](#)

HIGHBAY [82](#)

OUTDOOR

BULKHEAD [88](#)

FLOODLIGHT [92](#)




TECHNOLOGY THAT MAKES THE DIFFERENCE

As a reliable partner for electrical installers and the trade, we are constantly developing our product range – practical, future-oriented and with a clear focus on your day-to-day challenges. With **SLVtec®** we have created an independent brand dedicated entirely to the development of technical, functional and energy-efficient lighting solutions.

SLVtec® stands for uncompromising quality, innovative product features, high availability as well as quick and easy installation. Whether new build, modernisation or special application: with SLVtec® you can master any project confidently and efficiently.

FOLLOW THE BLUE STAR – THE NEW SLVtec® PRODUCT WORLD

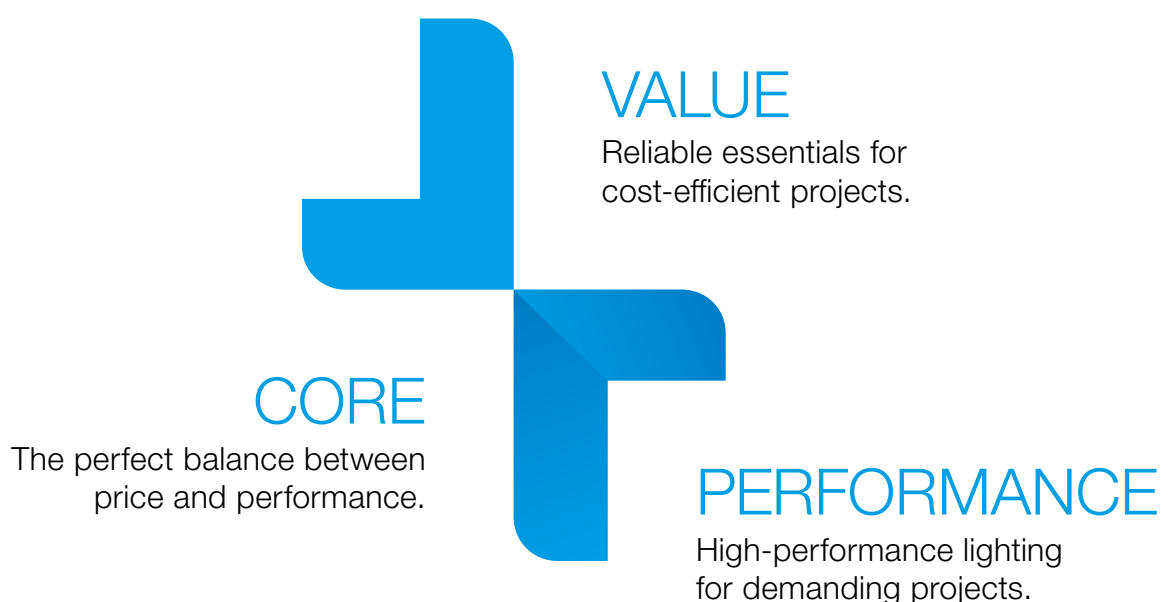

THREE PERFORMANCE CLASSES. COUNTLESS POSSIBILITIES. ONE ANSWER: SLVtec®.

Whether you are looking for cost-efficient basic lighting, the ideal balance between price and performance or sophisticated lighting solutions: SLVtec® has the right answer for you. All our products combine innovative technology, efficient light output and versatile applications for professionals who rely on function and quality every day.



EASY TO INSTALL, EFFICIENT AND MULTIFUNCTIONAL

The efficiency of modern technology is evident in the details. Our products not only offer excellent lighting quality, but also sophisticated features that make your daily work easier.

Easy to install: Intelligent mounting systems, tool-free cabling and innovative quick-release connectors make installation quick and easy, saving time and effort.

Outstanding energy efficiency: The majority of our products achieve a luminous efficiency of more than 120 lm/W.

Multifunctionality: With Multi-Colour and Multi-Lumen options, our lighting solutions can be tailored to suit your needs and are flexible to use.

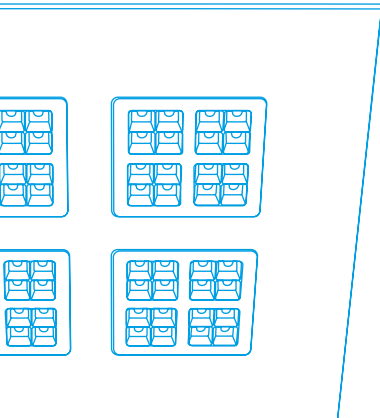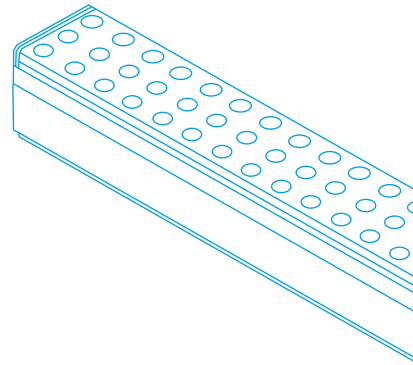

CUSTOMISED LIGHTING SOLUTIONS TO ORDER


In addition to our widely available stock programme, we also offer selected products designed specifically for specific projects. These items are available to order only – perfect for custom lighting designs and bespoke applications.

NO CHALLENGE IS TOO GREAT – SLVtec® PROVIDES THE SOLUTION

Standard or custom: discover our new portfolio and follow the blue star into a world of innovative technical lighting solutions. Your next project starts here – contact us!



Scan, discover, take off –
with the matching SLVtec® solution for your project on [slv.com](https://www.slv.com)

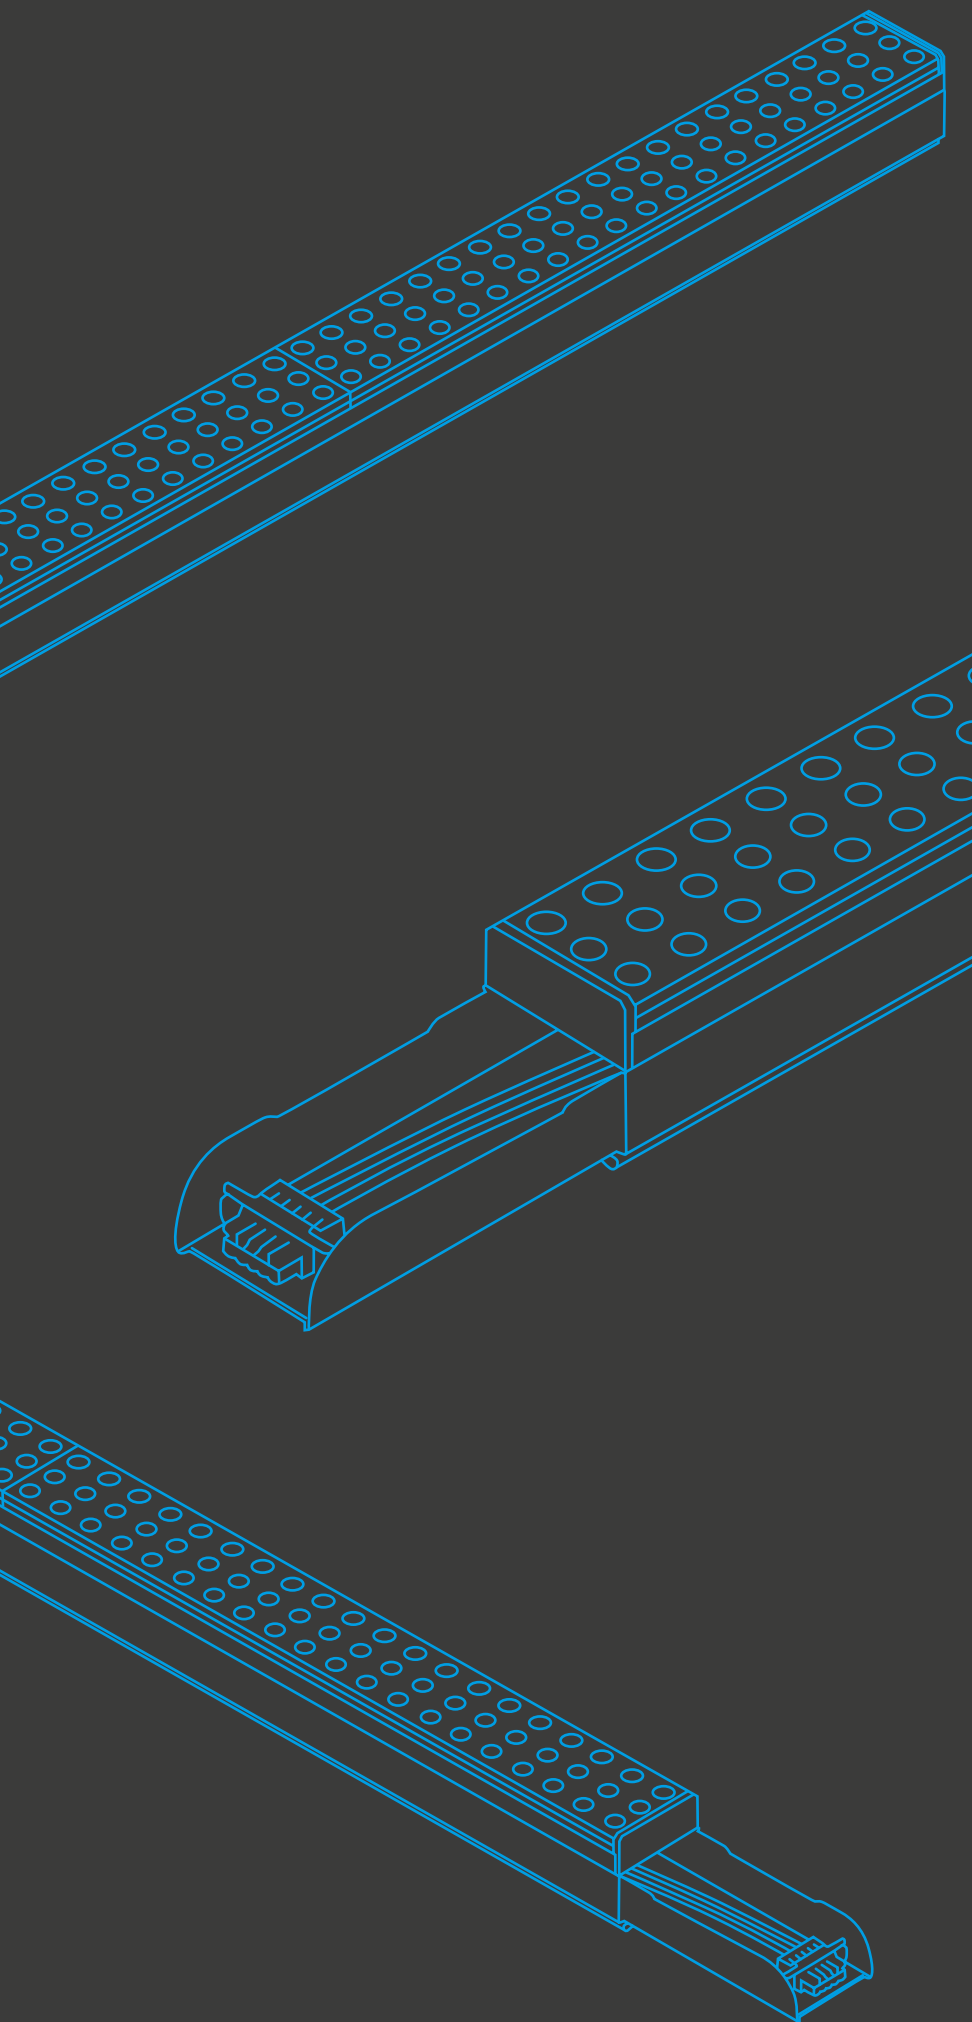

COMBINE



EASYLIGHT

+



accessories for different
types of mounting:
surface-mounted, cable
or chain suspension

=



EASYLIGHT

PRODUCT ADVANTAGES

High energy savings thanks to an **efficiency of up to 200 lm/W**

Service life up to **100,000 hours**

in five different beam angles. Other beam angles are available on request

EASY TO INSTALL thanks to tool-free assembly

Flexibly adjustable thanks to **Multi-Lumen** and **Multi-Colour**

DALI dimmable and **DC-capable**




**MULTI
LUMEN** **MULTI
COLOR**

up to
200 lm/W


BEAM ANGLE

WB

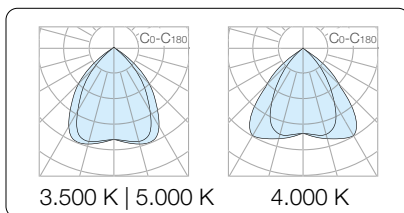

Wide light distribution for open areas such as supermarkets, logistics areas and showrooms. Ideal for uniform ambient lighting.


DA30

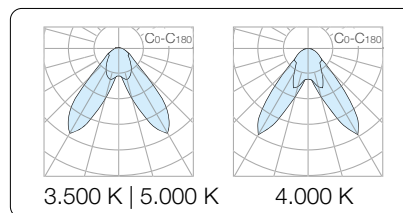

Asymmetrical, laterally directed light distribution for targeted illumination of wall surfaces, shelves or presentation zones – ideal for supermarkets or display areas.




MB

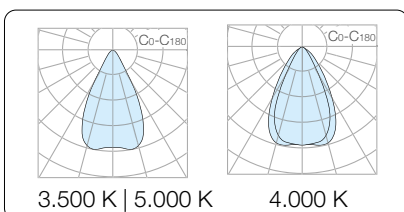


Balanced light distribution for production areas and workshops where uniform and efficient illumination over a medium width is required.

NB

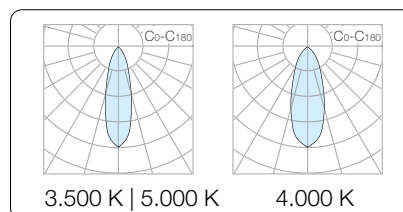

Focused light distribution for targeted illumination of high aisles or storage areas with narrow geometries – particularly effective at great heights.

Oval

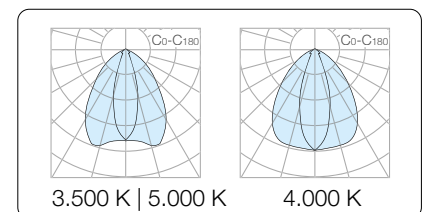

Elongated light distribution for corridors, hallways and busy areas – optimised for linear room geometries with uniform light distribution.

Other beam angles are available on request

EASYLIGHT

Efficient. Flexible. Systematic.

From industrial halls to supermarkets and logistics centres: EASYLIGHT is the high performance LED continuous-row lighting system for applications where flexibility, efficiency and reliability are required.

With an impressive efficiency of up to 200 lm/W, EASYLIGHT provides energy- and cost efficient lighting. Thanks to the innovative quick-fit system, EASYLIGHT can be installed in next to no time, significantly reducing your project times. The sophisticated design fits seamlessly into a wide range of applications. And with a service life of up to 100,000 hours, EASYLIGHT not only reduces maintenance costs, but also your operating costs in the long term.

EASYLIGHT AT A GLANCE

Up to 200 lm/W – particularly energy-efficient

Tool-free assembly – save time and effort


Power and CCT switch – adjustable system output and light colour

All variants are DC-capable – controllable and future-proof

Various beam angles, lengths and mounting types – can be flexibly combined

Seamless connection – continuous light line



EASY TO INSTALL

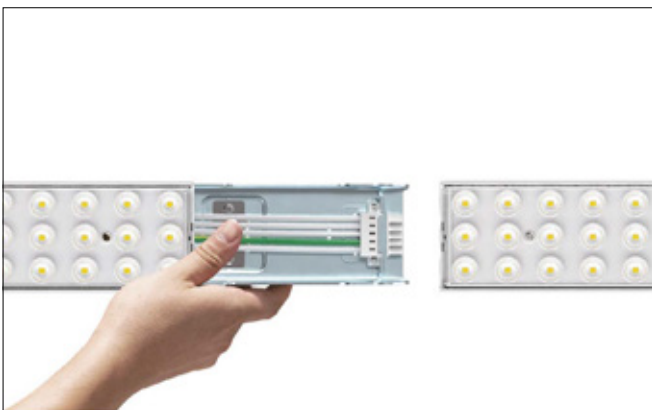

Quick, tool-free installation – electrical and mechanical connection of modules and lighting units in a single step.



Chain or cable suspension is equally quick and tool-free, for flexible adaptation to a wide range of building situations.

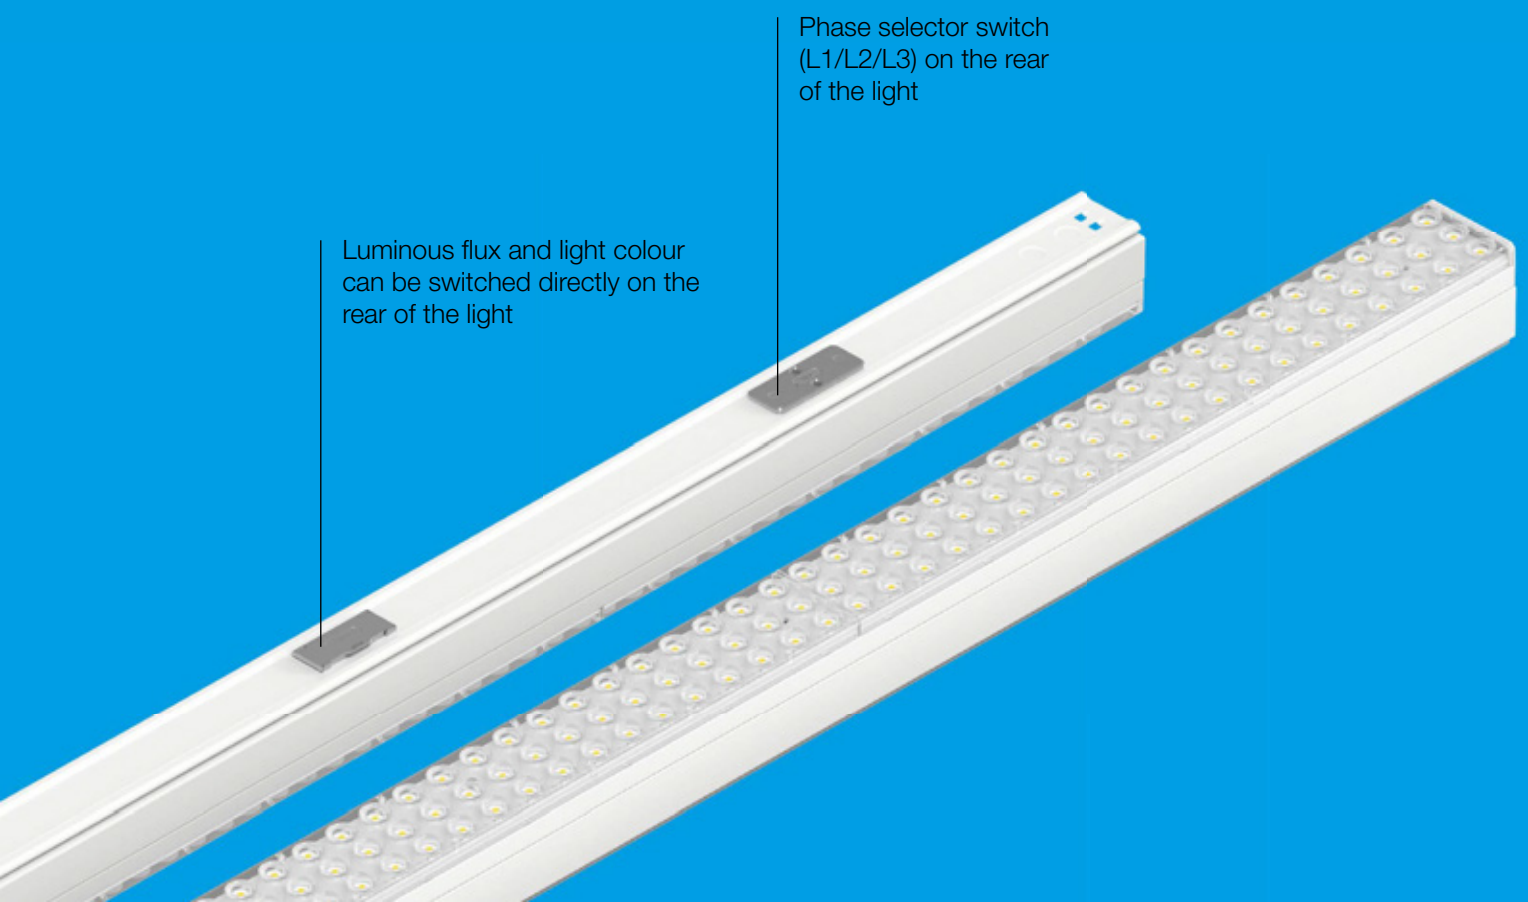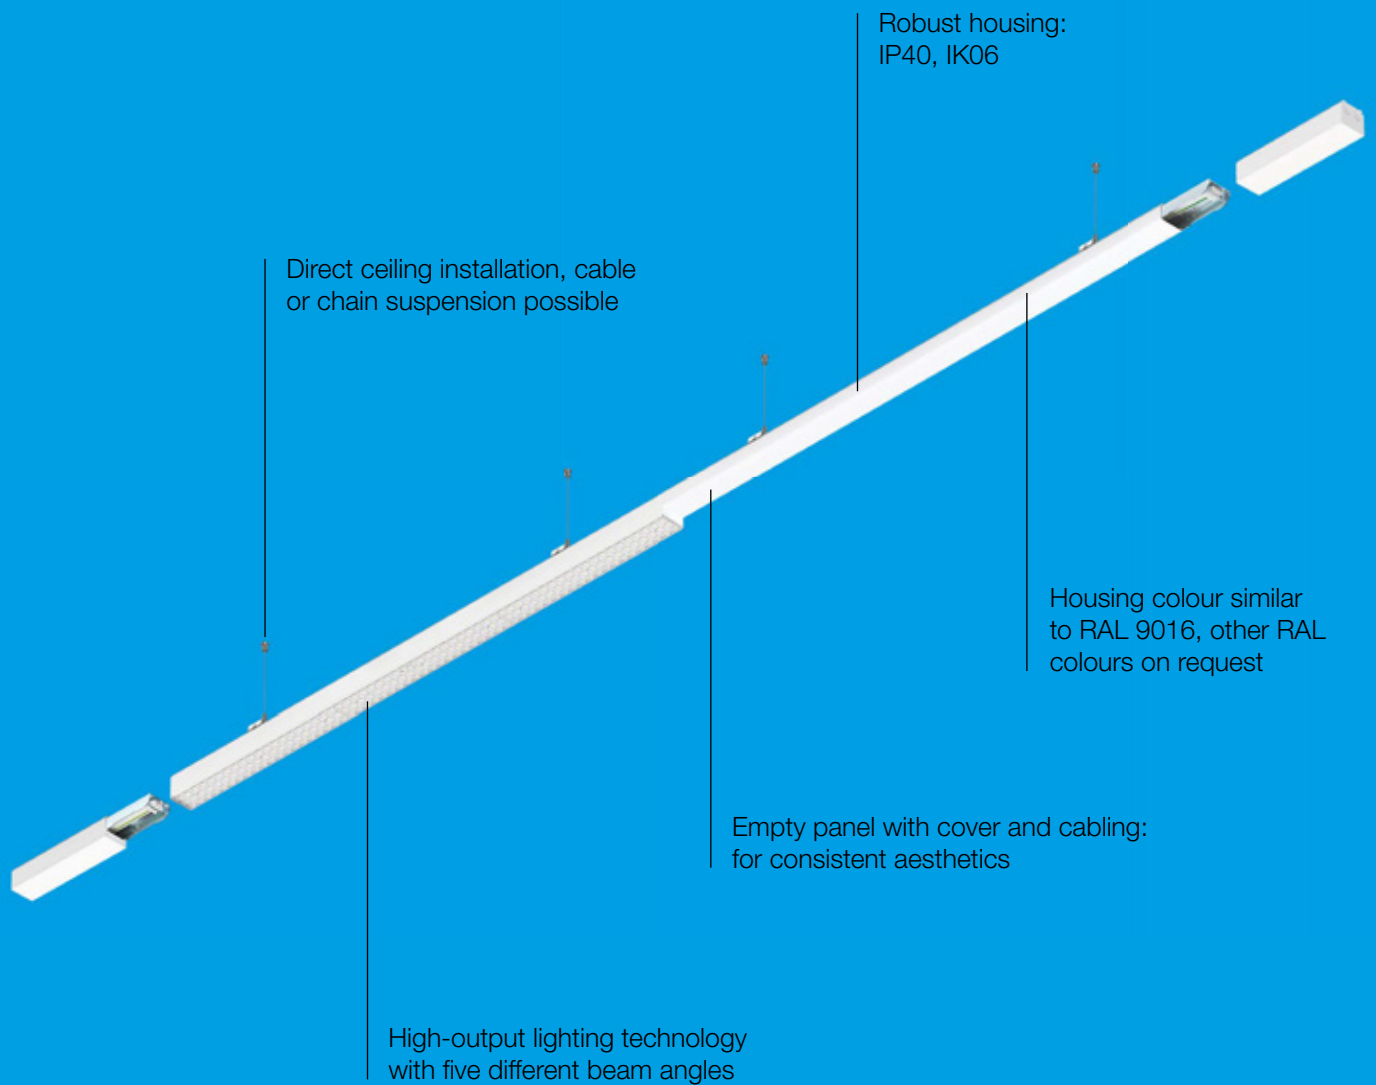

EASYLIGHT

INDOOR



EASYLIGHT



**MULTI
LUMEN**

**MULTI
COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
EASYLIGHT 1500 135 835/840/850 WB WH ML	○	75 W	220-240 V	13.000 lm	175 lm/W	3.500 K
				14.500 lm	195 lm/W	4.000 K
				14.200 lm	190 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 NB WH ML	○	75 W	220-240 V	13.000 lm	175 lm/W	3.500 K
				14.500 lm	195 lm/W	4.000 K
				14.200 lm	190 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 MB WH ML	○	75 W	220-240 V	13.000 lm	175 lm/W	3.500 K
				14.500 lm	195 lm/W	4.000 K
				14.200 lm	190 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 OVAL WH ML	○	75 W	220-240 V	13.000 lm	175 lm/W	3.500 K
				14.500 lm	195 lm/W	4.000 K
				14.200 lm	190 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 DA30 WH ML	○	75 W	220-240 V	13.000 lm	175 lm/W	3.500 K
				14.500 lm	195 lm/W	4.000 K
				14.200 lm	190 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 WB ML DALI2	○	75 W	220-240 V	12.500 lm	170 lm/W	3.500 K
				14.000 lm	190 lm/W	4.000 K
				13.500 lm	185 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 NB ML DALI2	○	75 W	220-240 V	12.500 lm	170 lm/W	3.500 K
				14.000 lm	190 lm/W	4.000 K
				13.500 lm	185 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 MB ML DALI2	○	75 W	220-240 V	12.500 lm	170 lm/W	3.500 K
				14.000 lm	190 lm/W	4.000 K
				13.500 lm	185 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 OVAL ML DALI2	○	75 W	220-240 V	12.500 lm	170 lm/W	3.500 K
				14.000 lm	190 lm/W	4.000 K
				13.500 lm	185 lm/W	5.000 K
EASYLIGHT 1500 135 835/840/850 DA30 ML DALI2	○	75 W	220-240 V	12.500 lm	170 lm/W	3.500 K
				14.000 lm	190 lm/W	4.000 K
				13.500 lm	185 lm/W	5.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	GBP
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2,8 kg	On / Off	✓	S	1009207	170.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2,8 kg	On / Off	✓	O	1009208	170.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2,8 kg	On / Off	✓	S	1009209	170.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2,8 kg	On / Off	✓	S	1009210	170.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2,8 kg	On / Off	✓	O	1009211	170.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	2,8 kg	DALI	✓	S	1009212	213.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	2,8 kg	DALI	✓	O	1009213	213.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	2,8 kg	DALI	✓	S	1009214	213.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	2,8 kg	DALI	✓	S	1009215	213.00
100.000h L80B10	>80	7*2,5 mm ²	-20° + 40°C	2,8 kg	DALI	✓	O	1009216	213.00

EASYLIGHT

INDOOR



EASYLIGHT



MULTI LUMEN **MULTI COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
EASYLIGHT 2500 140 835/840/850 WB WH ML	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 140 835/840/850 NB WH ML	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 140 835/840/850 MB WH ML	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 140 835/840/850 OVAL WH ML	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 140 835/840/850 DA30 WH ML	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 150 835/840/850 WB WH ML DALI2	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 150 835/840/850 NB WH ML DALI2	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 150 835/840/850 MB WH ML DALI2	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 150 835/840/850 OVAL WH ML DALI2	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K
EASYLIGHT 2500 150 835/840/850 DA30 WH ML DALI2	○	80 W	220-240 V	14.000 lm	175 lm/W	3.500 K
				15.000 lm	190 lm/W	4.000 K
				15.000 lm	190 lm/W	5.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	GBP
100.000h L80B10	>80	5°2,5 mm²	-20° + 40°C	4,6 kg	On / Off	✓	S	1009217	272.00
100.000h L80B10	>80	5°2,5 mm²	-20° + 40°C	4,6 kg	On / Off	✓	O	1009218	272.00
100.000h L80B10	>80	5°2,5 mm²	-20° + 40°C	4,6 kg	On / Off	✓	S	1009219	272.00
100.000h L80B10	>80	5°2,5 mm²	-20° + 40°C	4,6 kg	On / Off	✓	S	1009220	272.00
100.000h L80B10	>80	5°2,5 mm²	-20° + 40°C	4,6 kg	On / Off	✓	O	1009221	272.00
100.000h L80B10	>80	7°2,5 mm²	-20° + 40°C	4,6 kg	DALI	✓	S	1009222	315.00
100.000h L80B10	>80	7°2,5 mm²	-20° + 40°C	4,6 kg	DALI	✓	O	1009223	315.00
100.000h L80B10	>80	7°2,5 mm²	-20° + 40°C	4,6 kg	DALI	✓	S	1009224	315.00
100.000h L80B10	>80	7°2,5 mm²	-20° + 40°C	4,6 kg	DALI	✓	S	1009225	315.00
100.000h L80B10	>80	7°2,5 mm²	-20° + 40°C	4,6 kg	DALI	✓	O	1009226	315.00

EASYLIGHT

INDOOR




L x W x H (mm):
300 x 65 x 60



L x W x H (mm):
300 x 65 x 60




L x W x H (mm):
436 x 65 x 60



L x W x H (mm):
436 x 65 x 60

Product designation	Colour	Availability*	Prod no.	GBP
EASYLIGHT FIB 300 5 25 WH	○	S	1009230	38.00
EASYLIGHT FIB 300 7 25 WH	○	S	1009231	38.00
EASYLIGHT FOB 300 5 25 WH	○	S	1009232	47.00
EASYLIGHT FOB 300 7 25 WH	○	S	1009233	55.00

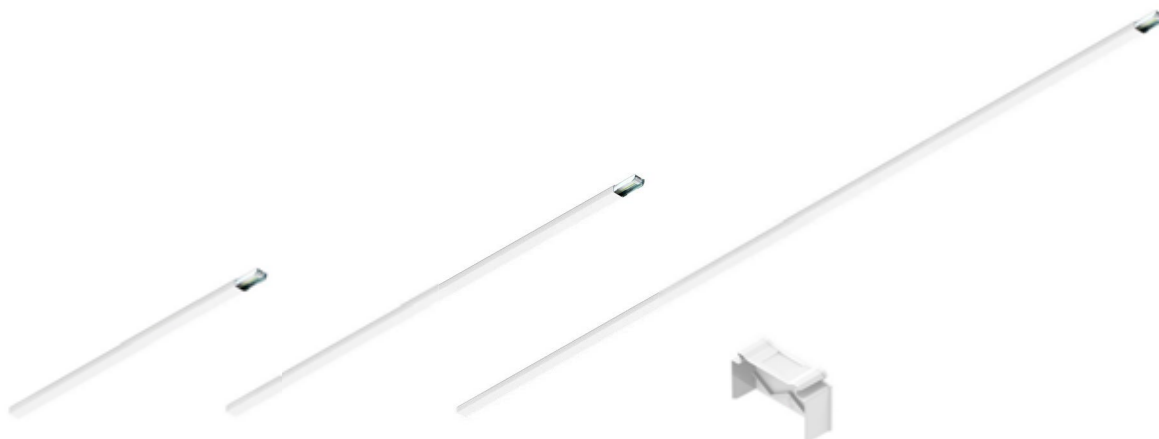

L x W x H (mm):
1.500 x 65 x 42

L x W x H (mm):
2.500 x 65 x 42

L x W x H (mm):
4.500 x 65 x 42

W x H (mm):
65 x 60


Product designation	Colour	Availability*	Prod no.	GBP
EASYLIGHT BC 1500 5 25 WH	○	S	1009234	43.00
EASYLIGHT BC 1500 7 25 WH	○	S	1009235	49.00
EASYLIGHT BC 2500 5 25 WH	○	S	1009236	64.00
EASYLIGHT BC 2500 7 25 WH	○	S	1009237	72.00
EASYLIGHT BC 4500 5 25 WH	○	O	1009238	102.00
EASYLIGHT BC 4500 7 25 WH	○	O	1009239	115.00
EASYLIGHT EC WH	○	O	1009240	4.00

An extensive range of accessories, such as emergency lighting modules and spotlights, is available on request.

*S = in stock
O = to order



Product designation	Colour	Availability*	Prod no.	GBP
EASYLIGHT CSK		S	1009241	7.00
EASYLIGHT CSK FT		S	1009242	9.00
EASYLIGHT SCK 5000		O	1009247	15.00
EASYLIGHT SCF M6		S	1009244	6.00
EASYLIGHT SCF M10		S	1009245	6.00
EASYLIGHT STM		O	1009246	6.00

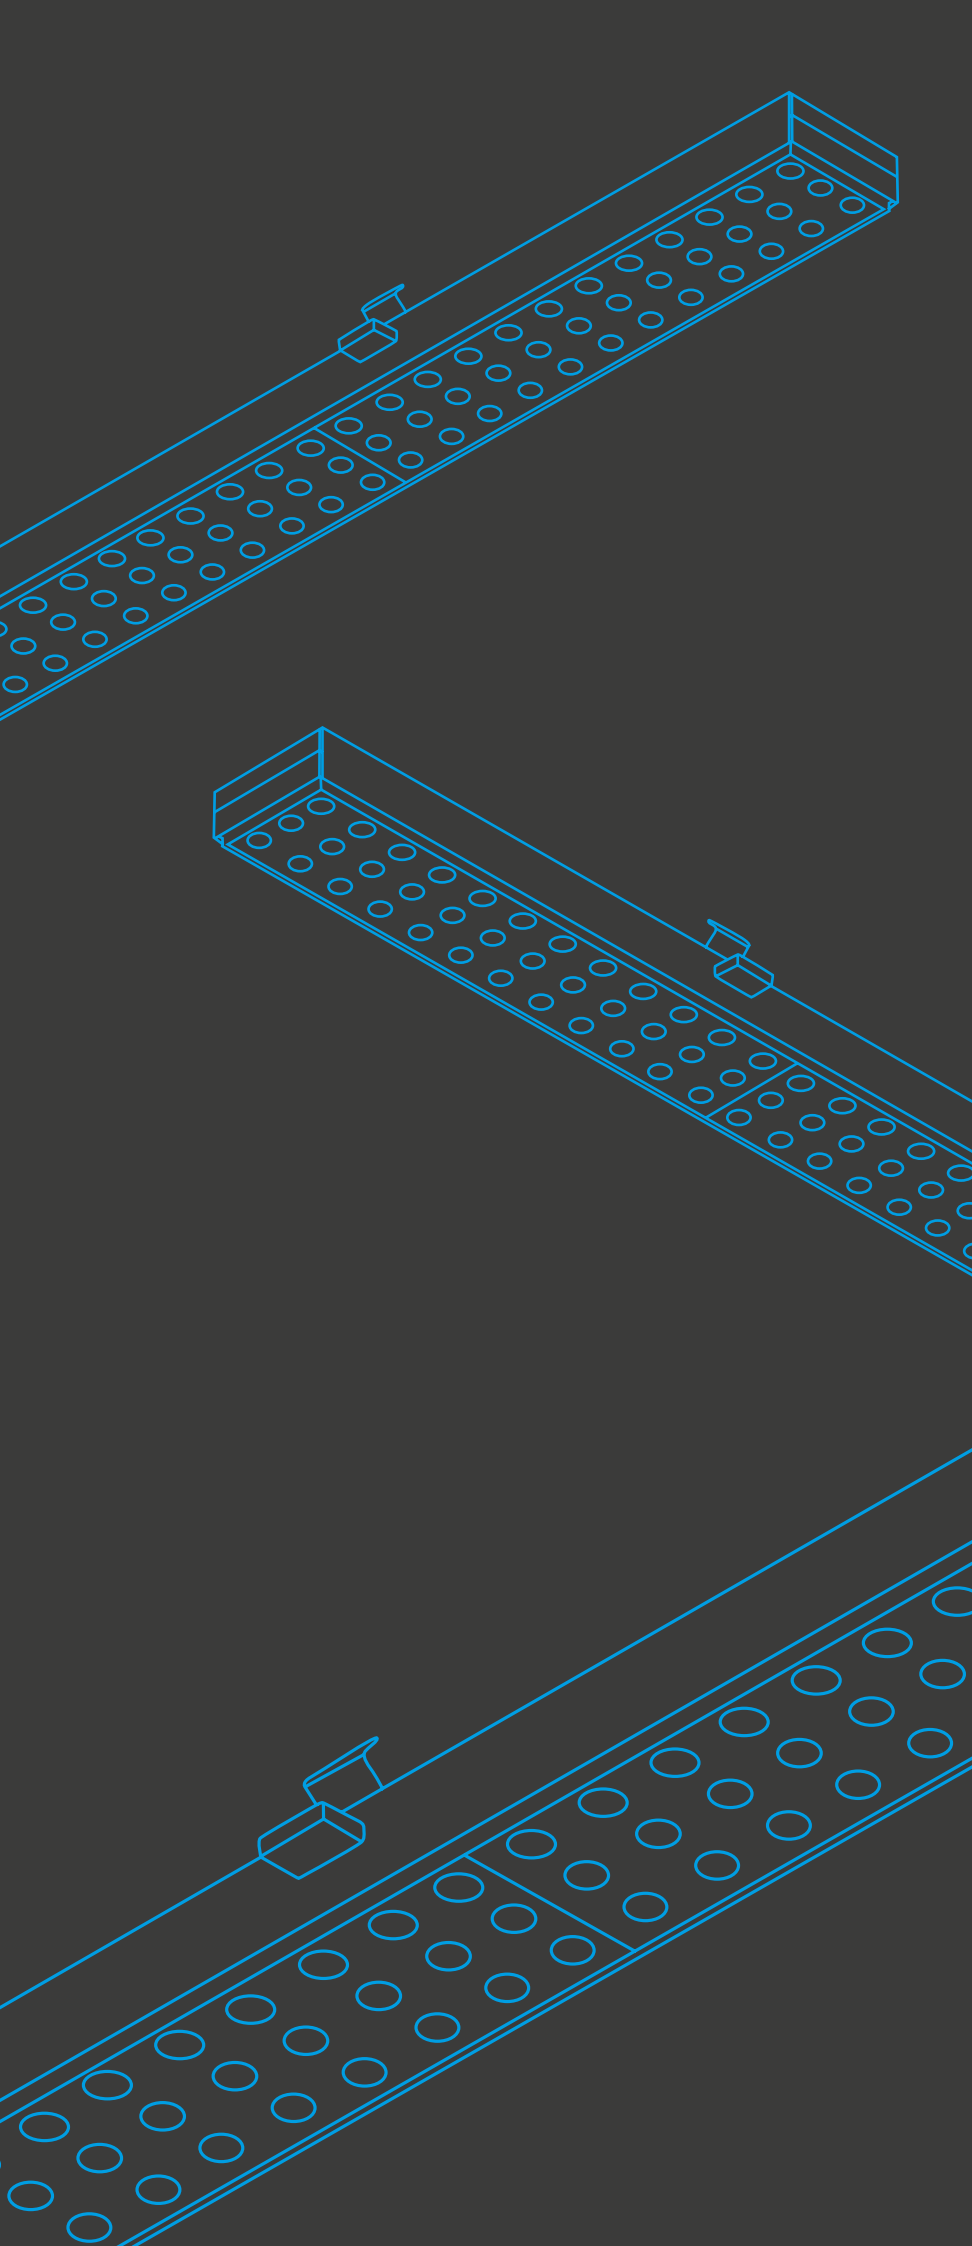

Simply remove the old
light carrier and replace it
with RETRO.

RETRO

PRODUCT ADVANTAGES

1:1 replacement of existing T8/T5 continuous-row systems in under 1 minute

Compatible with standard trunking from well-known manufacturers

High energy savings thanks to an **Efficiency of up to 190 lm/W**

Service life up to **100,000 hours**

EASY TO INSTALL Thanks to Click Design for tool-free installation

Flexibly customisable thanks to four different beam angles **Multi-Lumen** and **Multi-Colour**

DALI-dimmable and **DC-capable**


up to 190
lm/W

**MULTI
LUMEN** **MULTI
COLOR**




BEAM ANGLE

WB

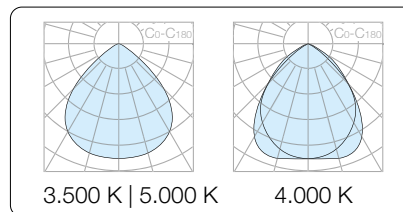


Wide light distribution for open areas such as supermarkets, logistics areas and showrooms. Ideal for uniform ambient lighting.

NB

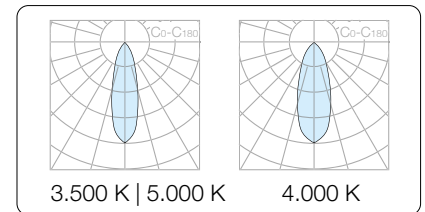


Focused light distribution for targeted illumination of high aisles or storage areas with narrow geometries – particularly effective at great heights.

MB

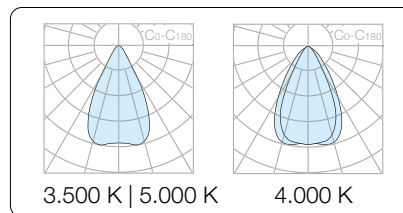

Balanced light distribution for production areas and workshops where uniform and efficient illumination over a medium width is required.

Oval

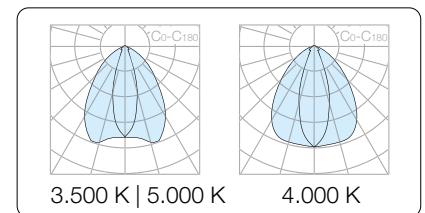

Elongated light distribution for corridors, hallways and busy areas – optimised for linear room geometries with uniform light distribution.

RETRO

The quickest way to modernise a lighting system.

The RETRO LED system was specially developed for quick and easy retrofitting of existing T8 and T5 continuous-row lighting systems. Thanks to the ingenious Click Design, replacement is possible in less than a minute - no tools or conversions required. The modules are compatible with a wide range of popular trunking systems and offer a significantly higher efficiency of up to 190 lm/W.

Output and light colour can be adjusted on site using the power and CCT switch for maximum project flexibility. Various beam angles, DALI options and a service life of up to 100,000 hours make RETRO the ideal solution for demanding modernisation projects in industry, retail and logistics.

RETRO AT A GLANCE

1:1 replacement for existing T8/T5 fluorescent lamps

Compatible with top brand trunking

Up to 190 lm/W luminous efficiency


Click assembly without tools


Integrated power and CCT switch

Various beam angles and lengths for maximum flexibility



1:1 SOLUTION

With the RETRO LED module, you can convert your existing trunking system to LED with no tools in just 44 seconds!


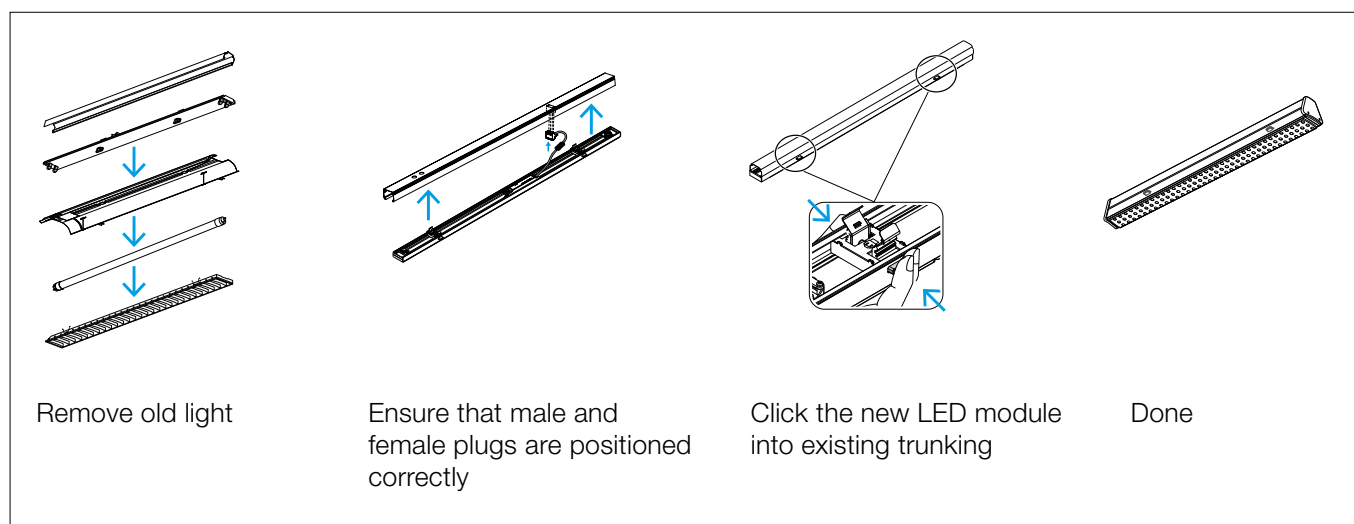


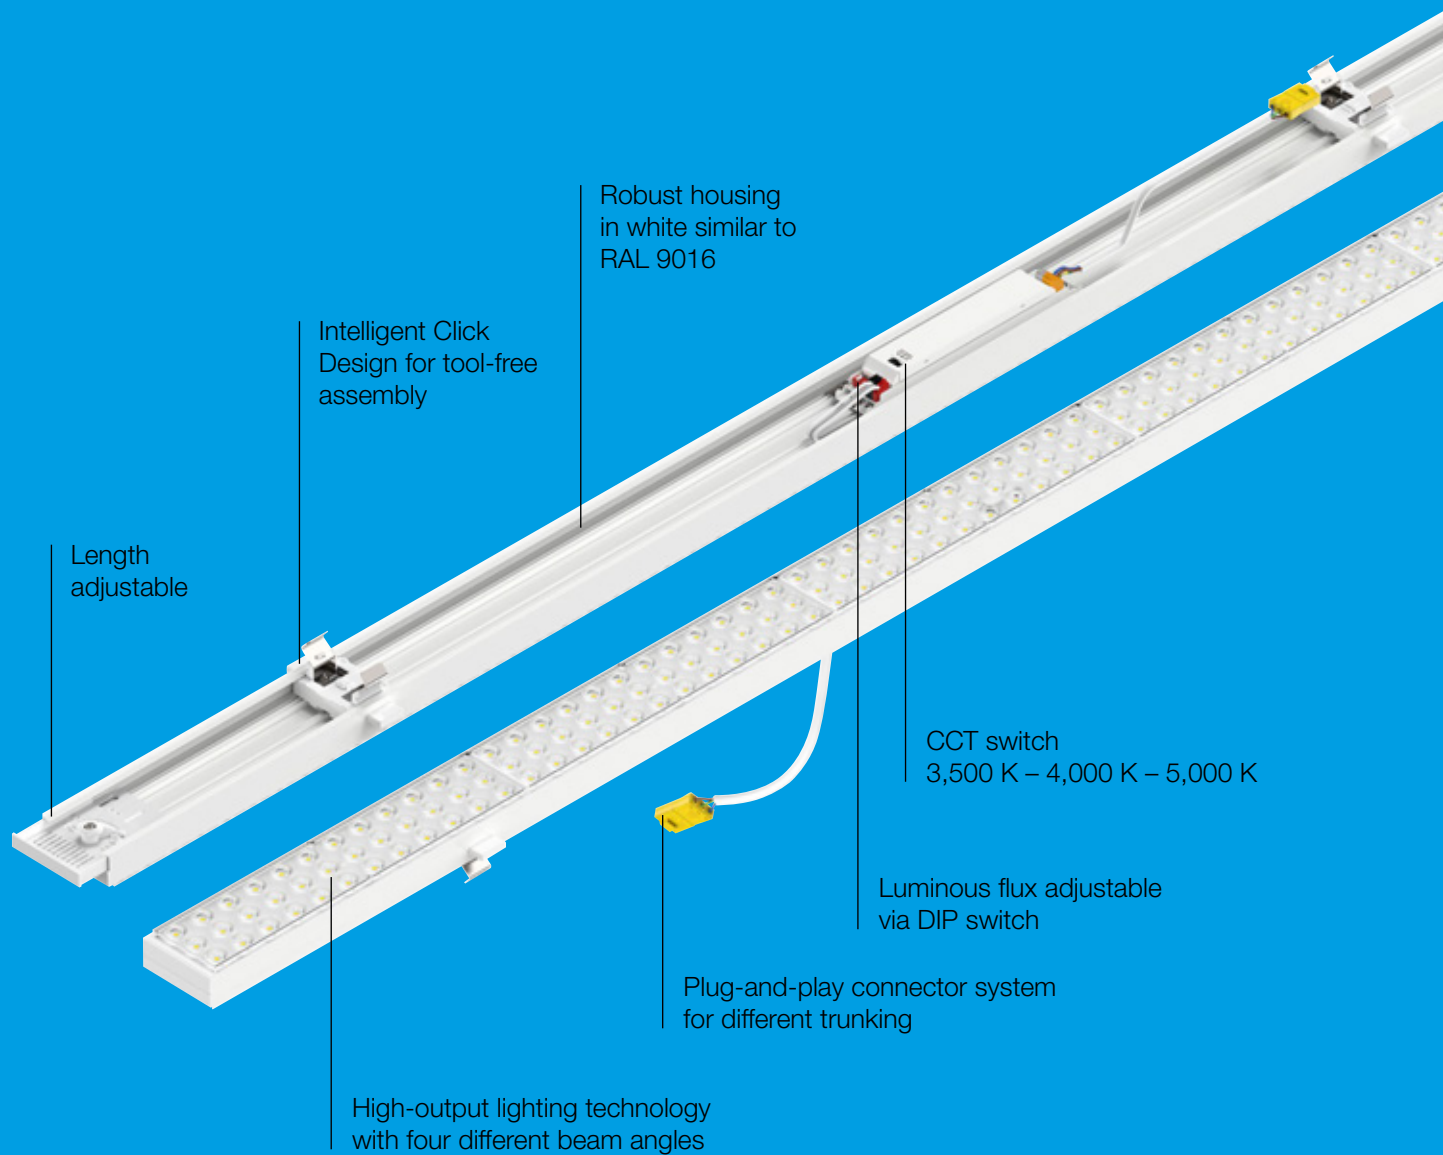

Easy adjustment to the desired length



1175 mm to 1237 mm



1475 mm to 1537 mm

RETRO

INDOOR



RETRO







**MULTI
LUMEN**

**MULTI
COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
RETRO LT 1200 110 835/840/850 WB ML WH	○	61 W	220-240 V	10.200 lm	170 lm/W	3.500 K
				11.000 lm	185 lm/W	4.000 K
				10.800 lm	180 lm/W	5.000 K
RETRO LT 1200 110 835/840/850 MB ML WH	○	61 W	220-240 V	10.200 lm	170 lm/W	3.500 K
				11.000 lm	185 lm/W	4.000 K
				10.800 lm	180 lm/W	5.000 K
RETRO LT 1200 110 835/840/850 NB ML WH	○	61 W	220-240 V	10.200 lm	170 lm/W	3.500 K
				11.000 lm	185 lm/W	4.000 K
				10.800 lm	180 lm/W	5.000 K
RETRO LT 1200 110 835/840/850 OVAL ML WH	○	61 W	220-240 V	10.200 lm	170 lm/W	3.500 K
				11.000 lm	185 lm/W	4.000 K
				10.800 lm	180 lm/W	5.000 K
RETRO LT 1200 107 835/840/850 WB ML WH DALI	○	60 W	220-240 V	10.300 lm	173 lm/W	3.500 K
				11.400 lm	190 lm/W	4.000 K
				11.000 lm	185 lm/W	5.000 K
RETRO LT 1200 107 835/840/850 MB ML WH DALI	○	60 W	220-240 V	10.300 lm	173 lm/W	3.500 K
				11.400 lm	190 lm/W	4.000 K
				11.000 lm	185 lm/W	5.000 K
RETRO LT 1200 107 835/840/850 NB ML WH DALI	○	60 W	220-240 V	10.300 lm	173 lm/W	3.500 K
				11.400 lm	190 lm/W	4.000 K
				11.000 lm	185 lm/W	5.000 K
RETRO LT 1200 107 835/840/850 OVAL ML WH DALI	○	60 W	220-240 V	10.300 lm	173 lm/W	3.500 K
				11.400 lm	190 lm/W	4.000 K
				11.000 lm	185 lm/W	5.000 K

*S = in stock
O = to order

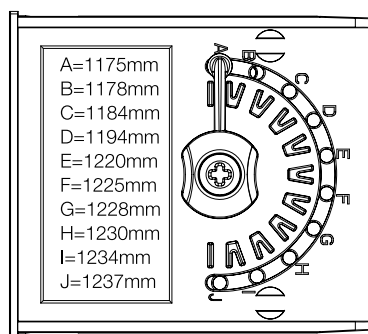

	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	GBP
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,4 kg	On / Off	✓	O	1009179	136.00
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,4 kg	On / Off	✓	O	1009180	136.00
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,4 kg	On / Off	✓	O	1009181	136.00
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,4 kg	On / Off	✓	O	1009182	136.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,4 kg	DALI	✓	O	1009183	179.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,4 kg	DALI	✓	O	1009184	179.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,4 kg	DALI	✓	O	1009185	179.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,4 kg	DALI	✓	O	1009186	179.00

RETRO

INDOOR



RETRO





**MULTI
LUMEN**

**MULTI
COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
RETRO LT 1500 135 835/840/850 WB ML WH	○	75 W	220-240 V	10.700 lm	173 lm/W	3.500 K
				11.700 lm	192 lm/W	4.000 K
				11.500 lm	185 lm/W	5.000 K
RETRO LT 1500 135 835/840/850 MB ML WH	○	75 W	220-240 V	10.700 lm	173 lm/W	3.500 K
				11.700 lm	192 lm/W	4.000 K
				11.500 lm	185 lm/W	5.000 K
RETRO LT 1500 135 835/840/850 NB ML WH	○	75 W	220-240 V	10.700 lm	173 lm/W	3.500 K
				11.700 lm	192 lm/W	4.000 K
				11.500 lm	185 lm/W	5.000 K
RETRO LT 1500 135 835/840/850 OVAL ML WH	○	75 W	220-240 V	10.700 lm	173 lm/W	3.500 K
				11.700 lm	192 lm/W	4.000 K
				11.500 lm	185 lm/W	5.000 K
RETRO LT 1500 133 835/840/850 WB ML WH DALI	○	75 W	220-240 V	12.800 lm	170 lm/W	3.500 K
				13.800 lm	185 lm/W	4.000 K
				13.500 lm	180 lm/W	5.000 K
RETRO LT 1500 133 835/840/850 MB ML WH DALI	○	75 W	220-240 V	12.800 lm	170 lm/W	3.500 K
				13.800 lm	185 lm/W	4.000 K
				13.500 lm	180 lm/W	5.000 K
RETRO LT 1500 133 835/840/850 NB ML WH DALI	○	75 W	220-240 V	12.800 lm	170 lm/W	3.500 K
				13.800 lm	185 lm/W	4.000 K
				13.500 lm	180 lm/W	5.000 K
RETRO LT 1500 133 835/840/850 OVAL ML WH DALI	○	75 W	220-240 V	12.800 lm	170 lm/W	3.500 K
				13.800 lm	185 lm/W	4.000 K
				13.500 lm	180 lm/W	5.000 K

*S = in stock
O = to order

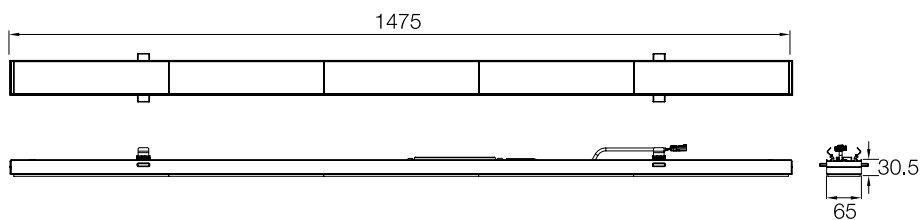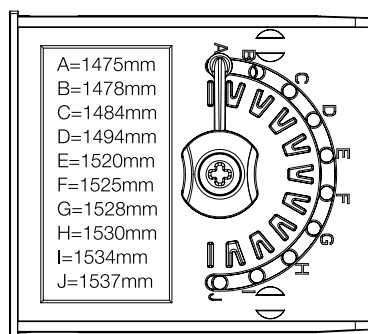

	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	GBP
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,7 kg	On / Off	✓	O	1009187	153.00
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,7 kg	On / Off	✓	O	1009188	153.00
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,7 kg	On / Off	✓	O	1009189	153.00
100.000h L80B10	>80	3-adrig	-20° + 40°C	1,7 kg	On / Off	✓	O	1009190	153.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,7 kg	DALI	✓	O	1009191	187.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,7 kg	DALI	✓	O	1009192	187.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,7 kg	DALI	✓	O	1009193	187.00
100.000h L80B10	>80	5-adrig	-20° + 40°C	1,7 kg	DALI	✓	O	1009194	187.00

RETRO

INDOOR



CONNECTORS FOR ON / OFF


Product designation	Colour	Availability*	Prod no.	GBP
RETRO CON 3P001	○	S	1009195	14.00
RETRO CON 3P002	○	S	1009196	14.00
RETRO CON 3P003	○	S	1009197	14.00
RETRO CON 3P004	○	S	1009198	14.00
RETRO CON 3P005	○	S	1009199	14.00
RETRO CON 3P006	○	S	1009200	14.00
RETRO CON 3P007	○	S	1009201	14.00

*S = in stock
O = to order



CONNECTORS FOR DALI

Product designation	Colour	Availability*	Prod no.	GBP
RETRO CON 5P101	○	○	1009202	19.00
RETRO CON 5P102	○	○	1009203	19.00
RETRO CON 5P103	○	○	1009204	19.00
RETRO CON 5P104	○	○	1009205	19.00
RETRO CON 5P105	○	○	1009206	19.00

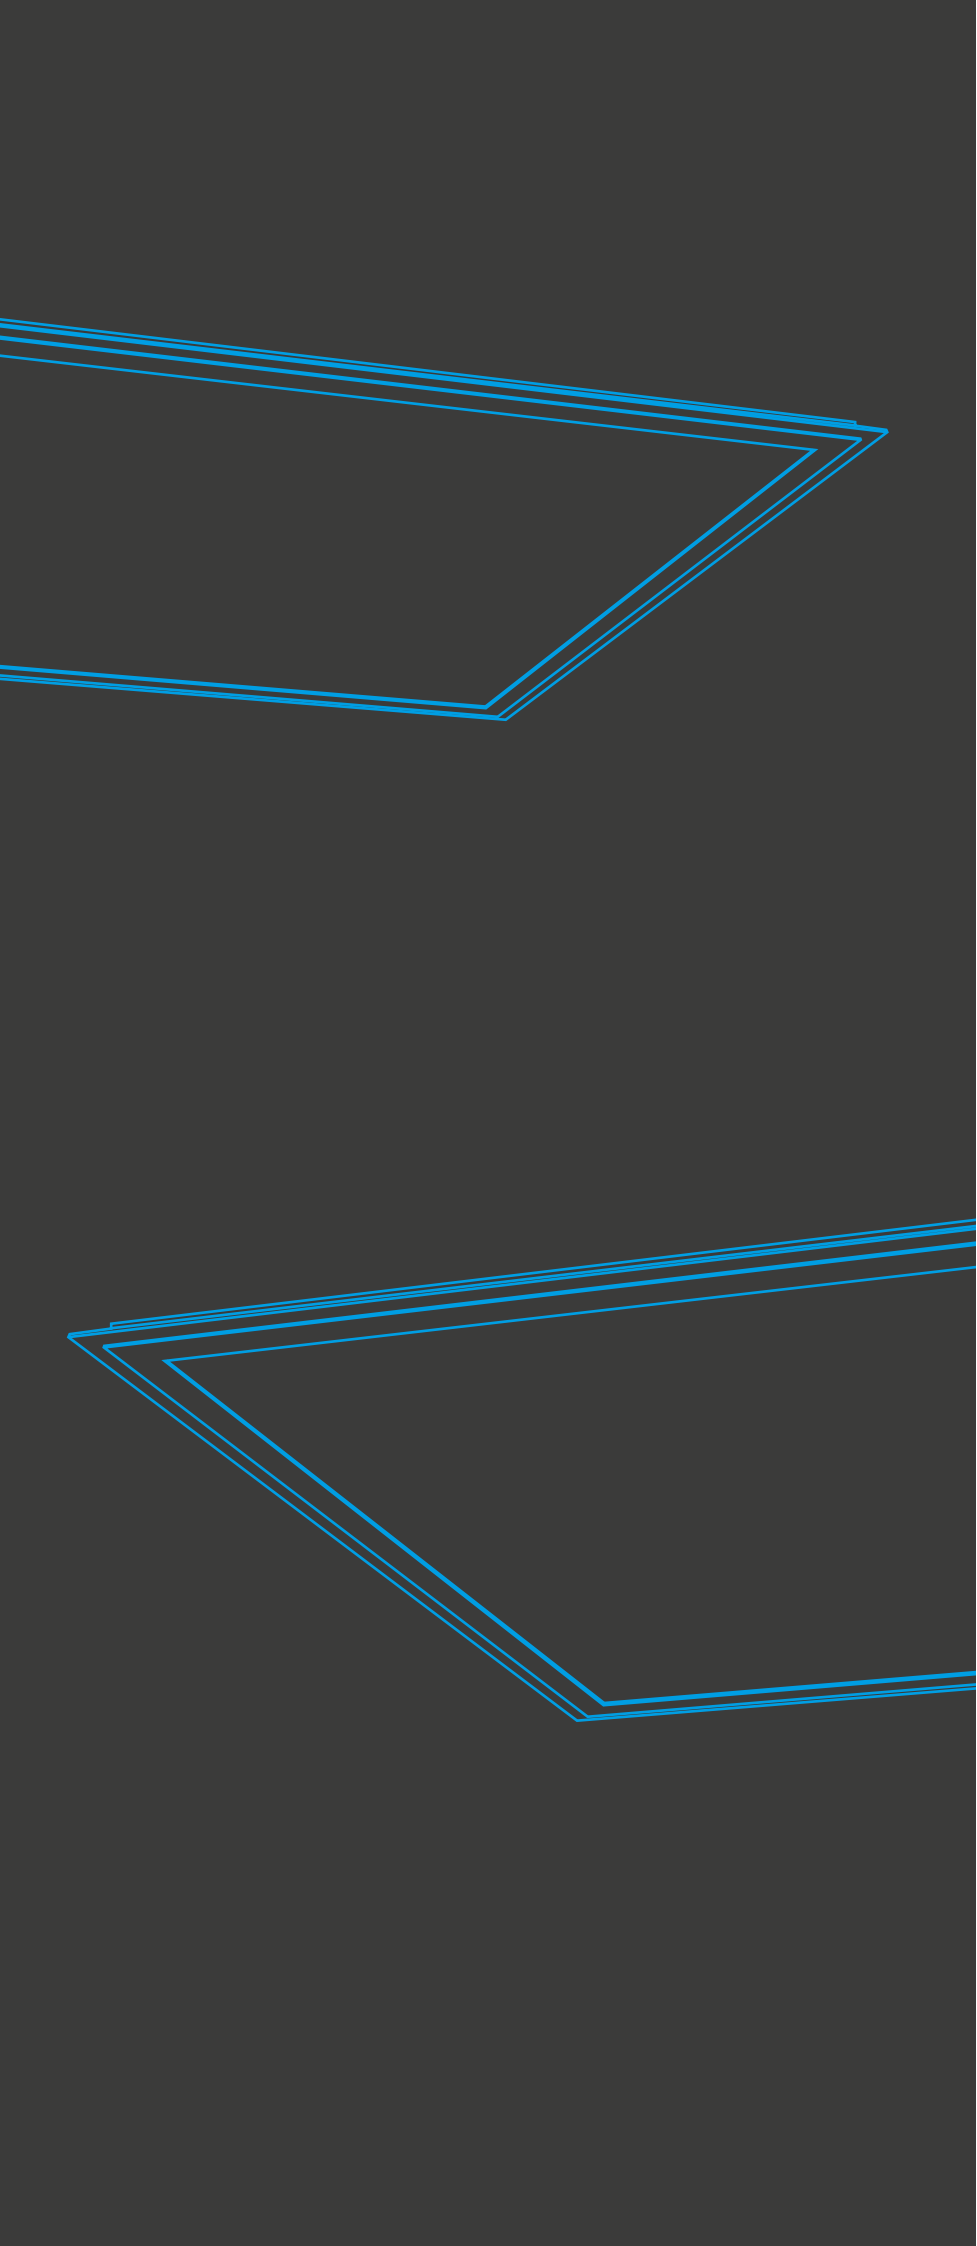

COMBINE



PANEL



surface-mounted or
recessed mounting frame



When purchasing a PANEL the mounting frame
is not included as standard.

PANEL

PRODUCT ADVANTAGES

High energy savings thanks to an **efficiency of up to 200 lm/W** (depending on model at least 120 lm/W)

Especially **high energy savings** when using the PANEL P

Can be used as **office lighting thanks to UGR<19**

EASY TO INSTALL thanks to integrated through-wiring and external ballast

Flexibly adjustable thanks to **Multi-Lumen** (all variants) and **Multi-Colour** (PANEL V & C)

All DALI variants support **DC operation**

**MULTI
LUMEN** **MULTI
COLOR**

up to
200 lm/W

PRODUCT VARIANTS

	PANEL V	PANEL C	PANEL P
Service life	50.000h L80B10	70.000h L80B10	100.000h L80B50
Energy efficiency	up to 126 lm/W	up to 136 lm/W	up to 203 lm/W
UGR	<19 / <22	<19	<19
Control	Multi-Lumen, On / Off, DALI	Multi-Lumen, On / Off, DALI	Multi-Lumen, On / Off, DALI

PANEL

INDOOR



PANEL V



**MULTI
LUMEN**

**MULTI
COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
PANEL V 600 830 / 840, 34 W	○	34 W	220-240 V	4.100 lm	121 lm/W	3.000 K
				4.300 lm	126 lm/W	4.000 K
PANEL V 600 830 / 840, 34 W, UGR	○	34 W	220-240 V	4.000 lm	118 lm/W	3.000 K
				4.200 lm	124 lm/W	4.000 K
PANEL V DALI 600 830 / 840, 34 W, UGR	○	34 W	220-240 V	4.000 lm	118 lm/W	3.000 K
				4.200 lm	124 lm/W	4.000 K
PANEL V 625 830 / 840, 34 W	○	34 W	220-240 V	4.100 lm	121 lm/W	3.000 K
				4.300 lm	126 lm/W	4.000 K
PANEL V 625 830 / 840, 34 W, UGR	○	34 W	220-240 V	4.000 lm	118 lm/W	3.000 K
				4.200 lm	124 lm/W	4.000 K
PANEL V DALI 625 830 / 840, 34 W, UGR	○	34 W	220-240 V	4.000 lm	118 lm/W	3.000 K
				4.200 lm	124 lm/W	4.000 K



L x W x H (mm):
600 x 600 x 63



L x W x H (mm):
600 x 600 x 71



L x W x H (mm):
625 x 625 x 63




L x W x H (mm):
625 x 625 x 71

Product designation	Colour	Availability*	Prod no.	GBP
PANEL 600 Mounting frame	○	S	1007474	39.00
PANEL 600 Recessed mounting frames	○	S	1007575	56.00
PANEL 625 Mounting frame	○	S	1007475	39.00
PANEL 625 Recessed mounting frames	○	S	1007576	56.00

All mounting frames are also compatible with Panel C and Panel P.

*S = in stock
O = to order

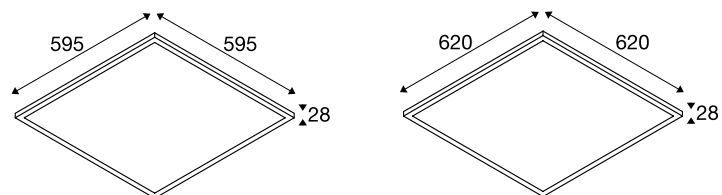


	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
50.000h L80B10	>80	<22	115°	-	-	On / Off	✕	S	1007496	56.00
50.000h L80B10	>80	<19	85°	-	-	On / Off	✕	S	1007498	65.00
50.000h L80B10	>80	<19	85°	-	-	DALI	✓	S	1007504	95.00
50.000h L80B10	>80	<22	115°	-	-	On / Off	✕	S	1007497	56.00
50.000h L80B10	>80	<19	85°	-	-	On / Off	✕	S	1007499	65.00
50.000h L80B10	>80	<19	85°	-	-	DALI	✓	S	1007505	95.00



Ø x L (mm):
1,5 x 1500

Product designation	Colour	Availability*	Prod no.	GBP
PANEL V Safety cable 1500 mm		S	1007577	13.00

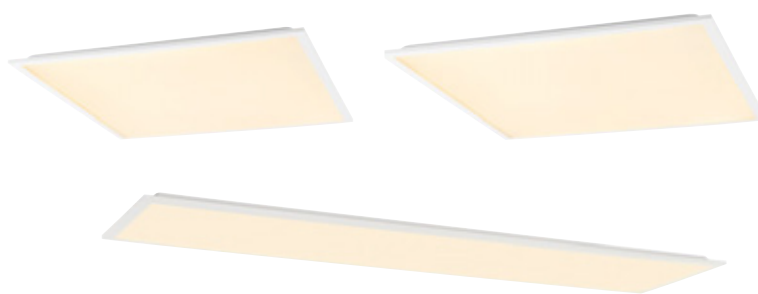

PANEL C






**MULTI
LUMEN**

**MULTI
COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
PANEL C 600 34 W, 830 / 840, UGR	○	34 W	220-240 V	4.550 lm	133 lm/W	3.000 K
				4.650 lm	136 lm/W	4.000 K
PANEL C 600 34 W, 930 / 940, UGR	○	34 W	220-240 V	4.300 lm	126 lm/W	3.000 K
				4.500 lm	132 lm/W	4.000 K
PANEL C DALI 600 34 W, 830 / 840, UGR	○	34 W	220-240 V	4.550 lm	133 lm/W	3.000 K
				4.650 lm	136 lm/W	4.000 K
PANEL C 600 DALI 34 W, 930 / 940, UGR	○	34 W	220-240 V	4.300 lm	126 lm/W	3.000 K
				4.500 lm	132 lm/W	4.000 K
PANEL C 625 34 W, 830 / 840, UGR	○	34 W	220-240 V	4.550 lm	133 lm/W	3.000 K
				4.650 lm	136 lm/W	4.000 K
PANEL C 625 34 W, 930 / 940, UGR	○	34 W	220-240 V	4.300 lm	126 lm/W	3.000 K
				4.500 lm	132 lm/W	4.000 K
PANEL C DALI 625 34 W, 830 / 840, UGR	○	34 W	220-240 V	4.550 lm	133 lm/W	3.000 K
				4.650 lm	136 lm/W	4.000 K
PANEL C 625 DALI 34 W, 930 / 940, UGR	○	34 W	220-240 V	4.300 lm	126 lm/W	3.000 K
				4.500 lm	132 lm/W	4.000 K
PANEL C 1200 34 W, 830 / 840, UGR	○	34 W	220-240 V	4.550 lm	133 lm/W	3.000 K
				4.650 lm	129 lm/W	4.000 K
PANEL C 1200 34 W, 930 / 940, UGR	○	34 W	220-240 V	4.200 lm	123 lm/W	3.000 K
				4.400 lm	129 lm/W	4.000 K
PANEL C 1200 DALI 34 W, 830 / 840, UGR	○	34 W	220-240 V	4.550 lm	133 lm/W	3.000 K
				4.650 lm	129 lm/W	4.000 K
PANEL C 1200 DALI 34 W, 930 / 940, UGR	○	34 W	220-240 V	4.200 lm	123 lm/W	3.000 K
				4.400 lm	129 lm/W	4.000 K

The matching mounting frames can be found on page 28.



	CRI	UGR				Emergency lighting	Control	Availability*	Prod no.	GBP
70.000h L80B10	>80	<19	90°	-	-	✗	On / Off	S	1008597	98.00
70.000h L80B10	>90	<19	90°	-	-	✗	On / Off	S	1008599	97.00
70.000h L80B10	>80	<19	90°	-	-	✓	DALI	S	1008601	120.00
70.000h L80B10	>90	<19	90°	-	-	✓	DALI	S	1008603	119.00
70.000h L80B10	>80	<19	90°	-	-	✗	On / Off	S	1008598	98.00
70.000h L80B10	>90	<19	90°	-	-	✗	On / Off	S	1008600	97.00
70.000h L80B10	>80	<19	90°	-	-	✓	DALI	S	1008602	120.00
70.000h L80B10	>90	<19	90°	-	-	✓	DALI	S	1008604	119.00
70.000h L80B10	>80	<19	90°	-	-	✗	On / Off	S	1008605	98.00
70.000h L80B10	>90	<19	90°	-	-	✗	On / Off	S	1008606	97.00
70.000h L80B10	>80	<19	90°	-	-	✓	DALI	S	1008607	120.00
70.000h L80B10	>90	<19	90°	-	-	✓	DALI	S	1008608	119.00



Ø x L (mm):
1,5 x 1500



L x W x H (cm):
4 x 3,5 x 3,2

Product designation	Colour	Availability*	Prod no.	GBP
PANEL C Suspension cable 1500 mm		S	1008609	17.00
PANEL C Mounting spring 4 pieces		S	1008610	13.00



PANEL P




**MULTI
LUMEN**



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
PANEL P 595 45 840 WB UGR19 ML WH	○	42 W	220-240 V	6.900 lm	203 lm/W	4.000 K
PANEL P 595 45 830 WB UGR19 ML WH	○	42 W	220-240 V	6.500 lm	203 lm/W	3.000 K
PANEL P 595 45 840 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.900 lm	200 lm/W	4.000 K
PANEL P 595 45 830 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.500 lm	200 lm/W	3.000 K
PANEL P 625 45 840 WB UGR19 ML WH	○	42 W	220-240 V	6.900 lm	203 lm/W	4.000 K
PANEL P 625 45 830 WB UGR19 ML WH	○	42 W	220-240 V	6.500 lm	203 lm/W	3.000 K
PANEL P 625 45 840 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.900 lm	200 lm/W	4.000 K
PANEL P 625 45 830 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.500 lm	200 lm/W	3.000 K
PANEL P 1200/300 45 840 WB UGR19 ML WH	○	42 W	220-240 V	6.700 lm	190 lm/W	4.000 K
PANEL P 1200/300 45 830 WB UGR19 ML WH	○	42 W	220-240 V	6.400 lm	190 lm/W	3.000 K
PANEL P 1200/300 45 840 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.700 lm	200 lm/W	4.000 K
PANEL P 1200/300 45 830 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.400 lm	200 lm/W	3.000 K
PANEL P 1200/600 60 840 WB UGR19 ML WH	○	42 W	220-240 V	7.000 lm	203 lm/W	4.000 K
PANEL P 1200/600 60 830 WB UGR19 ML WH	○	42 W	220-240 V	6.700 lm	203 lm/W	3.000 K
PANEL P 1200/600 60 840 WB UGR19 ML DALI WH	○	42 W	220-240 V	7.000 lm	203 lm/W	4.000 K
PANEL P 1200/600 60 830 WB UGR19 ML DALI WH	○	42 W	220-240 V	6.700 lm	203 lm/W	3.000 K

The matching mounting frames can be found on page 28.




*S = in stock
O = to order

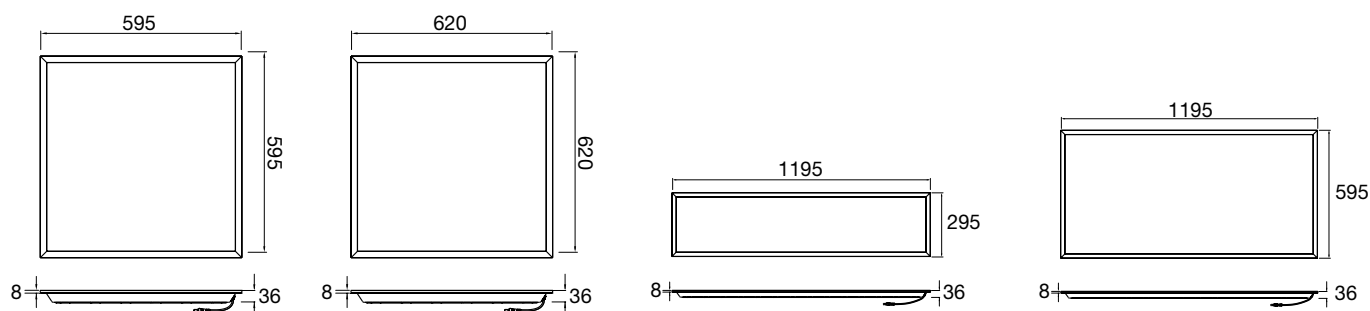

		CRI	UGR				Emergency lighting	Control	Availability*	Prod no.	GBP
	100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	S	1010747	111.00
	100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	S	1010748	111.00
	100.000h L80B50	>80	<19	110°	-	-	✓	DALI	S	1010749	128.00
	100.000h L80B50	>80	<19	110°	-	-	✓	DALI	S	1010750	128.00
	100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	S	1010109	111.00
	100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	O	1010110	111.00
	100.000h L80B50	>80	<19	110°	-	-	✓	DALI	S	1010111	128.00
	100.000h L80B50	>80	<19	110°	-	-	✓	DALI	O	1010112	128.00
	100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	S	1010113	119.00
	100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	O	1010114	119.00
	100.000h L80B50	>80	<19	110°	-	-	✓	DALI	S	1010115	136.00
	100.000h L80B50	>80	<19	110°	-	-	✓	DALI	O	1010116	136.00
	100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	O	1010117	145.00
	100.000h L80B50	>80	<19	110°	-	-	✓	On / Off	O	1010118	145.00
	100.000h L80B50	>80	<19	110°	-	-	✓	DALI	O	1010119	170.00
	100.000h L80B50	>80	<19	110°	-	-	✓	DALI	O	1010120	170.00

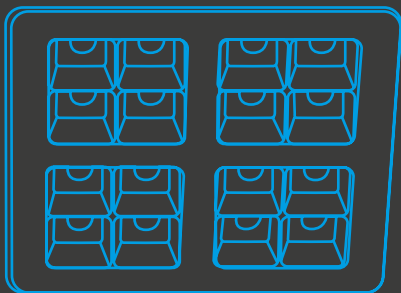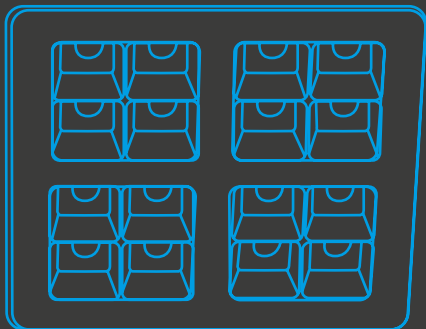

Multi-Colour:
3.000 K / 4.000 K / 5.000 K



PAVANNO

PRODUCT ADVANTAGES

High energy savings thanks to an **Efficiency of up to 190 lm/W**

Can be used as **office lighting** thanks to **UGR<19**

Service life up to **100,000 hours**



EASY TO INSTALL thanks to integrated through-wiring and external ballast

Flexibly adjustable thanks to **Multi-Lumen** and **Multi-Colour**

All DALI variants support **DC operation**

Service life
100,000
hours

**MULTI
LUMEN** **MULTI
COLOR**

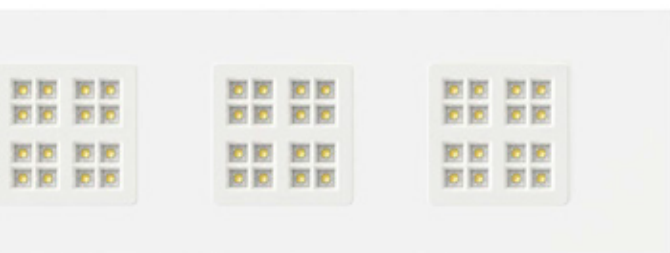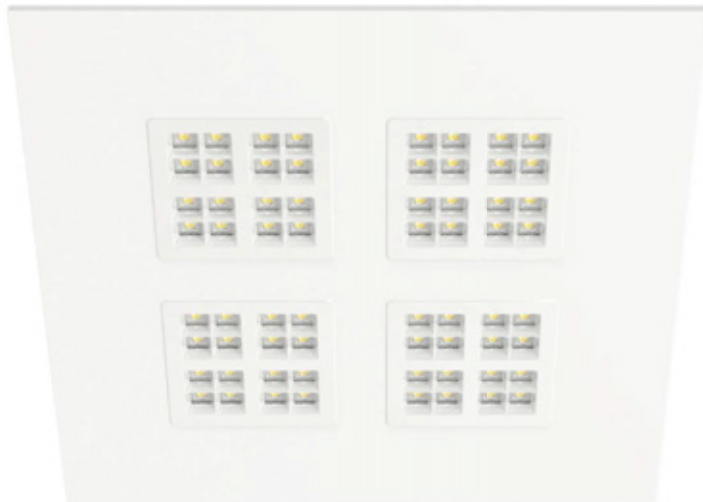

PAVANNO

INDOOR



PAVANNO



IP20



IK02




**MULTI
LUMEN**

**MULTI
COLOR**




Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
PAVANNO 600 45 830/840/850 WB WH UGR19	○	39 W	220-240 V	6.600 lm	180 lm/W	3.000 K
				6.900 lm	190 lm/W	4.000 K
				6.900 lm	190 lm/W	5.000 K
PAVANNO 600 45 830/840/850 WB WH UGR19 DALI	○	38 W	220-240 V	6.300 lm	175 lm/W	3.000 K
				6.800 lm	185 lm/W	4.000 K
				6.800 lm	185 lm/W	5.000 K
PAVANNO 600 45 830/840/850 WB BK, UGR19	●	39 W	220-240 V	6.200 lm	170 lm/W	3.000 K
				6.600 lm	180 lm/W	4.000 K
				6.600 lm	180 lm/W	5.000 K
PAVANNO 600 45 830/840/850 WB BK, UGR19 DALI	●	38 W	220-240 V	6.000 lm	160 lm/W	3.000 K
				6.400 lm	170 lm/W	4.000 K
				6.400 lm	170 lm/W	5.000 K
PAVANNO 625 45 830/840/850 WB WH UGR19	○	39 W	220-240 V	6.600 lm	180 lm/W	3.000 K
				6.900 lm	190 lm/W	4.000 K
				6.900 lm	190 lm/W	5.000 K
PAVANNO 625 45 830/840/850 WB WH UGR19 DALI	○	38 W	220-240 V	6.300 lm	175 lm/W	3.000 K
				6.800 lm	185 lm/W	4.000 K
				6.800 lm	185 lm/W	5.000 K
PAVANNO 1200/300 45 830/840/850 WB WH UGR19	○	39 W	220-240 V	6.600 lm	180 lm/W	3.000 K
				6.900 lm	190 lm/W	4.000 K
				6.900 lm	190 lm/W	5.000 K
PAVANNO 1200/300 45 830/840/850 WB WH UGR19 DALI	○	38 W	220-240 V	6.300 lm	175 lm/W	3.000 K
				6.800 lm	185 lm/W	4.000 K
				6.800 lm	185 lm/W	5.000 K

Other sizes are available on request.

*S = in stock
O = to order

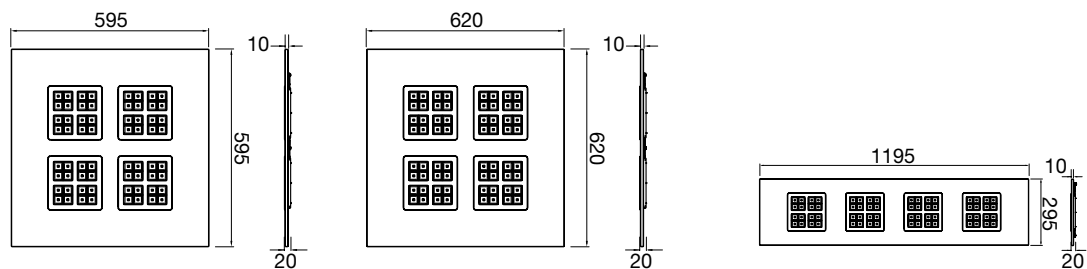

	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
100.000h L80B10	>80	19	80°	-	-	On / Off	✓	S	1010713	166.00
100.000h L80B10	>80	19	80°	-	-	DALI	✓	S	1010714	170.00
100.000h L80B10	>80	19	80°	-	-	On / Off	✓	S	1010716	166.00
100.000h L80B10	>80	19	80°	-	-	DALI	✓	S	1010715	170.00
100.000h L80B10	>80	19	80°	-	-	On / Off	✓	S	1010121	158.00
100.000h L80B10	>80	19	80°	-	-	DALI	✓	S	1010122	170.00
100.000h L80B10	>80	19	80°	-	-	On / Off	✓	S	1010123	200.00
100.000h L80B10	>80	19	80°	-	-	DALI	✓	S	1010124	213.00

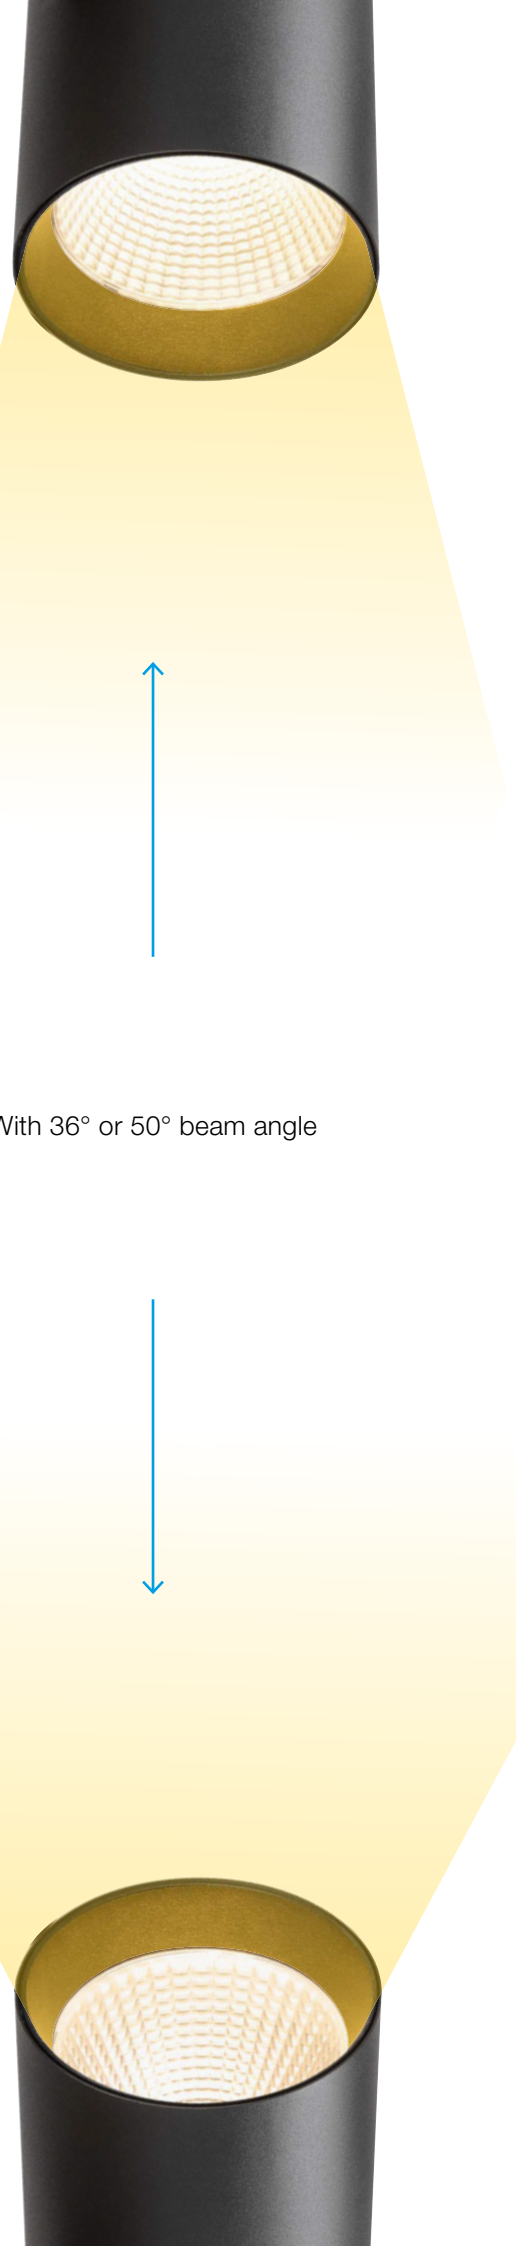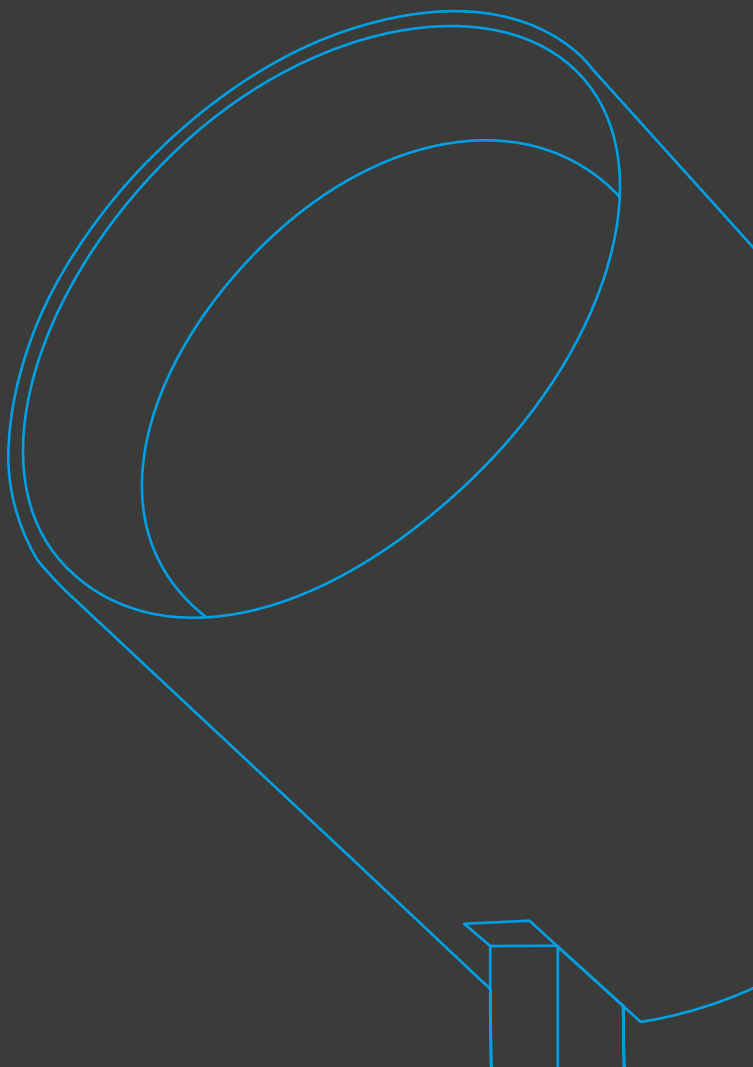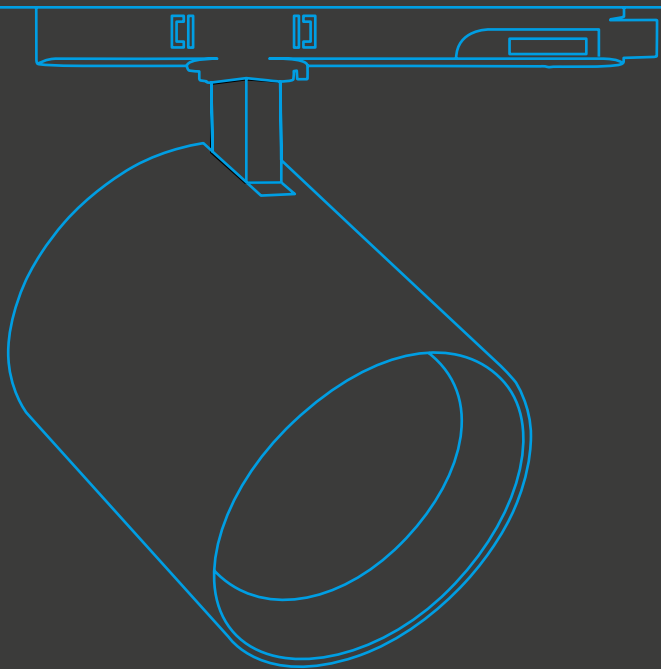

With 36° or 50° beam angle



TRACKSPOT

PRODUCT ADVANTAGES

54 Product variants - for maximum flexibility and customised use

Outstanding light quality thanks to **CRI>90**

Simple and timeless design



PRODUCT VARIANTS

	TRACKSPOT V	TRACKSPOT C	TRACKSPOT P
Service life	50.000h L70B50	50.000h L70B50	75.000h L80B10
Energy efficiency	up to 130 lm/W	up to 152 lm/W	up to 170 lm/W
CRI	>90	>90	>90
Control	On / Off	On / Off	On / Off

TRACKSPOT

INDOOR



TRACKSPOT V




IP20



IK02

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
TRACKSPOT V 3-ph, 18 W, 930, 36°, white	○	18 W	220-240 V	2.250 lm	125 lm/W	3.000 K
TRACKSPOT V 3-ph, 18 W, 930, 36°, black	●	18 W	220-240 V	2.250 lm	125 lm/W	3.000 K
TRACKSPOT V 3-ph, 18 W, 930, 50°, white	○	18 W	220-240 V	2.250 lm	125 lm/W	3.000 K
TRACKSPOT V 3-ph, 18 W, 930, 50°, black	●	18 W	220-240 V	2.250 lm	125 lm/W	3.000 K
TRACKSPOT V 3-ph, 18 W, 940, 36°, white	○	18 W	220-240 V	2.350 lm	130 lm/W	4.000 K
TRACKSPOT V 3-ph, 18 W, 940, 36°, black	●	18 W	220-240 V	2.350 lm	130 lm/W	4.000 K
TRACKSPOT V 3-ph, 18 W, 940, 50°, white	○	18 W	220-240 V	2.350 lm	130 lm/W	4.000 K
TRACKSPOT V 3-ph, 18 W, 940, 50°, black	●	18 W	220-240 V	2.350 lm	130 lm/W	4.000 K
TRACKSPOT V 3-ph, 32 W, 930, 36°, white	○	32 W	220-240 V	3.700 lm	115 lm/W	3.000 K
TRACKSPOT V 3-ph, 32 W, 930, 36°, black	●	32 W	220-240 V	3.700 lm	115 lm/W	3.000 K
TRACKSPOT V 3-ph, 32 W, 930, 50°, white	○	32 W	220-240 V	3.700 lm	115 lm/W	3.000 K
TRACKSPOT V 3-ph, 32 W, 930, 50°, black	●	32 W	220-240 V	3.700 lm	115 lm/W	3.000 K
TRACKSPOT V 3-ph, 32 W, 940, 36°, white	○	32 W	220-240 V	3.900 lm	121 lm/W	4.000 K
TRACKSPOT V 3-ph, 32 W, 940, 36°, black	●	32 W	220-240 V	3.900 lm	121 lm/W	4.000 K
TRACKSPOT V 3-ph, 32 W, 940, 50°, white	○	32 W	220-240 V	3.900 lm	121 lm/W	4.000 K
TRACKSPOT V 3-ph, 32 W, 940, 50°, black	●	32 W	220-240 V	3.900 lm	121 lm/W	4.000 K

*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008844	77.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008845	77.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008846	77.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008847	77.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008848	77.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008849	77.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008850	77.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008851	77.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008852	94.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008853	94.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008854	94.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008855	94.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008856	94.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008857	94.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008858	94.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008859	94.00

You can find the matching 3-phase tracks at slv.com and in the current BIG WHITE®



INDOOR




TRACKSPOT C



Product designation	Colour	Max. total wattage	Mains voltage	Max. flux	Efficiency	Colour temperature
TRACKSPOT C 3-ph, 17 W, 930, 36°, white	○	17 W	220-240 V	2.450 lm	144 lm/W	3.000 K
TRACKSPOT C 3-ph, 17 W, 930, 36°, black	●	17 W	220-240 V	2.450 lm	144 lm/W	3.000 K
TRACKSPOT C 3-ph, 17 W, 930, 50°, white	○	17 W	220-240 V	2.450 lm	144 lm/W	3.000 K
TRACKSPOT C 3-ph, 17 W, 930, 50°, black	●	17 W	220-240 V	2.450 lm	144 lm/W	3.000 K
TRACKSPOT C 3-ph, 17 W, 940, 36°, white	○	17 W	220-240 V	2.600 lm	152 lm/W	4.000 K
TRACKSPOT C 3-ph, 17 W, 940, 36°, black	●	17 W	220-240 V	2.600 lm	152 lm/W	4.000 K
TRACKSPOT C 3-ph, 17 W, 940, 50°, white	○	17 W	220-240 V	2.600 lm	152 lm/W	4.000 K
TRACKSPOT C 3-ph, 17 W, 940, 50°, black	●	17 W	220-240 V	2.600 lm	152 lm/W	4.000 K
TRACKSPOT C 3-ph, 29 W, 930, 36°, white	○	29 W	220-240 V	4.050 lm	139 lm/W	3.000 K
TRACKSPOT C 3-ph, 29 W, 930, 36°, black	●	29 W	220-240 V	4.050 lm	139 lm/W	3.000 K
TRACKSPOT C 3-ph, 29 W, 930, 50°, white	○	29 W	220-240 V	4.050 lm	139 lm/W	3.000 K
TRACKSPOT C 3-ph, 29 W, 930, 50°, black	●	29 W	220-240 V	4.050 lm	139 lm/W	3.000 K
TRACKSPOT C 3-ph, 29 W, 940, 36°, white	○	29 W	220-240 V	4.200 lm	144 lm/W	4.000 K
TRACKSPOT C 3-ph, 29 W, 940, 36°, black	●	29 W	220-240 V	4.200 lm	144 lm/W	4.000 K
TRACKSPOT C 3-ph, 29 W, 940, 50°, white	○	29 W	220-240 V	4.200 lm	144 lm/W	4.000 K
TRACKSPOT C 3-ph, 29 W, 940, 50°, black	●	29 W	220-240 V	4.200 lm	144 lm/W	4.000 K

*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008860	85.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008861	85.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008862	85.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008863	85.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008864	85.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008865	85.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008866	85.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008867	85.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008868	102.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008869	102.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008870	102.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008871	102.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008872	102.00
50.000h L70B50	>90	-	36°	-	90°	On / Off	✓	S	1008873	102.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008874	102.00
50.000h L70B50	>90	-	50°	-	90°	On / Off	✓	S	1008875	102.00

You can find the matching 3-phase tracks at slv.com and in the current BIG WHITE®



TRACKSPOT

INDOOR




TRACKSPOT P



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
TRACKSPOT P 3PH. 33 930 MB ML BK	●	28 W	220-240 V	4.360 lm	170 lm/W	3.000 K
TRACKSPOT P 3PH. 33 930 MB ML WH	○	28 W	220-240 V	4.360 lm	170 lm/W	3.000 K
TRACKSPOT P 3PH. 34 940 MB ML BK	●	28 W	220-240 V	4.450 lm	170 lm/W	4.000 K
TRACKSPOT P 3PH. 34 940 MB ML WH	○	28 W	220-240 V	4.450 lm	170 lm/W	4.000 K
TRACKSPOT P 3PH. 33 930 WB ML BK	●	28 W	220-240 V	4.330 lm	170 lm/W	3.000 K
TRACKSPOT P 3PH. 33 930 WB ML WH	○	28 W	220-240 V	4.330 lm	170 lm/W	3.000 K
TRACKSPOT P 3PH. 34 940 WB ML BK	●	28 W	220-240 V	4.390 lm	170 lm/W	4.000 K
TRACKSPOT P 3PH. 34 940 WB ML WH	○	28 W	220-240 V	4.390 lm	170 lm/W	4.000 K
TRACKSPOT P 3PH. 34 930 VWB ML BK	●	28 W	220-240 V	4.450 lm	170 lm/W	3.000 K
TRACKSPOT P 3PH. 34 930 VWB ML WH	○	28 W	220-240 V	4.450 lm	170 lm/W	3.000 K
TRACKSPOT P 3PH. 34 940 VWB ML BK	●	28 W	220-240 V	4.540 lm	170 lm/W	4.000 K
TRACKSPOT P 3PH. 34 940 VWB ML WH	○	28 W	220-240 V	4.540 lm	170 lm/W	4.000 K

*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	S	1010591	128.00
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	O	1010592	128.00
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	S	1010593	128.00
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	S	1010594	128.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	O	1010599	128.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	S	1010600	128.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	O	1010601	128.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	S	1010602	128.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	S	1010607	128.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	O	1010608	128.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	S	1010609	128.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	O	1010610	128.00

You can find the matching 3-phase tracks at slv.com and in the current BIG WHITE®



TRACKSPOT

INDOOR




TRACKSPOT P



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
TRACKSPOT P 3PH. 56 930 MB ML BK	●	35 W	220-240 V	5.640 lm	164 lm/W	3.000 K
TRACKSPOT P 3PH. 56 930 MB ML WH	○	35 W	220-240 V	5.640 lm	164 lm/W	3.000 K
TRACKSPOT P 3PH. 57 940 MB ML BK	●	35 W	220-240 V	5.750 lm	164 lm/W	4.000 K
TRACKSPOT P 3PH. 57 940 MB ML WH	○	35 W	220-240 V	5.750 lm	164 lm/W	4.000 K
TRACKSPOT P 3PH. 56 930 WB ML BK	●	35 W	220-240 V	5.630 lm	164 lm/W	3.000 K
TRACKSPOT P 3PH. 56 930 WB ML WH	○	35 W	220-240 V	5.630 lm	164 lm/W	3.000 K
TRACKSPOT P 3PH. 56 940 WB ML BK	●	35 W	220-240 V	5.670 lm	164 lm/W	4.000 K
TRACKSPOT P 3PH. 57 940 WB ML WH	○	35 W	220-240 V	5.670 lm	164 lm/W	4.000 K
TRACKSPOT P 3PH. 57 930 VWB ML BK	●	35 W	220-240 V	5.750 lm	164 lm/W	3.000 K
TRACKSPOT P 3PH. 57 930 VWB ML WH	○	35 W	220-240 V	5.750 lm	164 lm/W	3.000 K
TRACKSPOT P 3PH. 58 940 VWB ML BK	●	35 W	220-240 V	5.870 lm	164 lm/W	4.000 K
TRACKSPOT P 3PH. 58 940 VWB ML WH	○	35 W	220-240 V	5.870 lm	164 lm/W	4.000 K


*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	S	1010595	128.00
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	S	1010596	128.00
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	O	1010597	128.00
75.000h L80B10	>90	<25	36°	-	90°	On / Off	✓	S	1010598	128.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	O	1010603	128.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	S	1010604	128.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	S	1010605	128.00
75.000h L80B10	>90	<25	47°	-	90°	On / Off	✓	O	1010606	128.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	O	1010611	128.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	O	1010612	128.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	O	1010613	128.00
75.000h L80B10	>90	<25	60°	-	90°	On / Off	✓	O	1010614	128.00

You can find the matching 3-phase tracks at slv.com and in the current BIG WHITE®



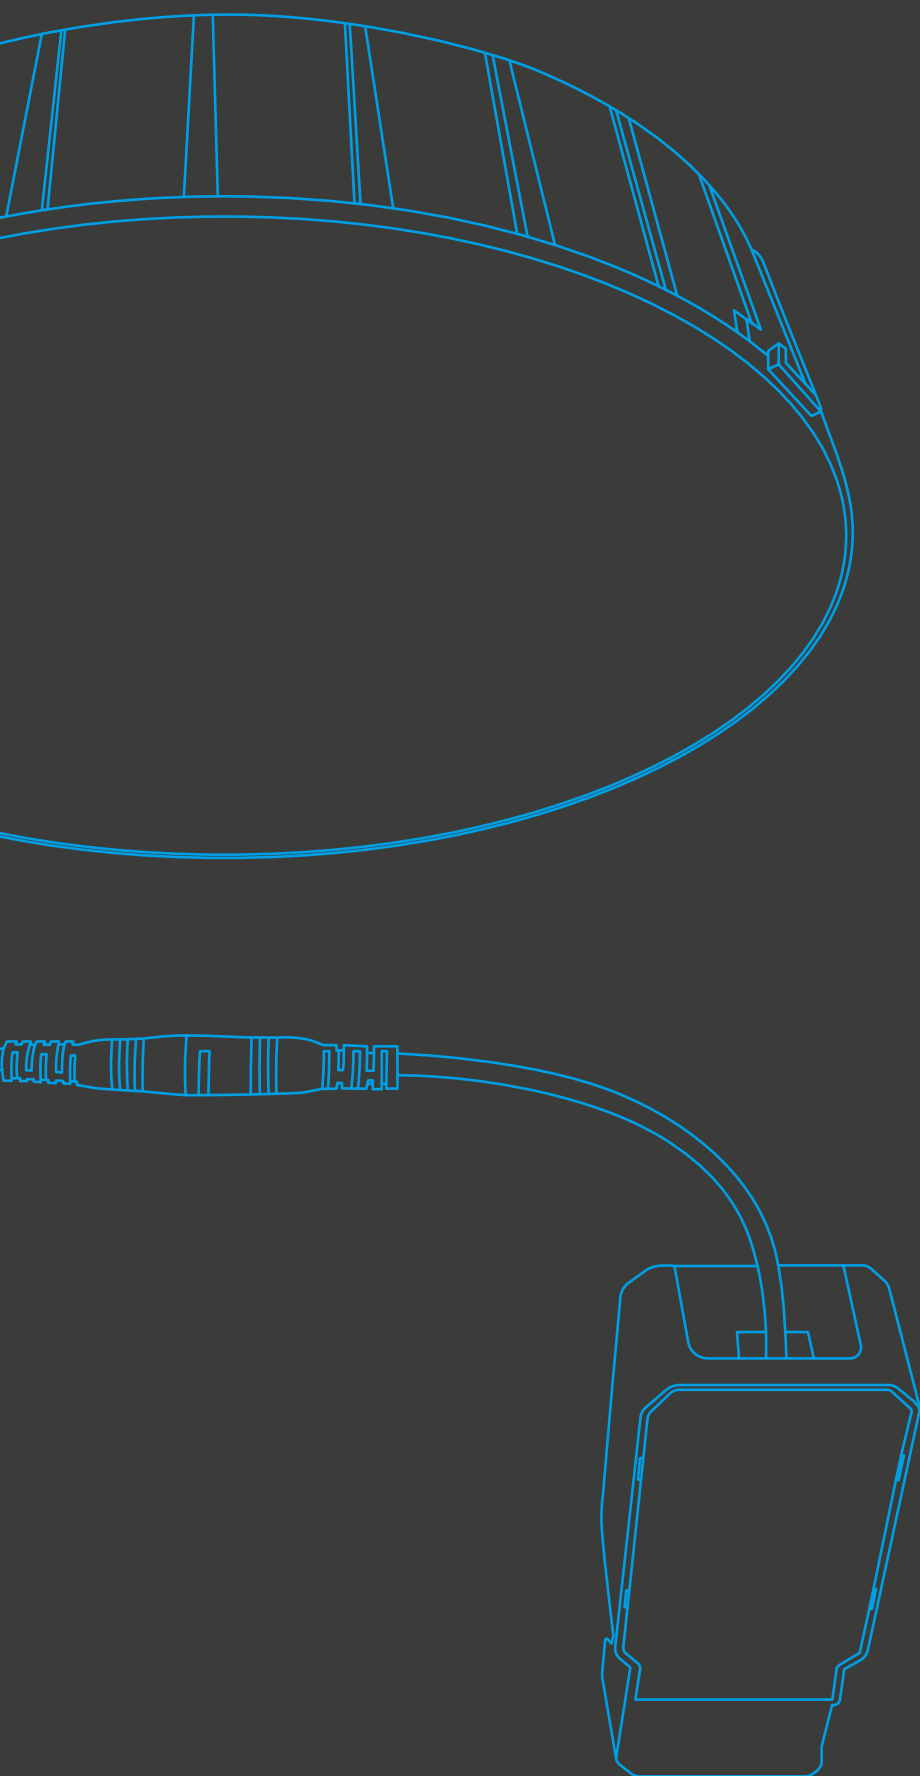

COMBINE



DOWNLIGHT V
100 / 150 / 200



Flat or recessed bezels in three
sizes and two colours each



When purchasing a DOWNLIGHT the mounting
frame is not included as standard.

DOWNLIGHT

PRODUCT ADVANTAGES

Easy change between the slightly recessed and flat bezels thanks to the bayonet lock on DOWNLIGHT V

EASY TO INSTALL due to the LED driver's integrated quick-connect connection box

Less rework on site due to **Common installation diameters**

Flexibly adjustable thanks to **Multi-Lumen** (all versions) and **Multi-Colour** (Downlight V)

**MULTI
LUMEN** **MULTI
COLOR**



PRODUCT VARIANTS

	DOWNLIGHT V	DOWNLIGHT C	DOWNLIGHT P
Service life	50.000h L70B50	70.000h L80B10	80.000h L80B10
Energy efficiency	up to 126 lm/W	up to 129 lm/W	up to 170 lm/W
UGR	>28	22	21 / 23
Control	On / Off	On / Off, DALI	On / Off, DALI

DOWNLIGHT

INDOOR



DOWNLIGHT V






MULTI
LUMEN

MULTI
COLOR

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
DOWNLIGHT V 100 830 / 840, 6 W, IP54	●	6 W	220-240 V	610 lm	101 lm/W	3.000 K
				640 lm	106 lm/W	4.000 K
DOWNLIGHT V 150 830 / 840, 9 / 15 W, IP54	●	15 W	220-240 V	1.750 lm	116 lm/W	3.000 K
				1.900 lm	126 lm/W	4.000 K
DOWNLIGHT V 200 830 / 840, 15 / 21 W, IP54	●	21 W	220-240 V	2.360 lm	112 lm/W	3.000 K
				2.490 lm	118 lm/W	4.000 K

*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
50.000h L70B50	>80	>28	105°	-	-	On / Off	✕	S	1007508	39.00
50.000h L70B50	>80	>28	105°	-	-	On / Off	✕	S	1007509	46.00
50.000h L70B50	>80	>28	105°	-	-	On / Off	✕	S	1007510	52.00



Product designation	Colour	Availability*	Prod no.	GBP
DOWNLIGHT V 100 black flat bezel	●	S	1007477	5.00
DOWNLIGHT V 100 white flat bezel	○	S	1007476	5.00
DOWNLIGHT V 100 recessed bezel black	●	S	1007479	5.00
DOWNLIGHT V 100 recessed bezel white	○	S	1007478	5.00
DOWNLIGHT V 150 black flat bezel	●	S	1007481	7.00
DOWNLIGHT V 150 white flat bezel	○	S	1007480	7.00
DOWNLIGHT V 150 recessed bezel black	●	S	1007483	7.00
DOWNLIGHT V 150 recessed bezel white	○	S	1007482	7.00
DOWNLIGHT V 200 black flat bezel	●	S	1007485	9.00
DOWNLIGHT V 200 white flat bezel	○	S	1007484	9.00
DOWNLIGHT V 200 recessed bezel black	●	S	1007487	9.00
DOWNLIGHT V 200 recessed bezel white	○	S	1007486	9.00

DOWNLIGHT

INDOOR




DOWNLIGHT C



**MULTI
LUMEN**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
DOWNLIGHT C 150 8 / 14 / 20 W, 930	○	20 W	220-240 V	2.250 lm	112 lm/W	3.000 K
DOWNLIGHT C 150 8 / 14 / 20 W, 940	○	20 W	220-240 V	2.400 lm	120 lm/W	4.000 K
DOWNLIGHT C 200 8 / 16 / 24 W, 930	○	24 W	220-240 V	2.850 lm	118 lm/W	3.000 K
DOWNLIGHT C 200 8 / 16 / 24 W, 940	○	24 W	220-240 V	3.100 lm	129 lm/W	4.000 K
DOWNLIGHT C dali 150 20 W, 930	○	20 W	220-240 V	2.250 lm	112 lm/W	3.000 K
DOWNLIGHT C DALI 150 20 W, 940	○	20 W	220-240 V	2.400 lm	120 lm/W	4.000 K
DOWNLIGHT C DALI 200 24 W, 930	○	24 W	220-240 V	2.850 lm	118 lm/W	3.000 K
DOWNLIGHT C DALI 200 24 W, 940	○	24 W	220-240 V	3.100 lm	129 lm/W	4.000 K

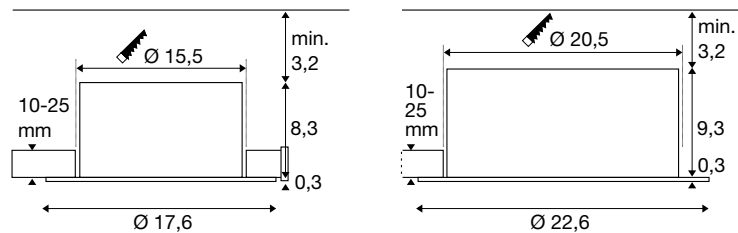

	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
70.000h L80B10	>90	22	55°	-	-	On / Off	×	S	1008621	77.00
70.000h L80B10	>90	22	55°	-	-	On / Off	×	S	1008622	77.00
70.000h L80B10	>90	22	55°	-	-	On / Off	×	S	1008623	93.00
70.000h L80B10	>90	22	55°	-	-	On / Off	×	S	1008624	93.00
70.000h L80B10	>90	22	55°	-	-	DALI	×	S	1008625	111.00
70.000h L80B10	>90	22	55°	-	-	DALI	×	S	1008626	111.00
70.000h L80B10	>90	22	55°	-	-	DALI	×	S	1008627	128.00
70.000h L80B10	>90	22	55°	-	-	DALI	×	S	1008628	128.00

DOWNLIGHT





INDOOR




DOWNLIGHT P

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
DOWNLIGHT P 12 HG 840 60 ML DALI WH	○	8 W	220-240 V	1.200 lm	150 lm/W	4.000 K
DOWNLIGHT P 12 HG 840 60 ML WH	○	8 W	220-240 V	1.200 lm	150 lm/W	4.000 K
DOWNLIGHT P 12 WM 840 60 ML WH	○	8 W	220-240 V	1.200 lm	150 lm/W	4.000 K
DOWNLIGHT P 12 WM 840 60 ML DALI WH	○	8 W	220-240 V	1.200 lm	150 lm/W	4.000 K
DOWNLIGHT P 18 HG 840 60 ML DALI WH	○	15 W	220-240 V	1.800 lm	150 lm/W	4.000 K
DOWNLIGHT P 18 HG 840 60 ML WH	○	15 W	220-240 V	1.800 lm	150 lm/W	4.000 K
DOWNLIGHT P 18 WM 840 60 ML WH	○	15 W	220-240 V	1.800 lm	150 lm/W	4.000 K
DOWNLIGHT P 18 WM 840 60 ML DALI WH	○	15 W	220-240 V	1.800 lm	150 lm/W	4.000 K
DOWNLIGHT P 30 HG 840 60 ML WH	○	21 W	220-240 V	3.060 lm	170 lm/W	4.000 K
DOWNLIGHT P 30 HG 840 60 ML DALI WH	○	21 W	220-240 V	3.060 lm	170 lm/W	4.000 K
DOWNLIGHT P 30 WM 840 60 ML DALI WH	○	21 W	220-240 V	3.060 lm	170 lm/W	4.000 K
DOWNLIGHT P 30 WM 840 60 ML WH	○	21 W	220-240 V	3.060 lm	170 lm/W	4.000 K
DOWNLIGHT P 40 HG 840 60 ML DALI WH	○	29 W	220-240 V	4.080 lm	170 lm/W	4.000 K
DOWNLIGHT P 40 WM 840 60 ML DALI WH	○	29 W	220-240 V	4.080 lm	170 lm/W	4.000 K
DOWNLIGHT P 40 HG 840 60 ML WH	○	29 W	220-240 V	4.080 lm	170 lm/W	4.000 K
DOWNLIGHT P 40 WM 840 60 ML WH	○	29 W	220-240 V	4.080 lm	170 lm/W	4.000 K

*S = in stock (november 2025)
 O = to order

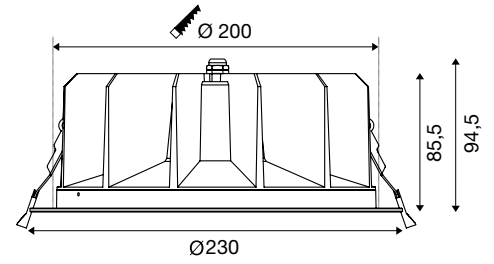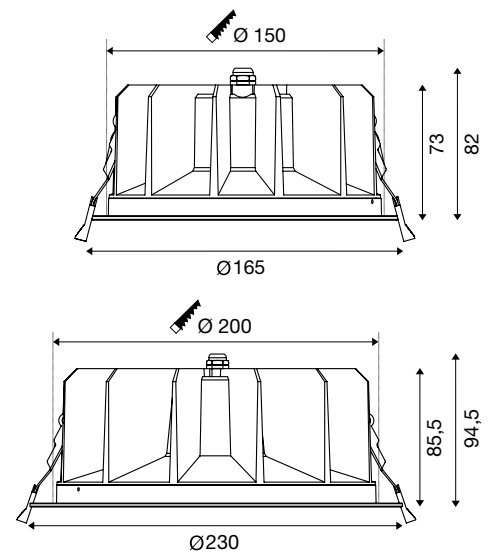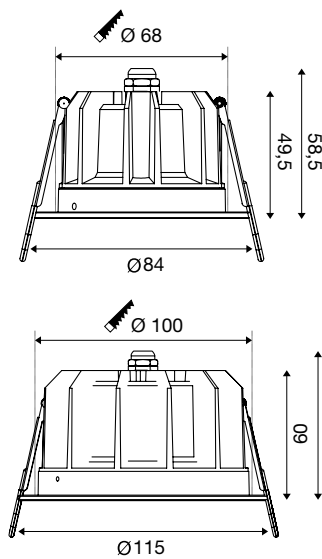

	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
80.000h L80B10	>80	21	60°	-	-	DALI	✓	S	1010755	102.00
80.000h L80B10	>80	21	60°	-	-	On / Off	✓	S	1010756	68.00
80.000h L80B10	>80	21	60°	-	-	On / Off	✓	S	1010757	68.00
80.000h L80B10	>80	21	60°	-	-	DALI	✓	S	1010758	102.00
80.000h L80B10	>80	21	60°	-	-	DALI	✓	S	1010759	128.00
80.000h L80B10	>80	21	60°	-	-	On / Off	✓	S	1010760	102.00
80.000h L80B10	>80	21	60°	-	-	On / Off	✓	S	1010761	102.00
80.000h L80B10	>80	21	60°	-	-	DALI	✓	S	1010762	128.00
80.000h L80B10	>80	23	60°	-	-	On / Off	✓	S	1010763	128.00
80.000h L80B10	>80	23	60°	-	-	DALI	✓	S	1010764	153.00
80.000h L80B10	>80	23	60°	-	-	DALI	✓	S	1010765	153.00
80.000h L80B10	>80	23	60°	-	-	On / Off	✓	S	1010766	128.00
80.000h L80B10	>80	23	60°	-	-	DALI	✓	S	1010767	196.00
80.000h L80B10	>80	23	60°	-	-	DALI	✓	S	1010768	196.00
80.000h L80B10	>80	23	60°	-	-	On / Off	✓	S	1010769	170.00
80.000h L80B10	>80	23	60°	-	-	On / Off	✓	S	1010770	170.00

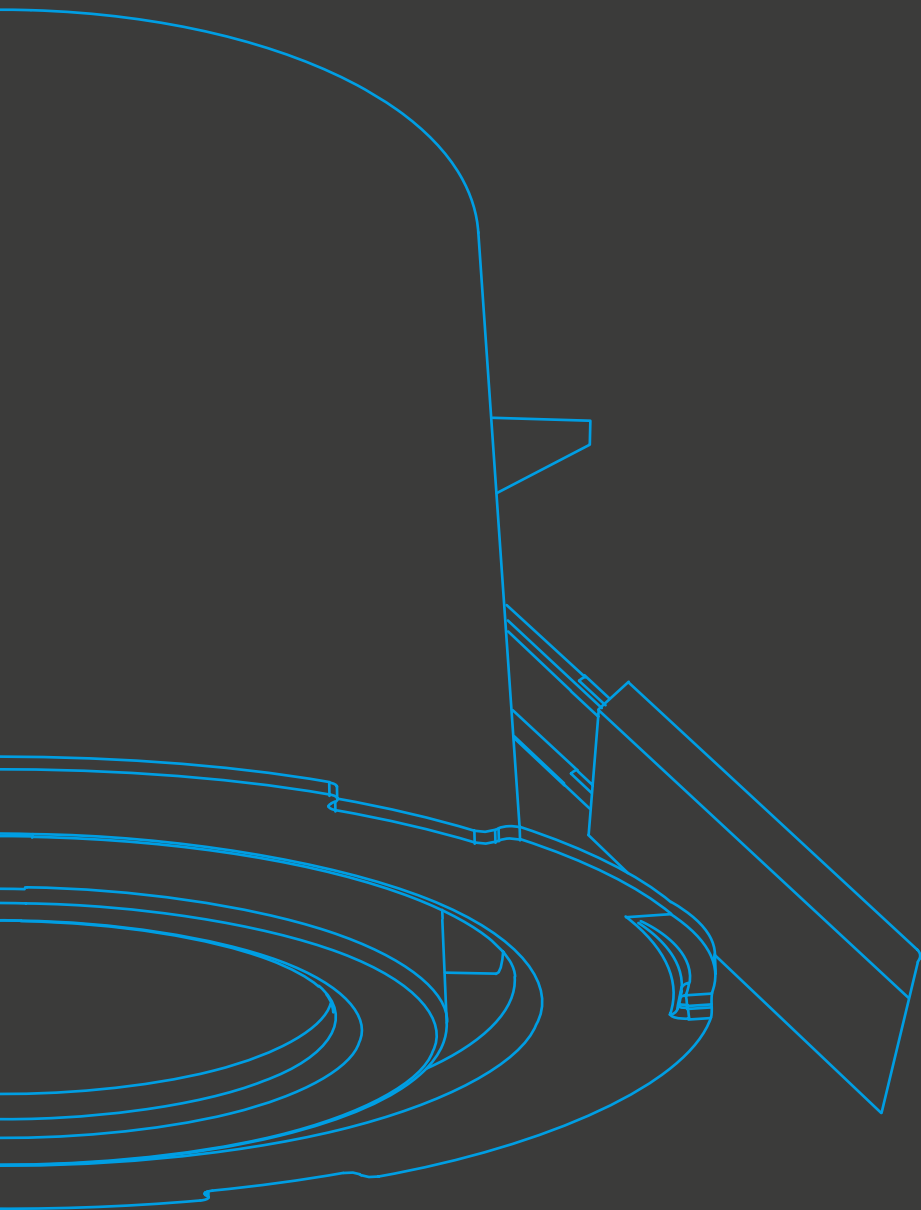

COMBINE



UNIVERSAL
DOWNLIGHT



Bezel in black or white, fixed or
swivelling, round or square



When purchasing a UNIVERSAL DOWNLIGHT
multipack, the bezels are not included as standard.

UNIVERSAL DOWNLIGHT

NEW:
Lockable
springs

PRODUCT ADVANTAGES

Fixed (IP65) and swivelling (IP20) downlight in one product

Flexibly adjustable thanks to **Multi-Colour** 2,700 K / 3,000 K / 4,000 K / 6,500 K and **Multi-Lumen** 5W / 7W

EASY TO INSTALL thanks to the quick-release connection box and lockable springs

Airtight when used with IP65 rigid covers

Can be installed directly into the insulation or covered with insulation.

Tested for use in fire-retardant rated suspended ceilings

**MULTI
LUMEN** **MULTI
COLOR**



UNIVERSAL DOWNLIGHT

INDOOR



UNIVERSAL DOWNLIGHT



IP20



IK02



**MULTI
LUMEN**

**MULTI
COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
UNIVERSAL DOWNLIGHT <i>PHASE Multipack, 12 pieces</i>	●	7 W	220-240 V	670 lm	95 lm/W	2.700 K
				680 lm	97 lm/W	3.000 K
				690 lm	98 lm/W	4.000 K
				680 lm	97 lm/W	6.500 K



L x W x H (mm):

88 x 88 x 35




Ø x L (mm):

88 x 35



Product designation	Colour	Availability*	Prod no.	GBP
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP20, pivoting, square, black</i>	●	S	1007184	4.00
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP20, pivoting, square, white</i>	○	S	1007185	4.00
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP20, pivoting, round, black</i>	●	S	1007091	3.00
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP20, pivoting, round, white</i>	○	S	1007092	3.00
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP65, square, black</i>	●	S	1008096	2.60
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP65, square, white</i>	○	S	1008095	2.60
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP65, round, black</i>	●	S	1008067	2.60
UNIVERSAL DOWNLIGHT Bezel <i>For downlight IP65, round, white</i>	○	S	1008068	2.60

*S = in stock

O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
50.000h L80B50	>90	-	38°	-	30°	Phase	×	S	1008066	249.00

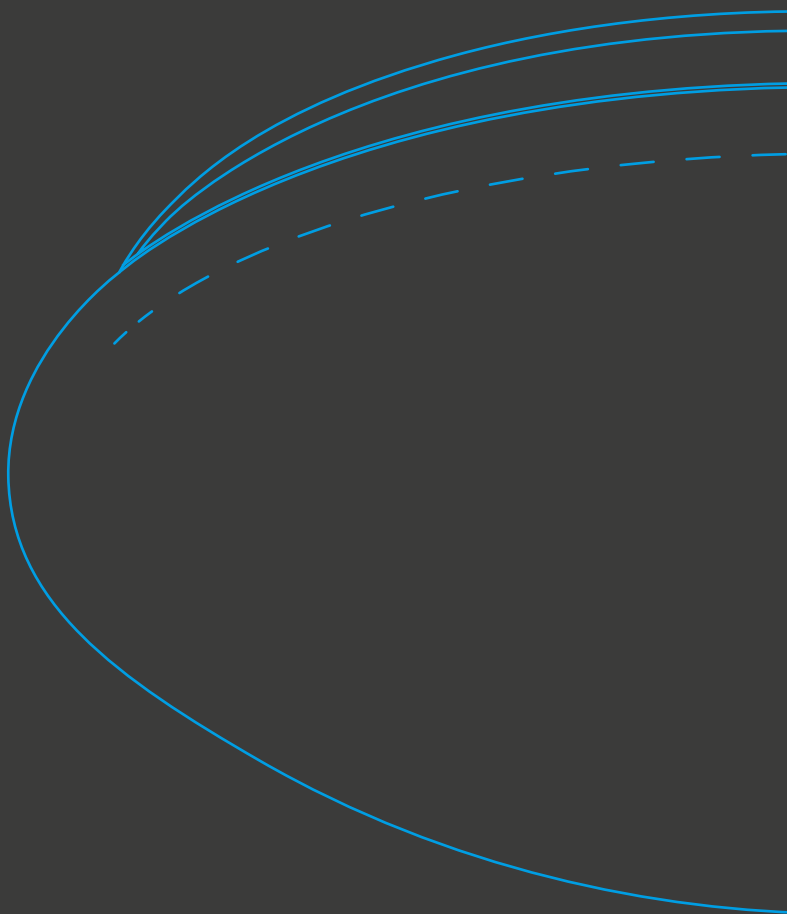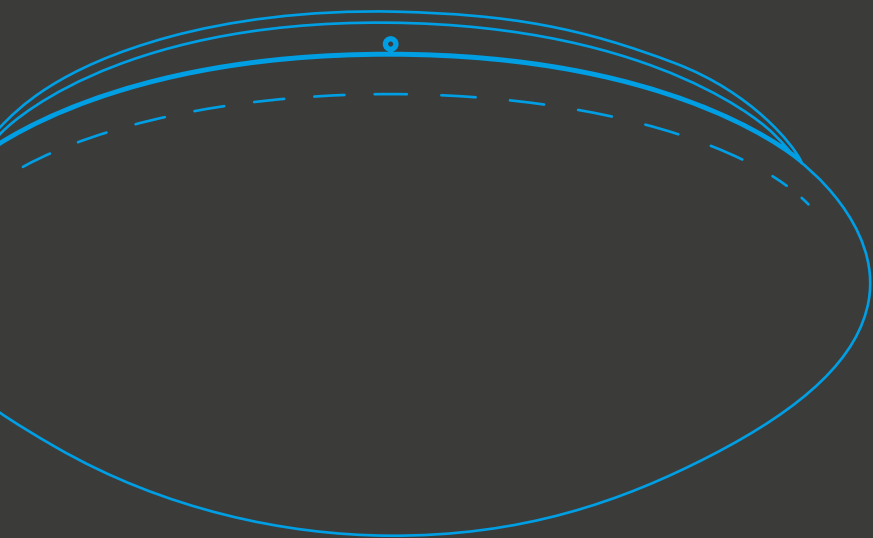

3.000 K

or

4.000 K



SURFACE

PRODUCT ADVANTAGES

Splash-proof and dust-proof light **IP44**

for use in the bathroom, stairwell or cellar

Flexibly adjustable thanks to **Multi-Colour** and **Multi-Lumen**

EASY TO INSTALL thanks to removable cover

Sensor variant for highly energy-efficient use

MULTI
LUMEN

MULTI
COLOR



Variant
with sensor
available



SURFACE

INDOOR



SURFACE V

IP44


IK02

MULTI LUMEN




MULTI COLOR

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
SURFACE V 390 390, 830 / 840, 10 / 15 / 22 W, IP44	○	20 W	220-240 V	1.850 lm	93 lm/W	3.000 K
				2.000 lm	100 lm/W	4.000 K
SURFACE V 390 390, 11 / 16 / 23 W, 830 / 840, Sensor	○	20 W	220-240 V	1.850 lm	93 lm/W	3.000 K
				2.000 lm	100 lm/W	4.000 K


*S = in stock
O = to order



	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
50.000h L80B10	>80	-	120°	-	-	On / Off	×	S	1007516	43.00
50.000h L80B10	>80	-	120°	-	-	On / Off	×	S	1007517	56.00

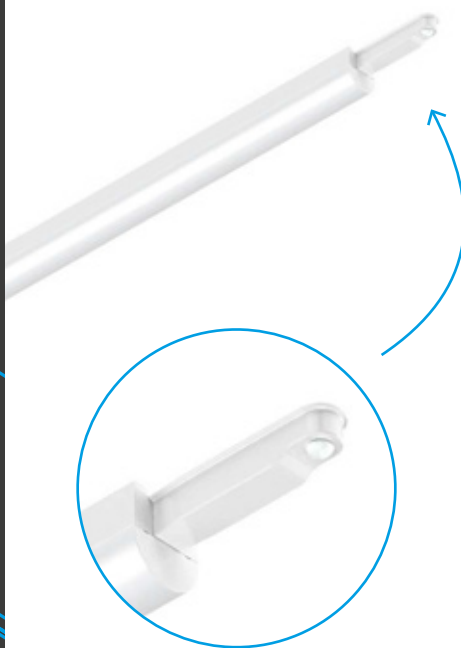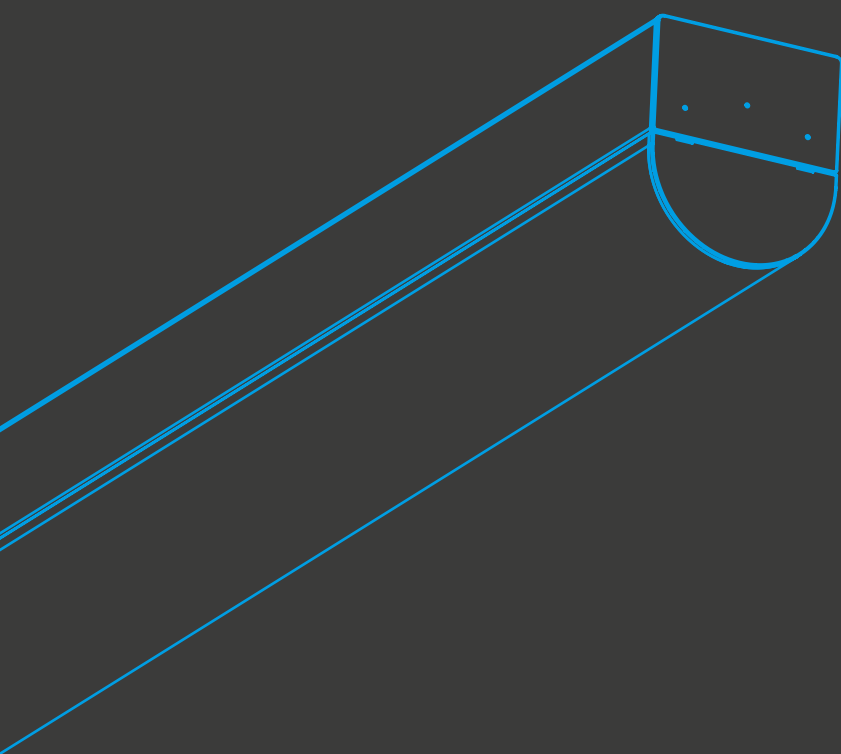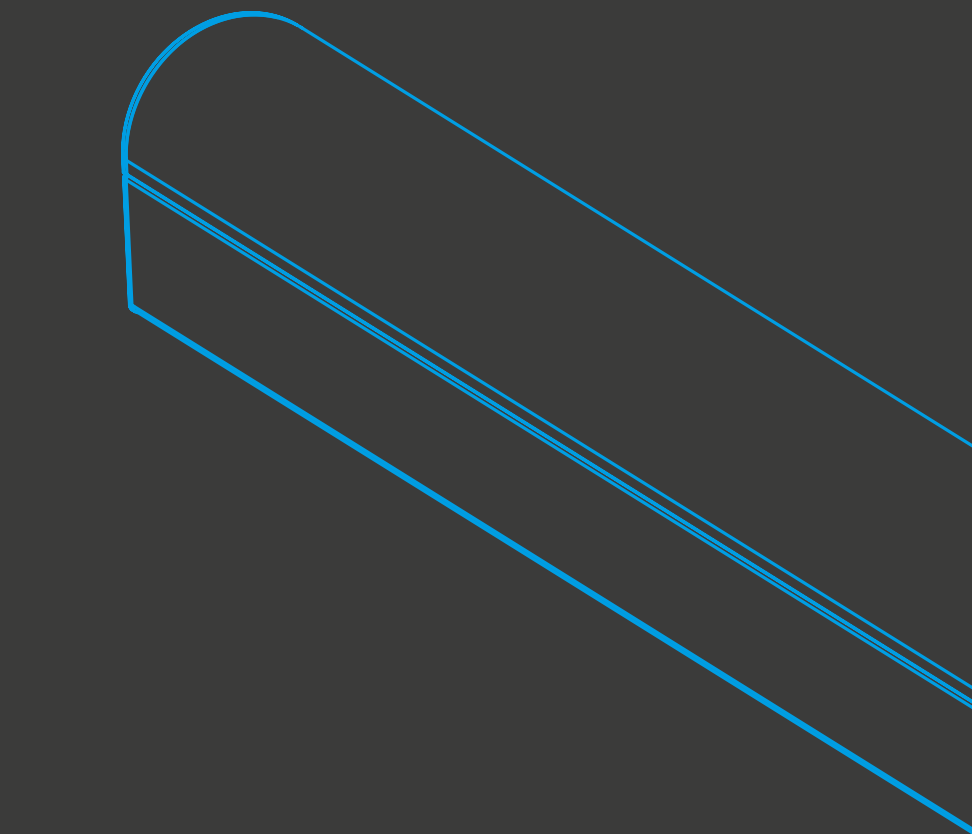

Integrated PIR sensor for motion-dependent light control, with adjustable range and run-on time.

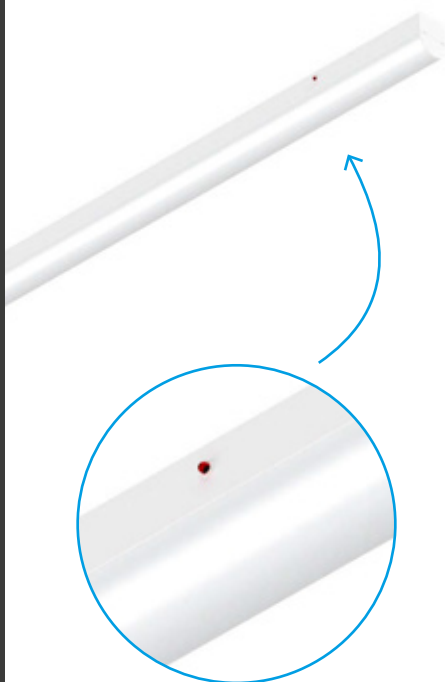

Emergency lighting module with automated self-test function in accordance with EN 62034 – up to 3 hours of autonomy in the event of a power failure.

BATTEN

PRODUCT ADVANTAGES

Replacement product for conventional T5/T8 lights

Service life up to **100,000 hours**

EASY TO INSTALL thanks to through-wiring as standard

Flexibly adjustable thanks to **Multi-Lumen** and **Multi-Colour**

All DALI variants support **DC operation**

Halogen-free


**MULTI
LUMEN** **MULTI
COLOR**



Service life
100,000
hours

BATTEN

INDOOR

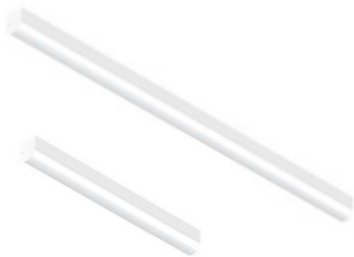


BATTEN P

MULTI
LUMEN

MULTI
COLOR

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
BATTEN P 600 28, 830 / 840 / 850, WH	○	20 W	220-240 V	2.600 lm	130 lm/w	3.000 K
				2.800 lm	140 lm/w	4.000 K
				2.800 lm	140 lm/w	5.000 K
BATTEN P 600 52, 830 / 840 / 850, WH	○	35 W	220-240 V	5.000 lm	145 lm/w	3.000 K
				5.000 lm	145 lm/w	4.000 K
				5.200 lm	150 lm/w	5.000 K
BATTEN P 600 52, 830 / 840 / 850, WH, EM, 3H	○	35 W	220-240 V	5.000 lm	145 lm/w	3.000 K
				5.000 lm	145 lm/w	4.000 K
				5.200 lm	150 lm/w	5.000 K
BATTEN P 1200 52, 830 / 840 / 850, WH, PIR	○	35 W	220-240 V	5.000 lm	145 lm/w	3.000 K
				5.000 lm	145 lm/w	4.000 K
				5.200 lm	150 lm/w	5.000 K
BATTEN P 1200 52, 830 / 840 / 850, WH, DALI	○	35 W	220-240 V	5.000 lm	145 lm/w	3.000 K
				5.000 lm	145 lm/w	4.000 K
				5.200 lm	150 lm/w	5.000 K
BATTEN P 1200 52, 830 / 840 / 850, WH, DALI, EM, 3H	○	35 W	220-240 V	5.000 lm	145 lm/w	3.000 K
				5.000 lm	145 lm/w	4.000 K
				5.200 lm	150 lm/w	5.000 K

*S = in stock
O = to order

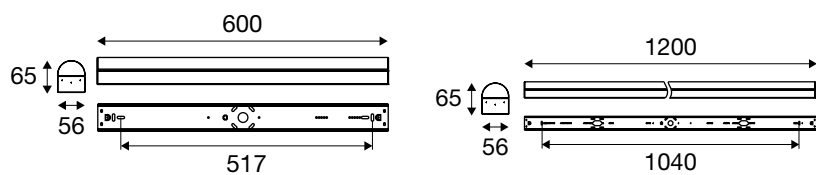

	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	O	1009251	43.00
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	O	1009252	60.00
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	O	1009253	111.00
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	O	1009254	85.00
100.000h L80B10	>80	28,8	-	-	-	DALI	✓	O	1009258	102.00
100.000h L80B10	>80	28,8	-	-	-	DALI	✓	O	1009259	170.00



L (mm): 2000

Product designation	Colour	Availability*	Prod no.	GBP
BATTEN P SCK 2000 Safety cable 2000mm		O	1009262	9.00

BATTEN

INDOOR



BATTEN P




MULTI
LUMEN

MULTI
COLOR

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
BATTEN P 1500 72, 830 / 840 / 850, WH		48 W	220-240 V	6.700 lm	140 lm/w	3.000 K
				6.700 lm	140 lm/w	4.000 K
				7.200 lm	150 lm/w	5.000 K
BATTEN P 1500 72, 830 / 840 / 850, WH, EM, 3H		48 W	220-240 V	6.700 lm	140 lm/w	3.000 K
				6.700 lm	140 lm/w	4.000 K
				7.200 lm	150 lm/w	5.000 K
BATTEN P 1500 72, 830 / 840 / 850, WH, PIR		48 W	220-240 V	6.700 lm	140 lm/w	3.000 K
				6.700 lm	140 lm/w	4.000 K
				7.200 lm	150 lm/w	5.000 K
BATTEN P 1500 72, 830 / 840 / 850, WH, DALI		48 W	220-240 V	6.700 lm	140 lm/w	3.000 K
				6.700 lm	140 lm/w	4.000 K
				7.200 lm	150 lm/w	5.000 K
BATTEN P 1500 72, 830 / 840 / 850, WH, DALI, EM, 3H		48 W	220-240 V	6.700 lm	140 lm/w	3.000 K
				6.700 lm	140 lm/w	4.000 K
				7.200 lm	150 lm/w	5.000 K

*S = in stock
O = to order






	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	O	1009255	68.00
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	O	1009256	119.00
100.000h L80B10	>80	28,8	-	-	-	On / Off	✓	O	1009257	94.00
100.000h L80B10	>80	28,8	-	-	-	DALI	✓	O	1009260	102.00
100.000h L80B10	>80	28,8	-	-	-	DALI	✓	O	1009261	157.00



L (mm): 2000

Product designation	Colour	Availability*	Prod no.	GBP
BATTEN P SCK 2000 Safety cable 2000mm		O	1009262	9.00

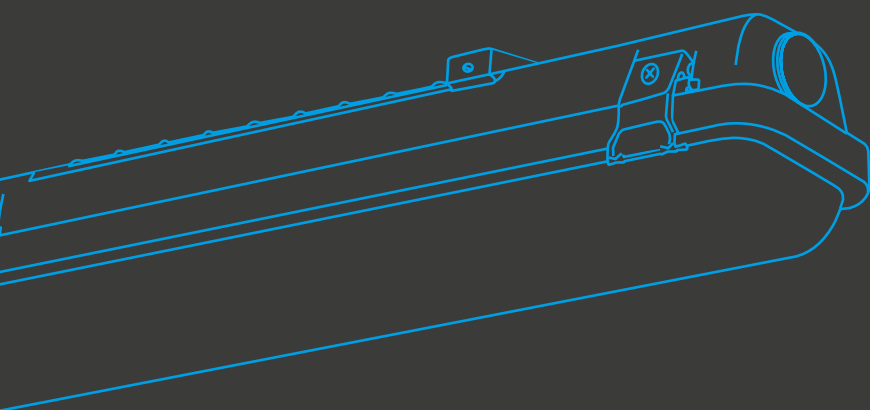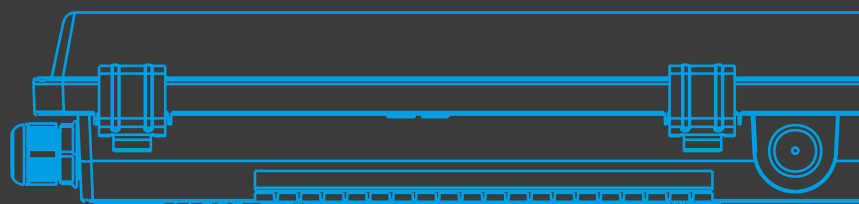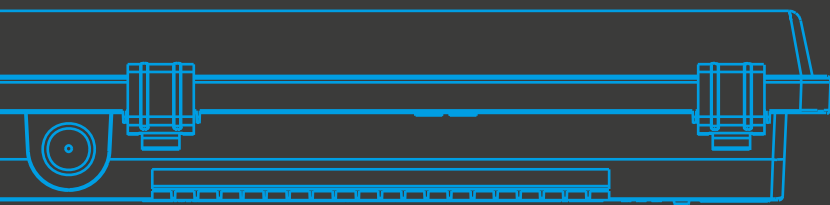

WATERPROOF V



WATERPROOF C & P



Open the cap without tools

Emergency lighting module with automated self-test function in accordance with EN 62034 – up to 3 hours of autonomy in the event of a power failure.

WATERPROOF

PRODUCT ADVANTAGES

High energy savings thanks to **Efficiencies of up to 180 lm/W** (depending on model at least 130 lm/W)

Reliable use in demanding environments thanks to IP65, IK08 and a service life of up to **100,000 hours**

EASY TO INSTALL thanks to tool-free cap opening for quick installation and maintenance as well as integrated through-wiring

Flexibly adjustable thanks to **Multi-Lumen** and **Multi-Colour**

All versions support **DC operation**

Optionally available **with HF sensor** for intelligent and energy-efficient control

Service life
100,000
hours

**MULTI
LUMEN** **MULTI
COLOR**



PRODUCT VARIANTS


	WATERPROOF V	WATERPROOF C	WATERPROOF P
Service life	50.000h L80B10	75.000h L80B10	100.000h L80B10
Energy efficiency	140 lm/W	150 lm/W	180 lm/W
CRI	>80	>80	>80
Control	On / Off, DALI	On / Off, DALI, Sensor	On / Off, DALI, Sensor



WATERPROOF

INDOOR

WATERPROOF V




MULTI
LUMEN **MULTI**
COLOR



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
WATERPROOF V 600 28 830/840/850 ML IP65	○	20 W	220-240 V	2.600 lm	140 lm/W	3.000 K
				2.800 lm	140 lm/W	4.000 K
				2.800 lm	140 lm/W	5.000 K
WATERPROOF V DALI 600 28 830/840/850 ML DALI IP65	○	20 W	220-240 V	2.600 lm	140 lm/W	3.000 K
				2.800 lm	140 lm/W	4.000 K
				2.800 lm	140 lm/W	5.000 K
WATERPROOF V 1200 41 830/840/850 ML IP65	○	27 W	220-240 V	3.800 lm	140 lm/W	3.000 K
				4.100 lm	140 lm/W	4.000 K
				4.000 lm	140 lm/W	5.000 K
WATERPROOF V DALI 1200 41 830/840/850 ML DALI IP65	○	27 W	220-240 V	3.800 lm	140 lm/W	3.000 K
				4.100 lm	140 lm/W	4.000 K
				4.000 lm	140 lm/W	5.000 K
WATERPROOF V 1500 60 830/840/850 ML IP65	○	40 W	220-240 V	5.600 lm	140 lm/W	3.000 K
				6.000 lm	140 lm/W	4.000 K
				6.000 lm	140 lm/W	5.000 K
WATERPROOF V DALI 1500 60 830/840/850 ML DALI IP65	○	40 W	220-240 V	5.600 lm	140 lm/W	3.000 K
				6.000 lm	140 lm/W	4.000 K
				6.000 lm	140 lm/W	5.000 K

*S = in stock
O = to order

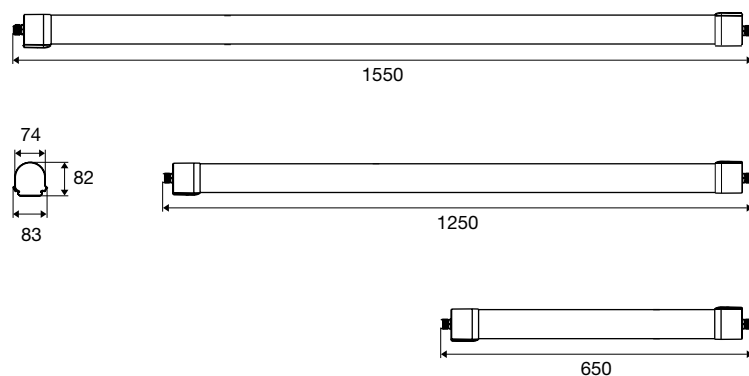

	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	GBP
50.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	0,8 kg	On / Off	✓	S	1010834	57.00
50.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	0,8 kg	DALI	✓	S	1010837	91.00
50.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,49 kg	On / Off	✓	S	1010835	74.00
50.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	1,49 kg	DALI	✓	S	1010838	111.00
50.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,78 kg	On / Off	✓	S	1010836	85.00
50.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	1,78 kg	DALI	✓	S	1010839	122.00

WATERPROOF



INDOOR

WATERPROOF C



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
WATERPROOF C 1200 57 830/840/850 ML IP65	●	38 W	220-240 V	5.250 lm	150 lm/W	3.000 K
				5.700 lm	150 lm/W	4.000 K
				5.600 lm	150 lm/W	5.000 K
WATERPROOF C 1200 57 830/840/850 ML EM 3H IP65	●	38 W	220-240 V	5.250 lm	150 lm/W	3.000 K
				5.700 lm	150 lm/W	4.000 K
				5.600 lm	150 lm/W	5.000 K
WATERPROOF C 1200 57 830/840/850 ML HF IP65	●	38 W	220-240 V	5.250 lm	150 lm/W	3.000 K
				5.700 lm	150 lm/W	4.000 K
				5.600 lm	150 lm/W	5.000 K
WATERPROOF C 1200 57 830/840/850 ML HF EM 3H IP65	●	38 W	220-240 V	5.250 lm	150 lm/W	3.000 K
				5.700 lm	150 lm/W	4.000 K
				5.600 lm	150 lm/W	5.000 K
WATERPROOF C 1200 57 830/840/850 ML DALI IP65	●	38 W	220-240 V	5.250 lm	150 lm/W	3.000 K
				5.700 lm	150 lm/W	4.000 K
				5.600 lm	150 lm/W	5.000 K
WATERPROOF C 1200 57 830/840/850 ML DALI EM 3H IP65	●	38 W	220-240 V	5.250 lm	150 lm/W	3.000 K
				5.700 lm	150 lm/W	4.000 K
				5.600 lm	150 lm/W	5.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	GBP
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	S	1010809	71.00
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	S	1010810	136.00
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	S	1010811	96.00
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	O	1010812	157.00
75.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	1,8 kg	DALI	✓	S	1010817	108.00
75.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	1,8 kg	DALI	✓	O	1010818	173.00

WATERPROOF

INDOOR





WATERPROOF C



**MULTI
LUMEN** **MULTI
COLOR**

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
WATERPROOF C 1500 71 830/840/850 ML IP65		47 W	220-240 V	6.500 lm	150 lm/W	3.000 K
				7.100 lm	150 lm/W	4.000 K
				7.000 lm	150 lm/W	5.000 K
WATERPROOF C 1500 71 830/840/850 ML EM 3H IP65		47 W	220-240 V	6.500 lm	150 lm/W	3.000 K
				7.100 lm	150 lm/W	4.000 K
				7.000 lm	150 lm/W	5.000 K
WATERPROOF C 1500 71 830/840/850 ML HF IP65		47 W	220-240 V	6.500 lm	150 lm/W	3.000 K
				7.100 lm	150 lm/W	4.000 K
				7.000 lm	150 lm/W	5.000 K
WATERPROOF C 1500 71 830/840/850 ML HF EM 3H IP65		47 W	220-240 V	6.500 lm	150 lm/W	3.000 K
				7.100 lm	150 lm/W	4.000 K
				7.000 lm	150 lm/W	5.000 K
WATERPROOF C 1500 71 830/840/850 ML DALI IP65		47 W	220-240 V	6.500 lm	150 lm/W	3.000 K
				7.100 lm	150 lm/W	4.000 K
				7.000 lm	150 lm/W	5.000 K
WATERPROOF C 1500 71 830/840/850 ML DALI EM 3H IP65		47 W	220-240 V	6.500 lm	150 lm/W	3.000 K
				7.100 lm	150 lm/W	4.000 K
				7.000 lm	150 lm/W	5.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	GBP
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	S	1010813	87.00
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	S	1010814	153.00
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	S	1010815	113.00
75.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	O	1010816	174.00
75.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2 kg	DALI	✓	S	1010819	125.00
75.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2 kg	DALI	✓	O	1010820	189.00

WATERPROOF

INDOOR



WATERPROOF P




MULTI
LUMEN

MULTI
COLOR

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
WATERPROOF P 1200 65 830/840/850 ML IP65		37 W	220-240 V	6.000 lm	180 lm/W	3.000 K
				6.500 lm	180 lm/W	4.000 K
				6.400 lm	180 lm/W	5.000 K
WATERPROOF P 1200 65 830/840/850 ML EM 3H IP65		37 W	220-240 V	6.000 lm	180 lm/W	3.000 K
				6.500 lm	180 lm/W	4.000 K
				6.400 lm	180 lm/W	5.000 K
WATERPROOF P 1200 65 830/840/850 ML HF IP65		37 W	220-240 V	6.000 lm	180 lm/W	3.000 K
				6.500 lm	180 lm/W	4.000 K
				6.400 lm	180 lm/W	5.000 K
WATERPROOF P 1200 65 830/840/850 ML HF EM 3H IP65		37 W	220-240 V	6.000 lm	180 lm/W	3.000 K
				6.500 lm	180 lm/W	4.000 K
				6.400 lm	180 lm/W	5.000 K
WATERPROOF P 1200 65 830/840/850 ML DALI IP65		37 W	220-240 V	6.000 lm	180 lm/W	3.000 K
				6.500 lm	180 lm/W	4.000 K
				6.400 lm	180 lm/W	5.000 K
WATERPROOF P 1200 65 830/840/850 ML DALI EM 3H IP65		37 W	220-240 V	6.000 lm	180 lm/W	3.000 K
				6.500 lm	180 lm/W	4.000 K
				6.400 lm	180 lm/W	5.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	GBP
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	S	1010821	83.00
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	S	1010822	148.00
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	S	1010823	108.00
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	1,8 kg	On / Off	✓	O	1010824	169.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	1,8 kg	DALI	✓	S	1010829	119.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	1,8 kg	DALI	✓	O	1010830	184.00

WATERPROOF

INDOOR



WATERPROOF P





MULTI
LUMEN


MULTI
COLOR

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
WATERPROOF P 1500 81 830/840/850 ML IP65		46 W	220-240 V	7.500 lm	180 lm/W	3.000 K
				8.100 lm	180 lm/W	4.000 K
				8.000 lm	180 lm/W	5.000 K
WATERPROOF P 1500 81 830/840/850 ML EM 3H IP65		46 W	220-240 V	7.500 lm	180 lm/W	3.000 K
				8.100 lm	180 lm/W	4.000 K
				8.000 lm	180 lm/W	5.000 K
WATERPROOF P 1500 81 830/840/850 ML HF IP65		46 W	220-240 V	7.500 lm	180 lm/W	3.000 K
				8.100 lm	180 lm/W	4.000 K
				8.000 lm	180 lm/W	5.000 K
WATERPROOF P 1500 81 830/840/850 ML HF EM 3H IP65		46 W	220-240 V	7.500 lm	180 lm/W	3.000 K
				8.100 lm	180 lm/W	4.000 K
				8.000 lm	180 lm/W	5.000 K
WATERPROOF P 1500 81 830/840/850 ML DALI IP65		46 W	220-240 V	7.500 lm	180 lm/W	3.000 K
				8.100 lm	180 lm/W	4.000 K
				8.000 lm	180 lm/W	5.000 K
WATERPROOF P 1500 81 830/840/850 ML DALI EM 3H IP65		46 W	220-240 V	7.500 lm	180 lm/W	3.000 K
				8.100 lm	180 lm/W	4.000 K
				8.000 lm	180 lm/W	5.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	GBP
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	S	1010825	102.00
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	S	1010826	168.00
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	S	1010827	128.00
100.000h L80B10	>80	3*2,5 mm ²	-20° + 40°C	2 kg	On / Off	✓	O	1010828	190.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2 kg	DALI	✓	S	1010831	139.00
100.000h L80B10	>80	5*2,5 mm ²	-20° + 40°C	2 kg	DALI	✓	O	1010832	204.00

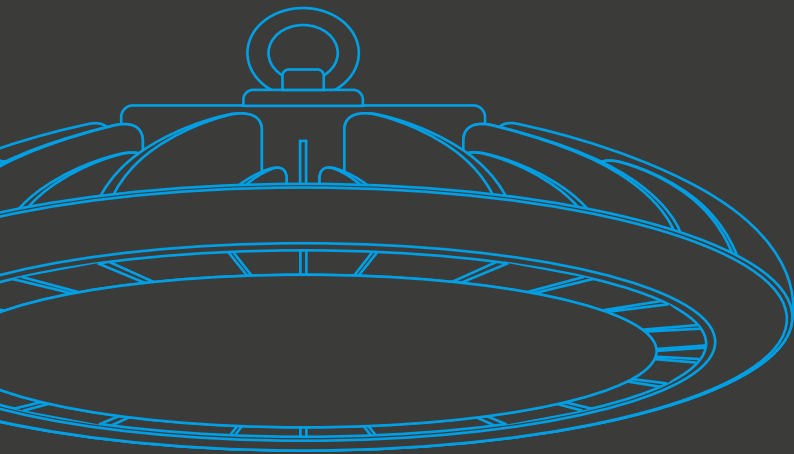

With suspension set
for HIGHBAY V



With reflector 100°



With mounting bracket

HIGHBAY

PRODUCT ADVANTAGES

Energy savings of up to 65 % compared to conventional high-bay lights

Flexibly adjustable thanks to **Multi-Lumen**

Additional reflectors available to reduce glare

Optimised weight and size thanks to compact design

High-quality appearance and modern design

Ambient temperature: -40° to 40° Celsius

MULTI LUMEN

Intelligent
control
available

PRODUCT VARIANTS

	HIGHBAY V	HIGHBAY C
Service life	50.000h L80B50	70.000h L80B10
Energy efficiency	160 lm/W	175 lm/W
CRI	>80	>80
Control	On / Off	On / Off, DALI, Sensor, Casambi

HIGHBAY

INDOOR



HIGHBAY V




IP65IK08

MULTI
LUMEN

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
HIGHBAY V 330 840, 330, 100 / 120 / 170 / 200 W, 90°	●	200 W	220-240 V	32.000 lm	160 lm/W	4.000 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	GBP
50.000h L80B50	>80	-	-40°C - 40°C	2,3 kg	On / Off	×	S	1007679	202.00



Ø x H (mm):
435 x 130



Ø x L (mm):
19,2 x 1500



L x W x H (mm):
202,5 x 49,6 x 132

Product designation	Colour	Availability*	Prod no.	GBP
HIGHBAY V 330 Reflector 100°		S	1007677	43.00
HIGHBAY V Suspension kit 1500 mm		S	1007676	21.00
HIGHBAY V Connecting element 60° adjustable		S	1007678	21.00

HIGHBAY C



**MULTI
LUMEN**



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
HIGHBAY C 340 60 / 80 / 100 W, 840	●	100 W	220-240 V	17.500 lm	175 lm/W	4.000 K
HIGHBAY C 400 120 / 160 / 200 W, 840	●	200 W	220-240 V	35.000 lm	175 lm/W	4.000 K
HIGHBAY C DALI 400 200 W, 840	●	200 W	220-240 V	35.000 lm	175 lm/W	4.000 K



Ø x H (mm):
413 x 176




Ø x H (mm):
480 x 185



L x W x H (mm):
250 x 40 x 33


Product designation	Colour	Availability*	Prod no.	GBP
HIGHBAY C 340 PC reflector	-	S	1008529	59.00
HIGHBAY C 400 PC reflector	-	S	1008530	77.00
HIGHBAY C U-bracket	●	S	1008528	12.00

*S = in stock
O = to order

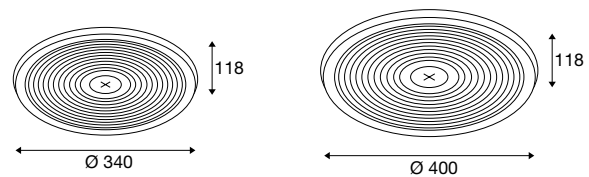

	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	GBP
70.000h L80B10	>80	-	-30°C - 50°C	2,8 kg	On / Off	×	S	1008525	231.00
70.000h L80B10	>80	-	-30°C - 50°C	3,3 kg	On / Off	×	S	1008526	257.00
70.000h L80B10	>80	-	-30°C - 50°C	3,4 kg	DALI	×	S	1008527	300.00

Product designation	Colour	Availability*	Prod no.	GBP
HIGHBAY C CASAMBI module	○	S	1008576	111.00
HIGHBAY C Remote control	○	S	1008575	42.00
HIGHBAY C PIR sensor	○	S	1008532	42.00
HIGHBAY C HF sensor	○	S	1008531	42.00

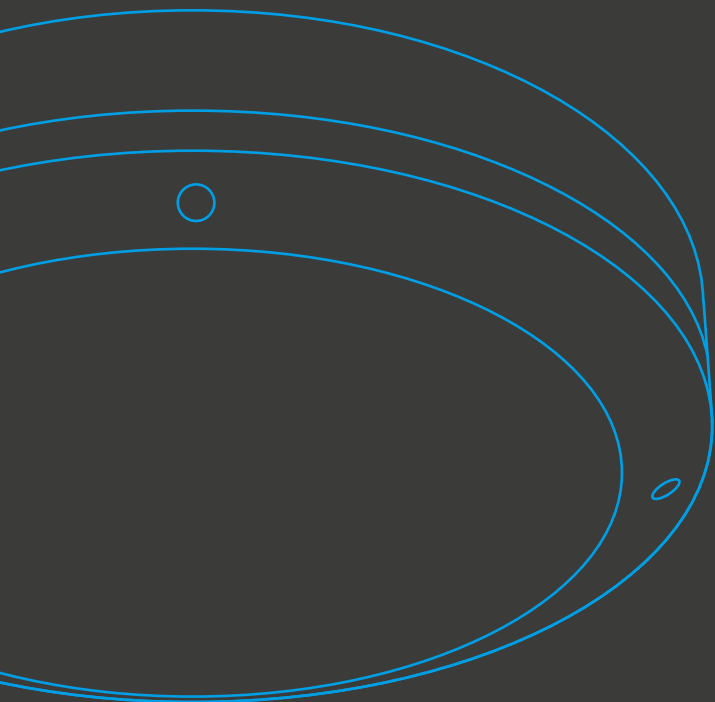

3.000 K



4.000 K



6.500 K

BULKHEAD

PRODUCT ADVANTAGES

Robust outdoor light with a high level of protection against vandalism thanks to **IK10**

Flexibly adjustable thanks to **Multi-Colour**

EASY TO INSTALL due to removable device carrier

High-quality light with homogeneous light emission

Energy savings of up to 55% compared to lights with compact fluorescent lamps (CFLs)

**MULTI
LUMEN** **MULTI
COLOR**



Robust
with IK10



BULKHEAD

OUTDOOR



OUTDOOR BULKHEAD V

IP65

IK10

MULTI


LUMEN

MULTI


COLOR

Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
OUTDOOR BULKHEAD V 360 <i>20 W, 830 / 840 / 865, IP65, IK10, BK</i>	●	20 W	200-240 V	1.750 lm	87 lm/W	3.000 K
				1.850 lm	92 lm/W	4.000 K
				1.900 lm	95 lm/W	6.500 K
OUTDOOR BULKHEAD V 360 <i>20 W, 830 / 840 / 865, IP65, IK10, WH</i>	○	20 W	200-240 V	1.750 lm	87 lm/W	3.000 K
				1.850 lm	92 lm/W	4.000 K
				1.900 lm	95 lm/W	6.500 K
OUTDOOR BULKHEAD V 360 SENSOR <i>20 W, 830 / 840 / 865, IP65, IK10, BK, HF</i>	●	20 W	200-240 V	1.750 lm	87 lm/W	3.000 K
				1.850 lm	92 lm/W	4.000 K
				1.900 lm	95 lm/W	6.500 K
OUTDOOR BULKHEAD V 360 SENSOR <i>20 W, 830 / 840 / 865, IP65, IK10, WH, HF</i>	○	20 W	200-240 V	1.750 lm	87 lm/W	3.000 K
				1.850 lm	92 lm/W	4.000 K
				1.900 lm	95 lm/W	6.500 K

*S = in stock
O = to order



	CRI		Ambient temperature	Weight	Control	Emergency lighting	Availability*	Prod no.	GBP
50.000h L80B50	>80	110°	-20°C - 45°C	2,4 kg	On / Off	✓	S	1007514	73.00
50.000h L80B50	>80	110°	-20°C - 45°C	2,4 kg	On / Off	✓	S	1008833	73.00
50.000h L80B50	>80	110°	-20°C - 45°C	2,4 kg	On / Off	✓	S	1007515	95.00
50.000h L80B50	>80	110°	-20°C - 45°C	2,4 kg	On / Off	✓	S	1008901	94.00

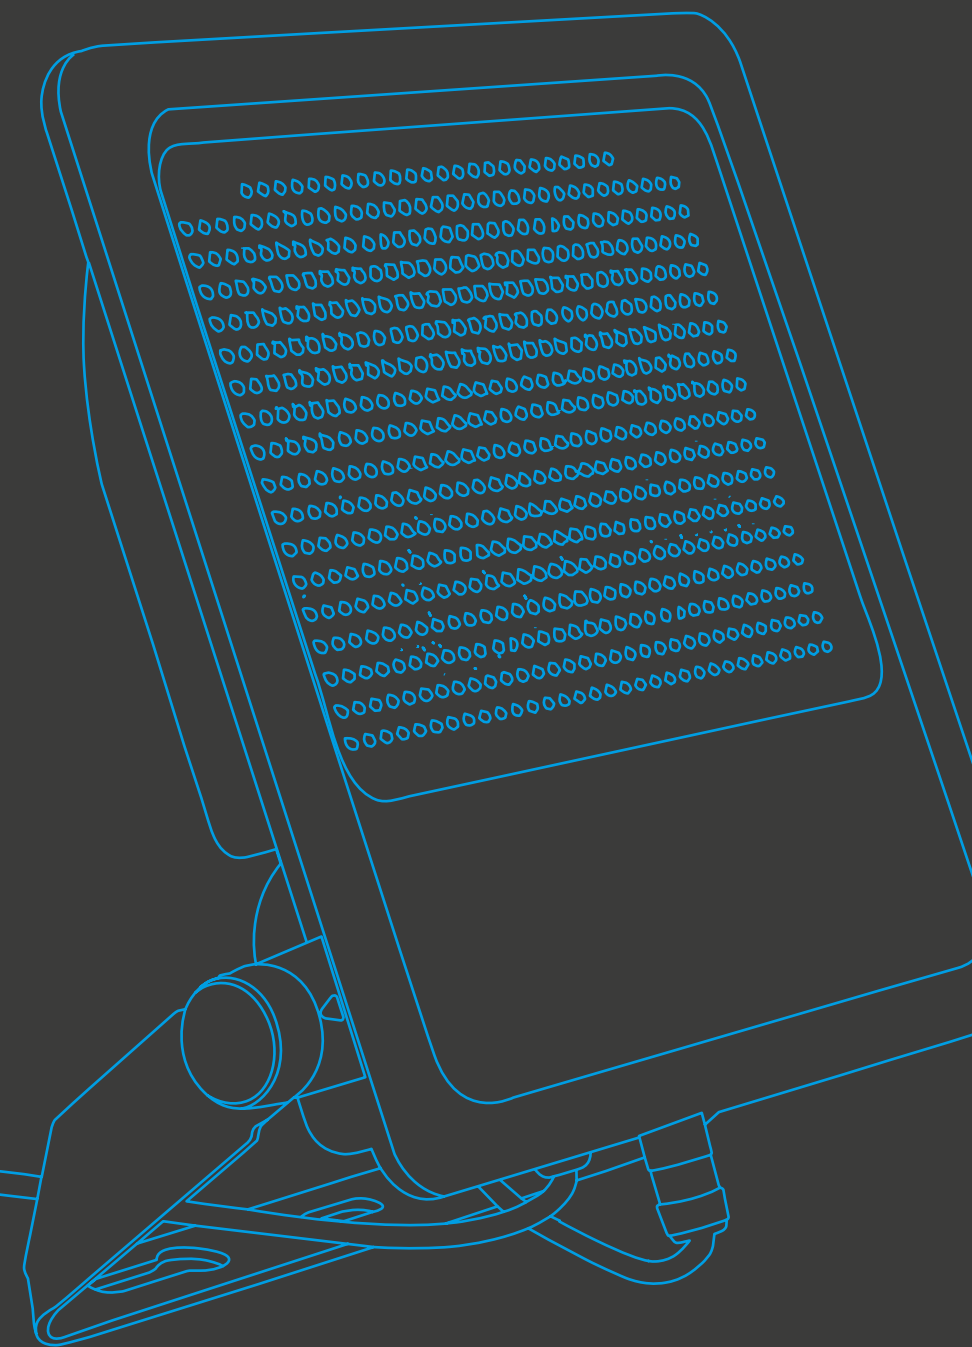

+



=



PIR sensor available separately

FLOODLIGHT

PRODUCT ADVANTAGES

Very high light output with **up to 32,400 lm** – Ideal for large outdoor areas such as car parks, logistics centres or sports facilities

High **efficiency of up to 170 lm/W** ensures maximum energy savings for high-output applications

Service life up to **80,000 hours**

Flexibly customisable thanks to **Multi-Lumen**

Asymmetrical light distribution for targeted illumination of large areas without light pollution

PIR sensor and remote control for **intelligent control** are available separately

Service life
80,000 hours

**MULTI
LUMEN**



FLOODLIGHT


OUTDOOR

FLOODLIGHT C



Product designation	Colour	Max. Total wattage	Mains voltage	Max. Luminous flux	Efficiency	Colour temperature
FLOODLIGHT C 50 / 75 / 100 W, 830, IP66	●	100 W	100-240 V	15.300 lm	160 lm/W	3.000 K
FLOODLIGHT C 50 / 75 / 100 W, 840, IP66	●	100 W	100-240 V	16.300 lm	169 lm/W	4.000 K
FLOODLIGHT C 100 / 150 / 200 W, 830, IP66	●	200 W	100-240 V	30.800 lm	163 lm/W	3.000 K
FLOODLIGHT C 100 / 150 / 200 W, 840, IP66	●	200 W	100-240 V	32.400 lm	170 lm/W	4.000 K

*S = in stock
O = to order

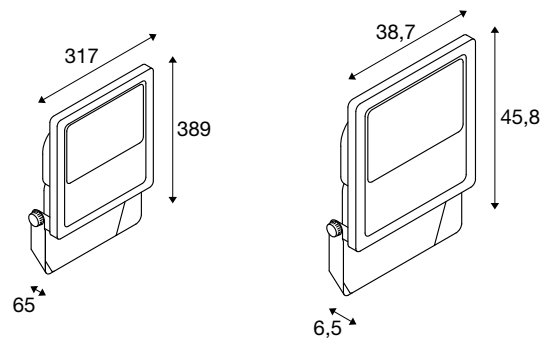

	CRI	UGR				Control	Emergency lighting	Availability*	Prod no.	GBP
80.000h L80B10	>80	-	100°	-	180°	On / Off	×	S	1008907	305.00
80.000h L80B10	>80	-	100°	-	180°	On / Off	×	S	1008908	305.00
80.000h L80B10	>80	-	105°	-	180°	On / Off	×	S	1008909	390.00
80.000h L80B10	>80	-	105°	-	180°	On / Off	×	S	1008910	390.00



L x W x H (mm):
266 x 92 x 104



L x W x H (mm):
266 x 115 x 104



L x W x H (mm):
200 x 50 x 40



L x W x H (mm):
260 x 50 x 50




Ø x H (mm):
27,5 x 43




L x W x H (mm):
125 x 70 x 25

Product designation	Colour	Availability*	Prod no.	GBP
FLOODLIGHT C, Pole mount 60		S	1008911	98.00
FLOODLIGHT C, Pole mount 76		S	1008912	111.00
FLOODLIGHT C, Mounting bracket <i>small</i>		S	1008913	51.00
FLOODLIGHT C, Mounting bracket <i>large</i>		S	1008914	68.00
FLOODLIGHT C, PIR Sensor		S	1008915	77.00
FLOODLIGHT C, Remote control for PIR Sensor		S	1008916	60.00

COLOUR EXPLANATION



Black



White



Aluminium



Grey

EXPLANATION OF SYMBOLS



Protection classes:

- Protection class I/Protective conductor
- Protection class II/Protection by double or reinforced insulation



IP protection class



IK impact resistance rating



Half-diffusion angle:

Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.



Pivoting capacity in degrees:



Through-wiring possible



Fire-retardant: developed and tested for use in certain fire-retardant suspended ceilings. Fire protection application (up to 90 minutes, tested with EN 1365-2:2014 'Fire resistance tests for load-bearing components – Part 2: Ceilings and roofs'). Outdoor use and fire protection applications (up to 90 minutes, BS476-20:1987 and BS476-21:1987)



Can be installed in insulation.
Can be covered with many types of thermal insulation materials.



The Multi-Lumen function allows you to gradually adjust the light intensity of the light so that you can customise the lighting to suit your needs.



Multi-Colour describes the ability of a light to produce different light colours. For lights with adjustable Multi-Colour, the light colour can be adjusted using a switch.

Technically, several LED chips with different colours are installed. By changing the switch status, the proportion of the respective LEDs is adjusted to produce the desired light colour.

Many of the products shown in this catalogue are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this catalogue are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. All product descriptions/information are therefore subject to change and errors excepted.

All of the products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This catalogue contains a general range and is not country-specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards. All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical changes!

The presentation of our lights with realistic photos showing them in use is possible thanks to the kind cooperation and agreement of the owners or designers of the environments depicted in the images. We would like to take this opportunity to thank all those who consented to having photos taken and used.

The publication of this catalogue invalidates the prices specified in previous lists and catalogues. SLV is entitled to adjust the respective price list to changing market conditions, in the event of significant changes in procurement costs, changes in value added tax or procurement prices.

All prices are recommended retail prices (RRP) and indicated in GBP without VAT.

Publisher
SLV GmbH, Germany
Daimlerstraße 21-23
52531 Übach-Palenberg
T +49 (0) 2451 4833-0
slv.com

Copyright
© SLV GmbH, 2025

SLV GmbH | Daimlerstraße 21-23, 52531 Uebach-Palenberg, Germany, +49 (0) 2451 4833 - 333, info@slv.de
SLV Austria | +49 (2451) 4833 355, export@slv.de
SLV Belgium | Herentalsebaan 429, B-2160 Wommelgem, +32 (0) 3/385 30 08, info@slv.be
SLV Nordics | Flade Engvej 4, 9900 Frederikshavn, Denmark, +45 9310 7474, info@nordics.slv.com
SLV France | Zac du Martelet, 88, rue Henri Dépaigneux, F-69400 Limas, +33 4 74 02 71 20, infofr@slv.com
SLV LIGHTING UK LTD | Unit E Chiltern Park, Boscombe Road, Dunstable, LU5 5LT, +44 (0)203 968 11 00, sales@uk.slv.com
SLV Italia S.r.l. | Via Lecco, 19/D, 23896 Bevera di Sirtori (LC), +39 039 5983575, infoit@slv.com
SLV Nederland | Kazernestraat 19, 5928 NL Venlo, +31 773204343, info@slv.nl
SLV i Norge, del av SLV Nordics | Tors veg 9B, 7035 Trondheim, +47 4777 1080, post-no@slv.com
SLV Poland | al. Jerozolimskie 200, 02-486 Warszawa, Polska, (0048 22) 722-49-75, slv@slv.pl
SLV Portugal | R. Margarida de Abreu, no13 – Lj2, 1900-314 Lisboa, +351 210 185 961, info@pt.slv.com
SLV Swiss SA | Route du Bey 6 Box 1-4, Z.I. La Jonnaire, CH-1847 Rennaz, +41 218113232, info@slv-swiss.ch
SLV d.o.o | Barjanska cesta 50, SI-1000 Ljubljana, +386 1 2009 730, info@slv.si
SLV Spain | Antic Cami Ral Valencia, 38, L17, 08860 Castelldefels, Barcelona, 931 168 161, info@slv.es
SLV Czech s.r.o. | V Sedlci 28/17, CZ-160 00 Praha 6, +420 739 282 151, info@cz.slv.com