


**M2M**  
SERVICES

SIMPLICITY.  
APPLIED.

# UNIVERSAL SOLE/DUAL PATH COMMERCIAL FIRE COMMUNICATOR

**MQ03-LTE-M-FIRE-AV**

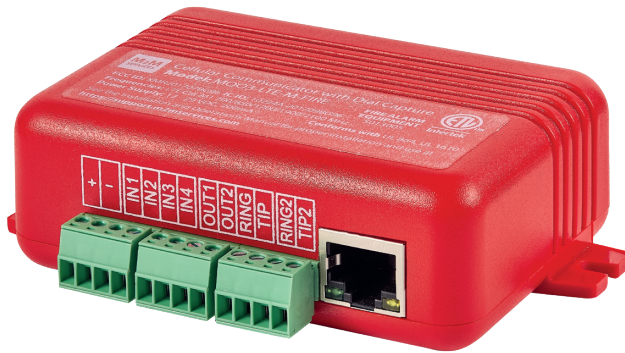

**5G** READY  
now with  
**LTE-M**

**AT&T**  
AND  
**verizon**  
IN ONE RADIO

**UL 864**



## **FUTURE-PROOF TECHNOLOGY**

Dual-SIM working on both AT&T/Verizon LTE-M networks in the same radio



## **QUICK AND EASY INSTALLATION**

supporting Contact ID, SIA and Pulse 4+2



## **RELIABLE DATA REPORTING**

to any Monitoring Station from coast to coast



## **IMPROVED PROFITABILITY**

Low flat monthly fees for cellular service

[www.m2mservices.com](http://www.m2mservices.com)

# MAIN FEATURES

**REPORTING FORMATS** – Dial Capture Interface supporting Contact ID, SIA and Pulse 4+2

**EXCEPTIONAL REDUNDANCY** – Dual Path communication; Dual-SIM for AT&T/Verizon.

**SUPERVISED CONNECTIVITY** – 5 minute polling

**ADMIN PORTAL** – Online 24/7 device management & real-time status monitoring of user accounts

**FULL EVENT REPORTING** – Reliable reporting to any Monitoring Station

**INSTALLER MOBILE APP** – Real-time on-site communication diagnostics and device configuration

**UNIVERSAL PANEL COMPATIBILITY** – Works on 12 to 29 VDC, supporting a wide range of fire panels

**4 PROGRAMMABLE INPUTS** – Used for relay output connection of the FACP

## SPECIFICATIONS

- Multi-band LTE Cat-M1  
700/850/1700/1900/2100 MHz
- 2 Telco interfaces (Dial Capture): CID, SIA, Pulse 4+2
- 4 inputs & 2 outputs (programmable)
- Supply voltage: +12 to +29 VDC
- Consumption: Standby 50mA, Peak 200mA
- Dimensions: 2.48" x 3.54" x 1.26"
- Weight: 2.56oz without antenna

## CERTIFICATIONS

- UL 864 - for Control Units and Accessories for Fire Alarm Systems, listed as a Sole Path/Dual Path cellular
- UL 1610 - for Central-Station Burglar-Alarm Units
- CSFM - 7300 - Fire Alarm Control Unit Accessories

## RCONTROL ADMIN MOBILE APP

