

M2M
SERVICES

SIMPLICITY.
APPLIED.

THE FUTURE-PROOF COMMUNICATOR FOR THE ALARM BUSINESS

MN02-LTE-M



5G READY
now with
LTE-M

AT&T
AND
verizon✓
IN ONE RADIO



FUTURE-PROOF TECHNOLOGY

Dual SIM working on both AT&T and Verizon networks in the same radio



REMOTE PANEL PROGRAMMING

Upload/Download via RING/TIP to select panels



INTERACTIVE FEATURES

Smartphone App for end users and Admin App for installers



IMPROVED PROFITABILITY

Low flat monthly fees for cellular service

www.m2mservices.com

MAIN FEATURES

UNIVERSAL PANEL COMPATIBILITY – Dial Capture supporting Contact ID, SIA and Pulse 4+2


UPLOAD/DOWNLOAD for select panels: DSC, Honeywell and NX series

REMOTE ARM/ DISARM/ STAY ARM of multiple partitions via keybus for select panels


EXCEPTIONAL REDUNDANCY – Dual-SIM, working on both AT&T and Verizon (model specific)

SUPERVISED CONNECTIVITY – 10 minute polling of the connection

Remote Upload/Download

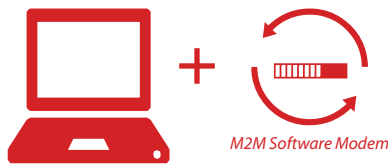

*The UDL software you are familiar with –
DLS, Compass, DL900*

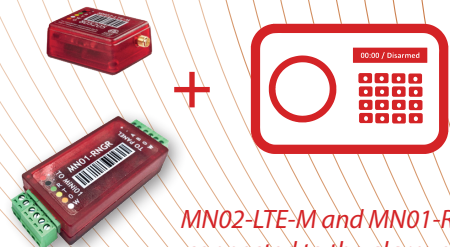

*MN02-LTE-M and MN01-RNGR
connected to the alarm panel*

MN02-LTE-M supports remote UDL via add-on MN01-RNGR module connected to the RING/TIP terminals for select panels (DSC, Honeywell and GE NX series)

SPECIFICATIONS

- Multi-band LTE Cat-M1
700/850/1700/1900/2100 MHz
- 1 input & 1 output (programmable)
- Supply voltage: +12 to +15 VDC
- Consumption: Standby 15mA, Peak 200mA
- Dimensions: 1.6" x 1.95" x 0.8"
- Weight: 1oz without antenna

SMARTPHONE APPs FOR END USERS & INSTALLERS

- RControl and RControl Admin for Android / iPhone
- Remote ARM STAY/AWAY, DISARM
- Real-time push and email notifications
- Multiple end users and devices per account
- 12 months of event history
- Device configuration and diagnostics

CERTIFICATIONS

- UL 864 - for Control Units and Accessories for Fire Alarm Systems, listed as a Sole Path/Dual Path cellular
- UL 1610 - for Central-Station Burglar-Alarm Units
- CSFM - 7300 - Fire Alarm Control Unit Accessories

