



EO GENIUS 2

The charger that makes switching to electric a business advantage.



KM 754836

FEATURES

Power: Up to 22kW charging, perfect for overnight commercial or depot charging (single-phase or three-phase options).

OCPP 1.6 compliant: Back-office agnostic, ready for open OCPP integration and additional security extensions.

Easy to install: No need for earth rods with built-in open PEN conductor protection.

Always connected: Wi-Fi, Bluetooth or Cat 5 Ethernet as standard. 4G cellular as optional extra.


Multiple load management options available: Distribute site power across your chargers using multiple local or automatic load management options.

Included extras: Built-in RFID reader and RFID cards available. Integrated MID meter to unlock billing options.

[Search 'EO Genius 2' to learn more](#)

EO CLOUD

Genius 2 connects to our charge point management software for enhanced insights, energy usage analysis, charge scheduling, telematics integration and more.

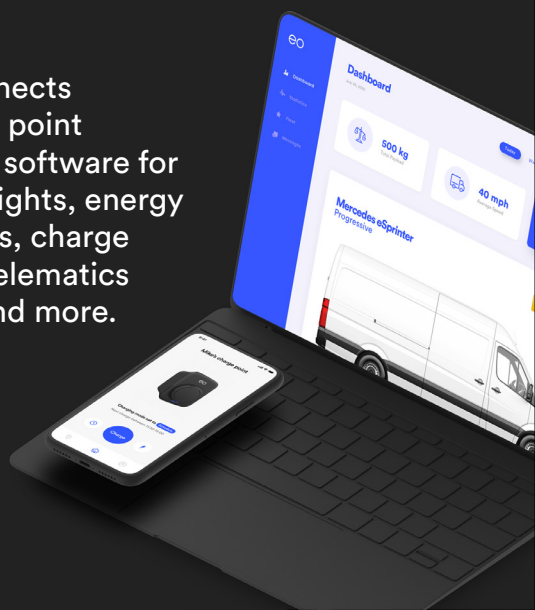

TECH SPECS

Dimensions:

330mm (h) x 220 mm (w) x 170mm (d)

Connection types: Universal Type 2 socket or tethered Type 2 cable.

Protection: DCL (Direct Current Leakage) included for applicable markets.

Durable: Impact, water and dust resistant with IP54 (socketed), IP56 (tethered) and IK08 protection ratings.

Built-in PME: Easy installation with wall or post-mounted options.