

Material Highlight:

LP 50 S

Aluminium Industry

Gouda Refractories delivers complete refractory solutions for anode baking furnaces, transfer ladles, melting furnaces and holding furnaces used in the production of aluminium and aluminium alloys.

The LP 50 S brick is a high density, low porosity, high strength 50% aluminium oxide brick. The combination of these improved characteristics, depending on furnace design and operational maintenance, result in operational advantages in anode baking furnaces, such as:




CCS
70 MPa

$\text{Na}_2\text{O} + \text{K}_2\text{O}$
< 0,3%

11%
Apparent
Porosity

- Increased refractory life.
- Reduction in fire cycle time and hence increased anode output.
- Reduction in flue wall maintenance costs.
- Reduction in fuel costs and hence CO₂ emissions.
- Possibility to make bigger anodes by reducing wall thickness.

The LP 50 S has been developed to satisfy clients' needs better – now and in the future – and, like Gouda Refractories had done before with AK 46 S, sets once again a new standard in refractory materials for flue walls in the anode baking industry.

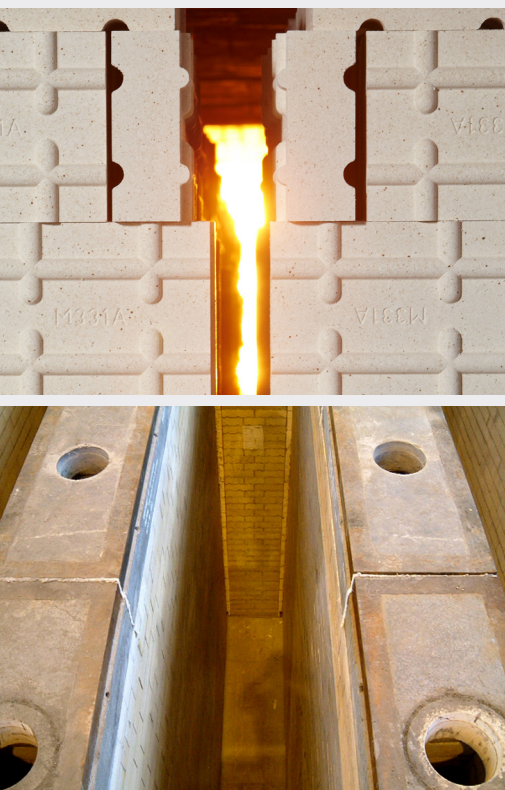

Technical Background

The LP 50 S is the result of selecting higher quality raw materials, further improving the production process and using higher fire temperatures in the manufacturing process. The low porosity, improved mineral composition and low alkali content have the following advantages:

- Higher refractoriness.
- Higher strength at process temperature.
- Higher thermal conductivity.

This means that the LP 50 S has a higher resistance to chemical attack mechanisms (alkali infiltration, SiO_2 depletion) and thermal attack mechanisms than the previous generation flue wall bricks.

The LP 50 S has been tested independently by Orton (USA), the Technical University of Sao Paulo (Brazil) and ICAR (France) and is approved by Riedhammer, RTA and Alcoa.

References

Aditya Birla Hindalco
Alcoa Lauralco
Alouette
Aluchemie
BHP South 32

Century Aluminium
EGA Dubal furnace 1,2,3 & 4
Hydro Ardal
Hydro Kurri Kurri

Hydro Sunndal
Magnitude 7
RTA Bell Bay Aluminium
Trimet

Materials				
		Quality		Improvement
		LP 50 S	AK 46 S	
Material Properties				
Maximum Service Temperature	°C	1.575	1.550	
Bulk Density	kg/m ³	2.500	2.400	
Apparent Porosity	%	11	< 15	36%
Physical Properties				
Cold Crushing Strength	MPa	70	50	40%
Thermal Shock Resistance	Cycles	25	15	67%
Thermal Conductivity (1.100 °C)	W/mK	2,55	2	28%
Chemical Analysis				
Al_2O_3	%	50	49	
SiO_2	%	46	47	
Fe_2O_3	%	< 1	< 1,2	
$\text{Na}_2\text{O} + \text{K}_2\text{O}$	%	< 0,3	< 0,5	

Values are typical. Datasheets are available upon request.

