

Call us at any point

Take the stress off; the experts at EnviroBuild can assist you with **any part of your project**, so please don't hesitate to give us a call.

We can help with anything from free product estimation to putting you in touch with trusted installers.

+44 (0) 208 088 4888

Trade pricing available

Work in trade? You can use our competitive trade discounts to pass along savings to your customers. Fill out our form, which can be found on our site at envirobuild.com/trade-discount

Contents

| Stone Effect Porcelain Tiles | 2 |
|------------------------------|----|
| Nood Effect Porcelain Tiles | 6 |
| Support Pedestals | 8 |
| Other Information | 1(|
| Installation Overviews | 10 |
| Commercial Installations | 12 |
| Gallery & Case Studies | 14 |
| Fibre Cement Boards | 20 |
| our Next Steps | 22 |

Outdoor Porcelain Paving

Stone Effect

Classic stone with a modern lift.

The practicality of porcelain with the sophistication of stone. These finishes are timeless and complement both traditional and contemporary settings. Each tile is unique with bespoke veins and patterns for luxurious natural beauty.

per m²

£42.99 ex. VAT

£51.59 inc. VAT

600 mm







per pack

£30.95 ex. VAT

£37.14 inc. VAT


600 mm

Dove Grey Oyster

Grey Shadow



- 0.72 m² per pack
- 20 mm thickness





Luxe Grey



Luxe Ivory

10-year warranty




Grey Shadow

Hard-wearing & scratch resistant



Slip resistant



request











Outdoor Porcelain Paving


Wood Effect

Replicating the natural beauty of wood.

Brings the restorative tranquillity of an alpine forest to your outdoor space. Every tile is made unique and radiates natural beauty, combining an authentically crafted wood effect with the practicality of porcelain.













Ash





Maple

More sizes available on request

Support pedestals



Adjustable Peds

£4.26 inc. VAT per 25-35 mm pedestal

- Support heights from 25–500 mm
- 20 year limited warranty for your peace of mind



Plastic Pedestals

£3.66 inc. VAT per 28-40 mm pedestal

- Support heights from 12–595 mm
- 20 year limited warranty for your peace of mind



Slope Correctors

£7.07 inc. VAT per 45-55 mm pedestal

- 0-5 degree slope correction
- 90 mm diameter
- Quick and simple to install

Spacer Gasket

£0.65 inc. VAT per item

- 3.5 mm paving spacer
- 90 mm diameter
- 2-way or 4-way spacer gaskets available



£3.59 inc. VAT per item

- Supports paver edges
- Quick and simple to install



Support Pads

£1.99 inc. VAT per item

- · 200 mm diameter
- 3 mm thickness
- 100% reclaimed rubber






Wet-lay patio

Anyone can do it


Laying a patio with this method **can be done by anyone** with basic practical DIY skills.

A clean, smooth look

Wet lay is what would be thought of as a 'typical patio' look; it gives a smooth, more modern look with rigid mortar jointing. If planned and installed correctly, wet-lay patio installations can last for decades.



Level out stone chippings into your dug out (150 mm deep) patio area.



Lay the first slab, tap with a rubber mallet on one side to adjust level.

Continue laying slabs, leaving gaps between them for pointing.

Paving Installation Overview

On pedestals

Save precious time


With our **easy-to-use paving spacer gaskets**, everything fits into place neatly.

Slopes made easy


EnviroBuild **pedestal heights can be easily adjusted** by rotating the tops, allowing for the guick creation of drainage slopes.




Find the full installation guide in the resource centre on our website, or simply scan the QR code.




Your area must have a 1.5-2% pitch and be cleared and waterproofed.



Lay pedestals using a spirit level, keeping a 1:80 drainage slope.



Gaskets are used for spacing and edge bars are added at perimeters.



Gaskets leave a 2-4 mm gap between tiles for rainwater.

Wind-uplift

Adjustable steel pedestals give total control over the height and slope of the structure.

MESA Non-combustible Adhesive is applied to the substructure to prevent wind-uplift.

- Perfect for balconies and terraces.
- Steel pedestals with joist cradles are used in the substructure.
- MESA Non-combustible Adhesive prevents wind-uplift.
- The 4 mm Paving Removal Joist Clip (pictured right) sits in the groove of our MESA Aluminium Joists, below the paving tiles, making the removal of vital paving areas possible.








Commercial Solutions


Open steel system

This system provides support using large steel trays and is made BS 8579 compliant with bespoke slopes. It was also engineered with wind-uplift security in mind.

- Perfect for open steel balconies.
- Steel trays provide full porcelain support.
- Bespoke steel slopes level the system.
- MESA Non-combustible Adhesive applied to substructure to prevent wind-uplift.


- +44 (0) 203 959 1220

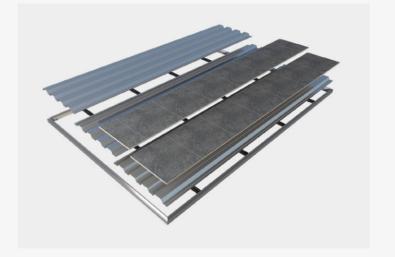

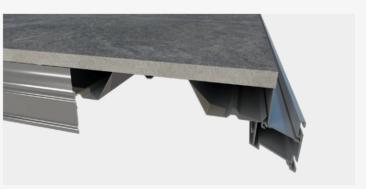











Case Study ****

Paved Veranda


66

Our requirements were for flooring that was stylish and practical, and also added to the wow factor of our glass veranda.

We chose the wood effect for the enclosed area and a complimentary plain tile for the other areas. We were very happy with the samples that EnviroBuild sent us.

Maldon, Essex

Pictured: Maple Outdoor Porcelain Paving

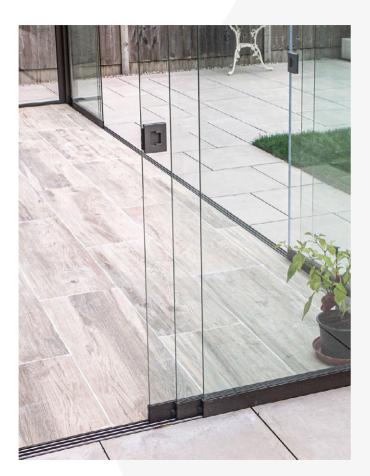



We visited a number of flooring companies and builders' merchants but kept coming back to the Maple Outdoor Porcelain tiles from EnviroBuild. The price was very competitive and the delivery time good.





Commerical Case Study

Thrayle House

Orientated around quality and high specifications, Thryale House was after a balcony flooring system to support its 170 new homes, accommodating for a variety of resident needs, from the elderly to families and couples.

Designed to comply with all current legislation, EnviroBuild's Outdoor Porcelain Paving was selected to furnish all balconies across the Thrayle House collection.

Lambeth, London

Pictured: Iron Outdoor Porcelain Paving (No Longer Sold)





Along with its reliable non-combustibility, a variety of impressive benefits include anti-fade technology, scratch resistance and low maintenance requirements for resident security and ease.





Fibre cement boards

These decking-styled tiles are made up of a wood-stone composite and have been authentically crafted with a wood-grain texture.







Sand Beige Coffee Brown



Cloud Grey



Fibre-cement Installation Overview


On pedestals

Save precious time


With our **easy-to-use hidden clip system**, everything fits into place quickly.

Slopes made easy

EnviroBuild **pedestal heights can be easily adjusted** by rotating the tops, allowing for the quick creation of drainage slopes.





The first board is screwed to the joist using 45 mm screws.



8 mm clips are inserted into the board's slots and screwed down.







The final board should be ripped to fit and screwed to the joists.

21

Your next steps





Speak to our expert, friendly team at any stage of your project.




Send us your plans

Email your plans for a same day quotation with our free estimation service.




View our resources

We have installation information and other downloads on our website.

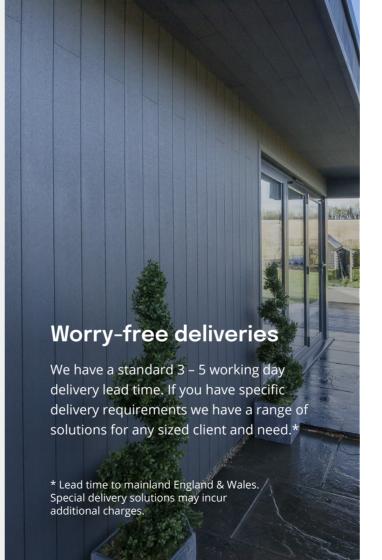

More from us

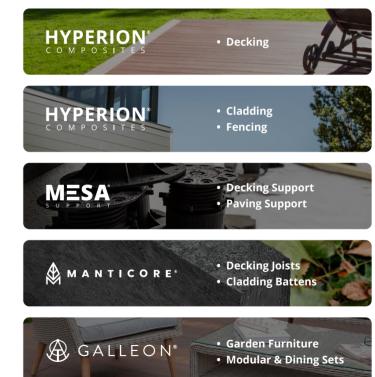

FSC Trademark Licence: FSC® C146926

Made from 100% recycled material



