


PARTS LIST - 2 PERSON ASSEMBLY:-		
A	FRAME	2 no.
B	FOOT BRACE	1 no.
C	PRE-ASSEMBLED TABLE TOP	1 no.
D	PRE-ASSEMBLED SEAT	2 no.
E	90mm S/STEEL SCREWS	4 no.
F	M10 x 110mm BOLT	12 no.
G	WASHER	12 no.
H	NUT	12 no.
J	CAP	12 no.

TOOLS:-
POWER DRILL WITH PHILIPS-HEAD BIT
17mm SPANNER

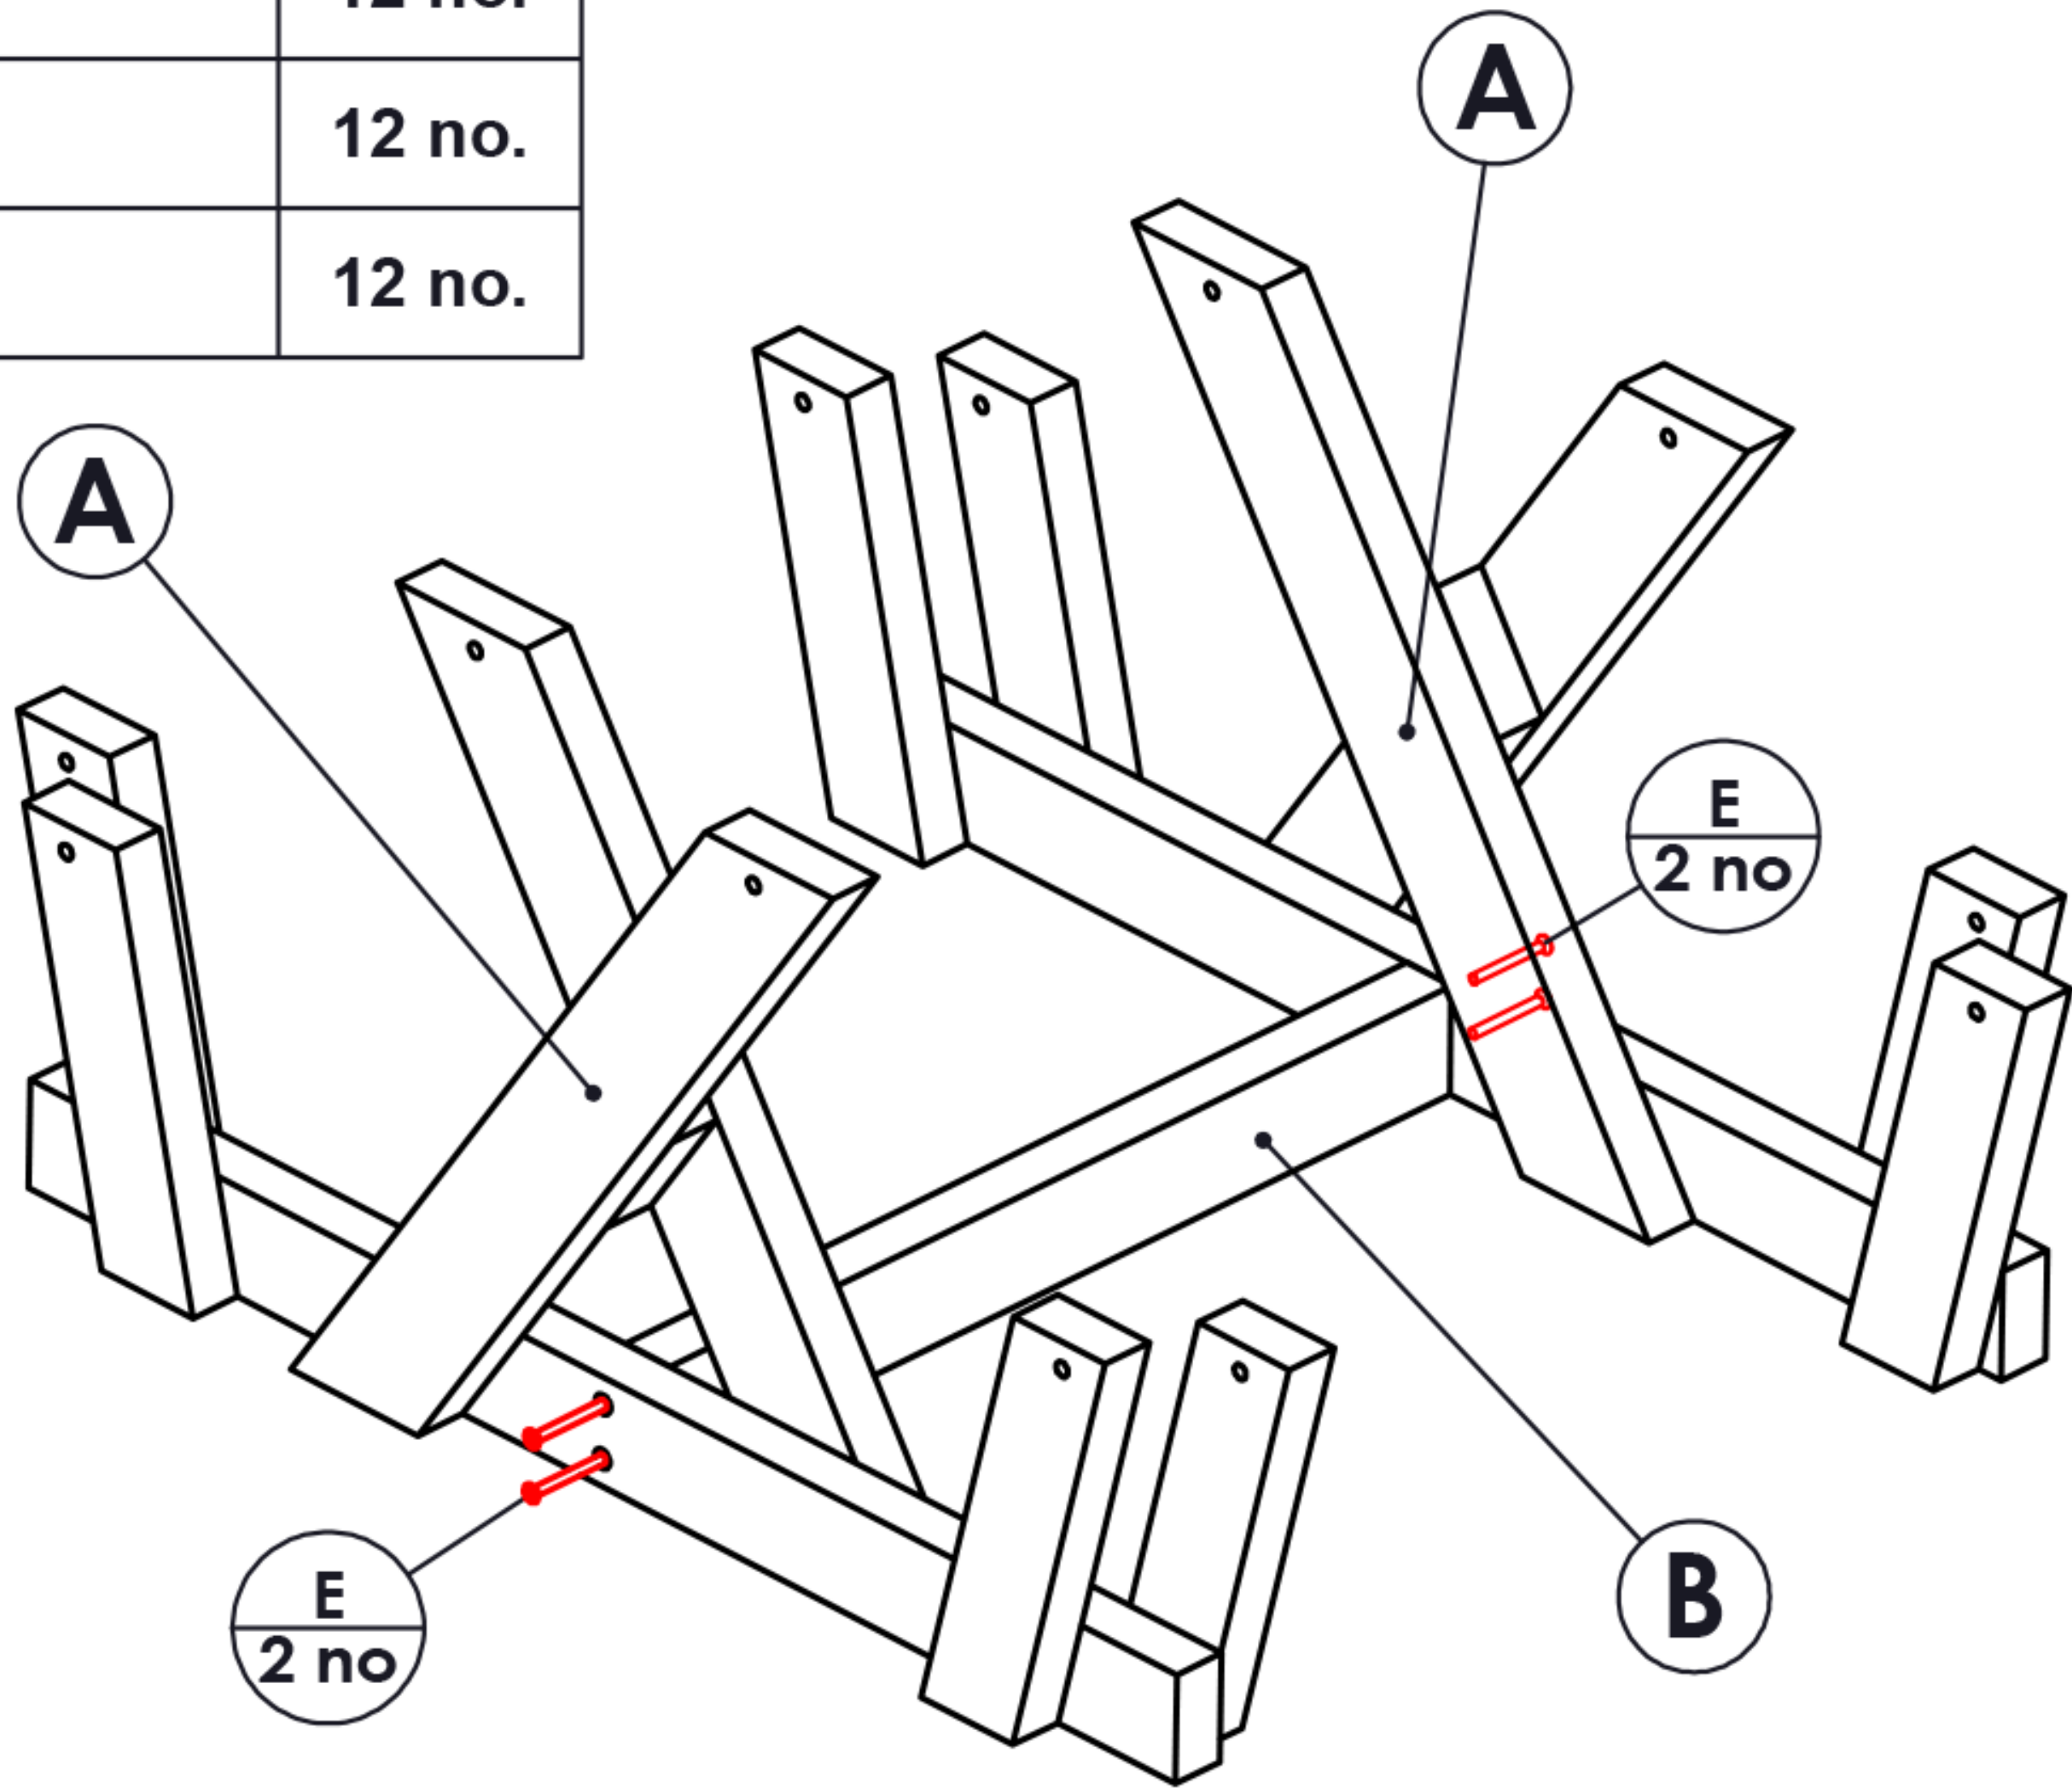

BEGIN ASSEMBLY WITH THE 2 FRAMES AND FOOT BRACE SET OUT ON A LEVEL SURFACE

POSITION THE FOOT BRACE CENTRALLY BETWEEN THE FRAMES AND IN LINE WITH THE PRE-DRILLED HOLES, THEN FIX THE BRACE IN PLACE USING 90mm SCREWS

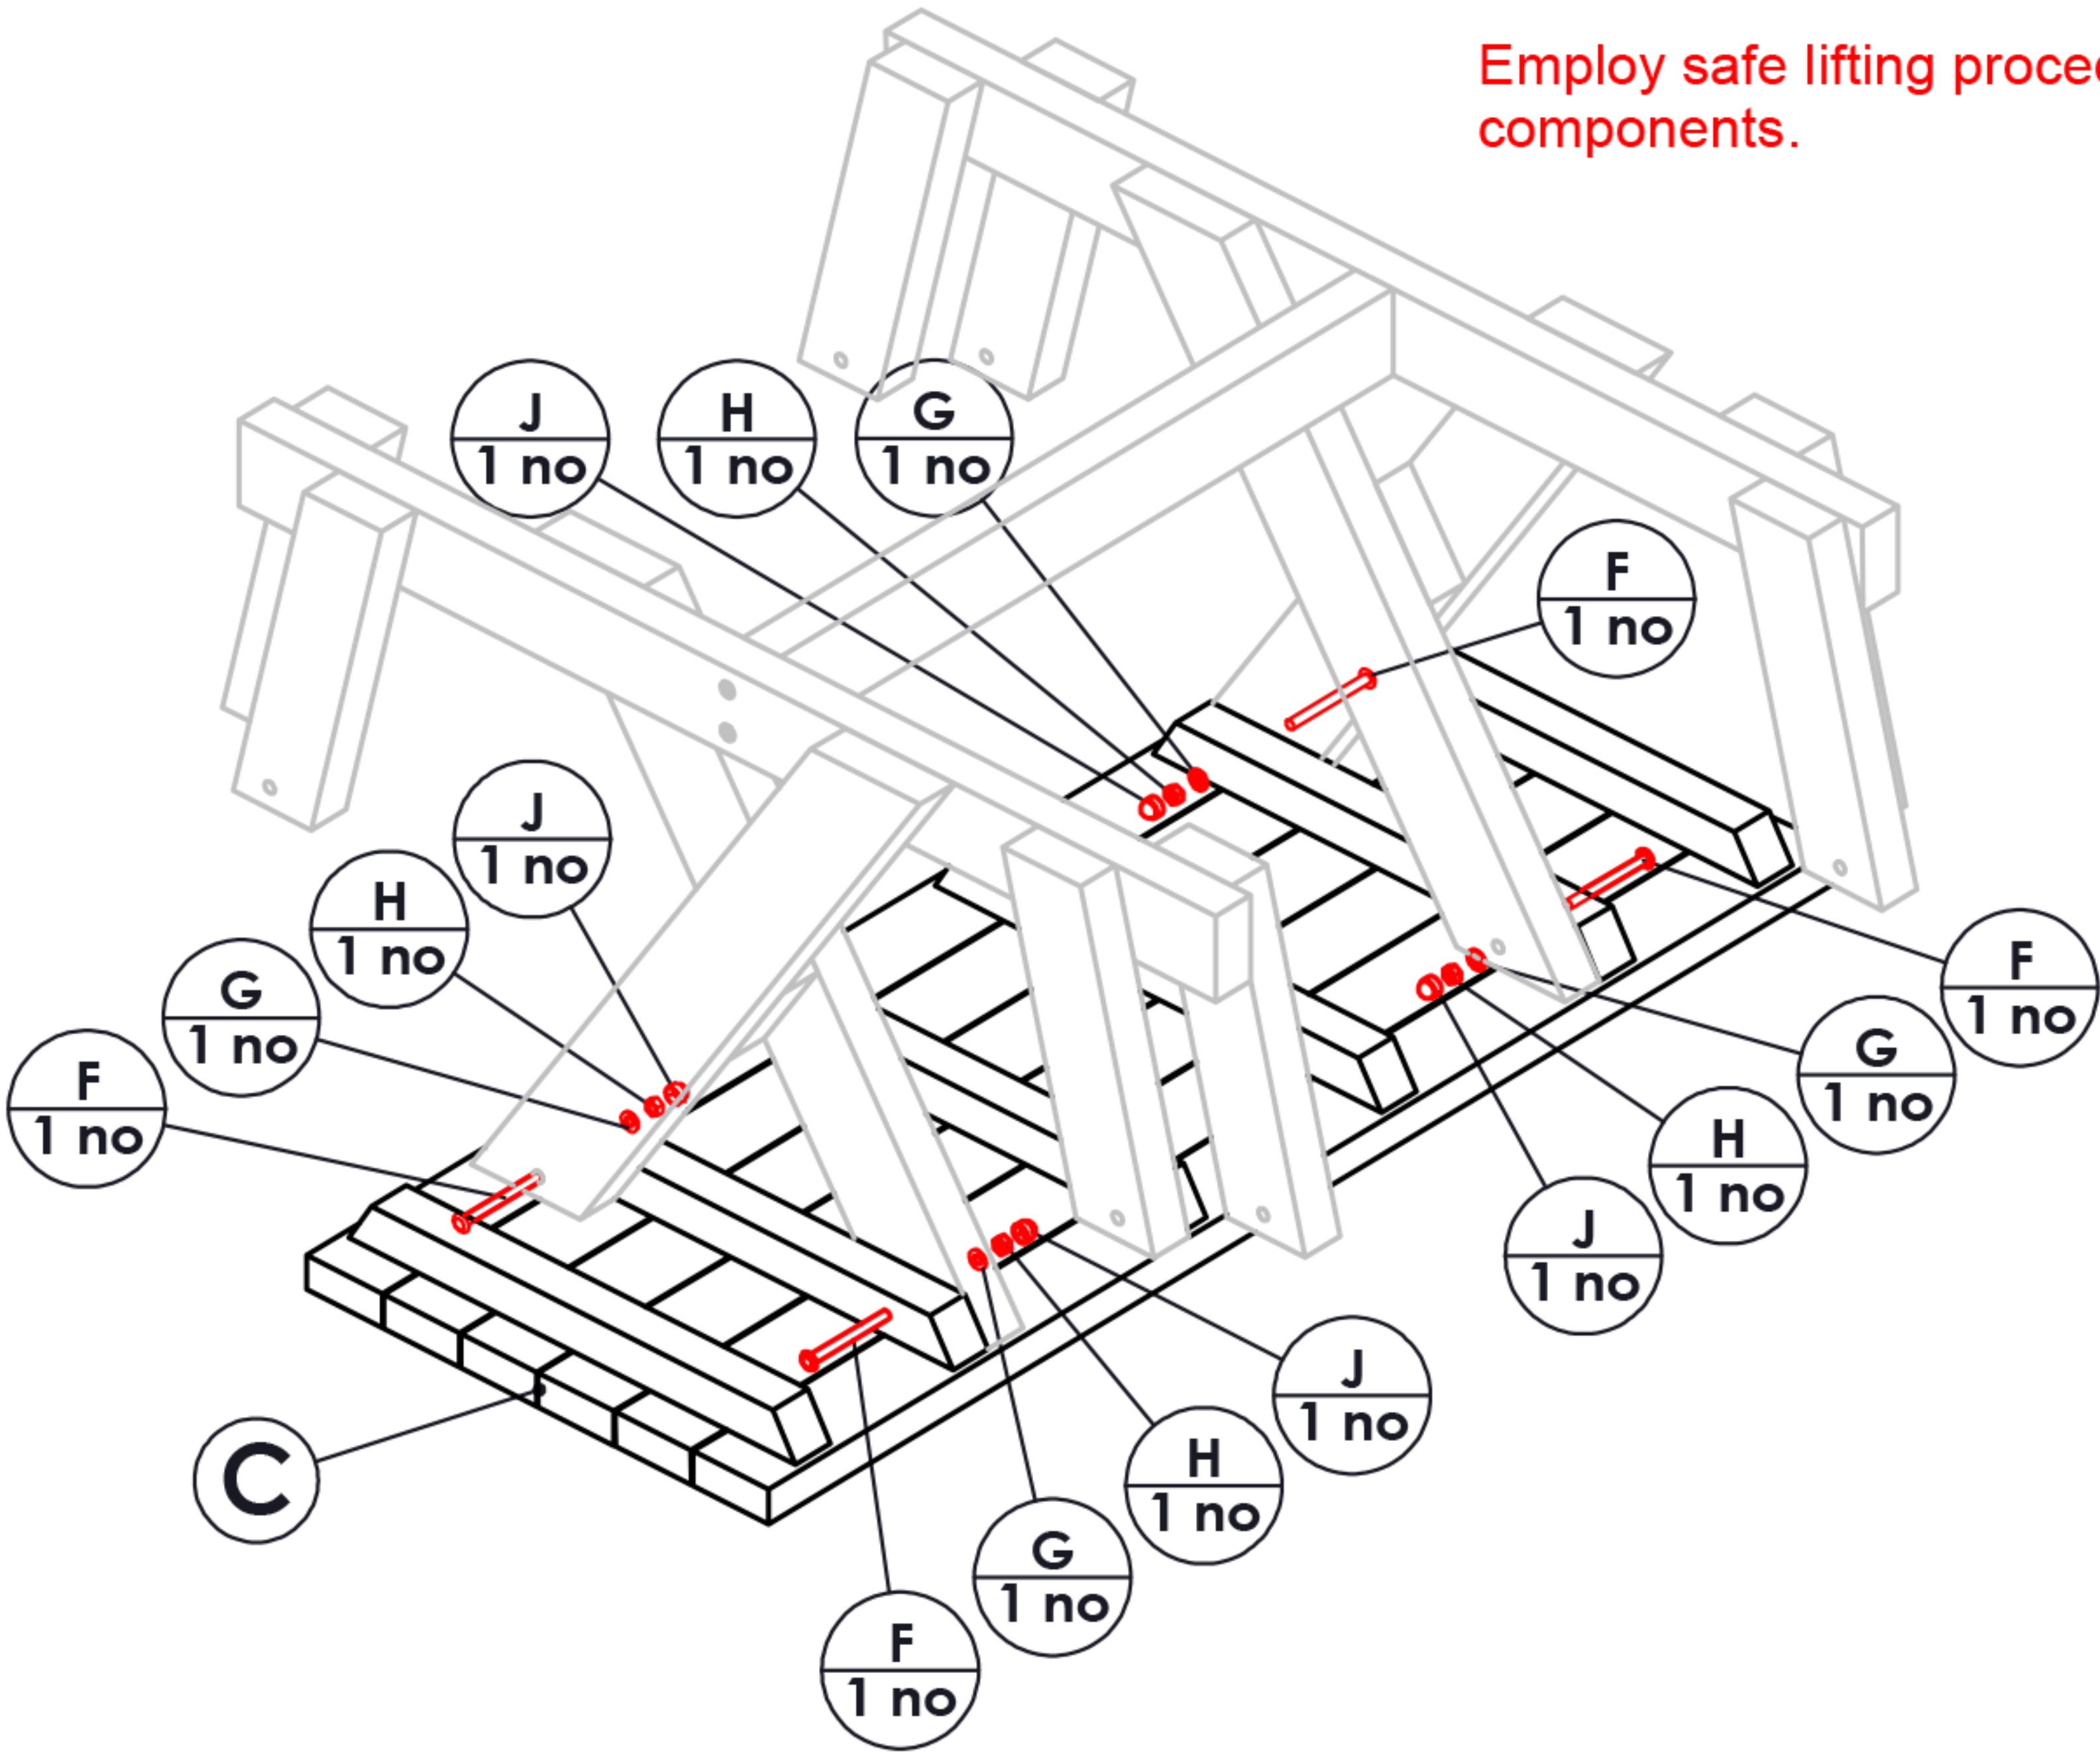


TABLE SHOWN UPSIDE DOWN FOR ILLUSTRATION PURPOSES ONLY

LOWER THE PRE-ASSEMBLED TABLE TOP ONTO THE FRAME. USING A PROVIDED M10 x 110mm BOLT, FIX THE BOLT THROUGH PRE-DRILLED HOLES IN THE FRAME AND TABLE TOP, ADD WASHER AND NUT AND TIGHTEN UP. COVER NUT WITH BLACK CAP


IMPORTANT:-

Ensure that you are familiar with these assembly instructions prior to commencing assembly.

We will not accept any claims resulting from products that have been wrongly assembled.

Employ safe lifting procedures when handling components.

TOOLS:-
17mm SPANNER

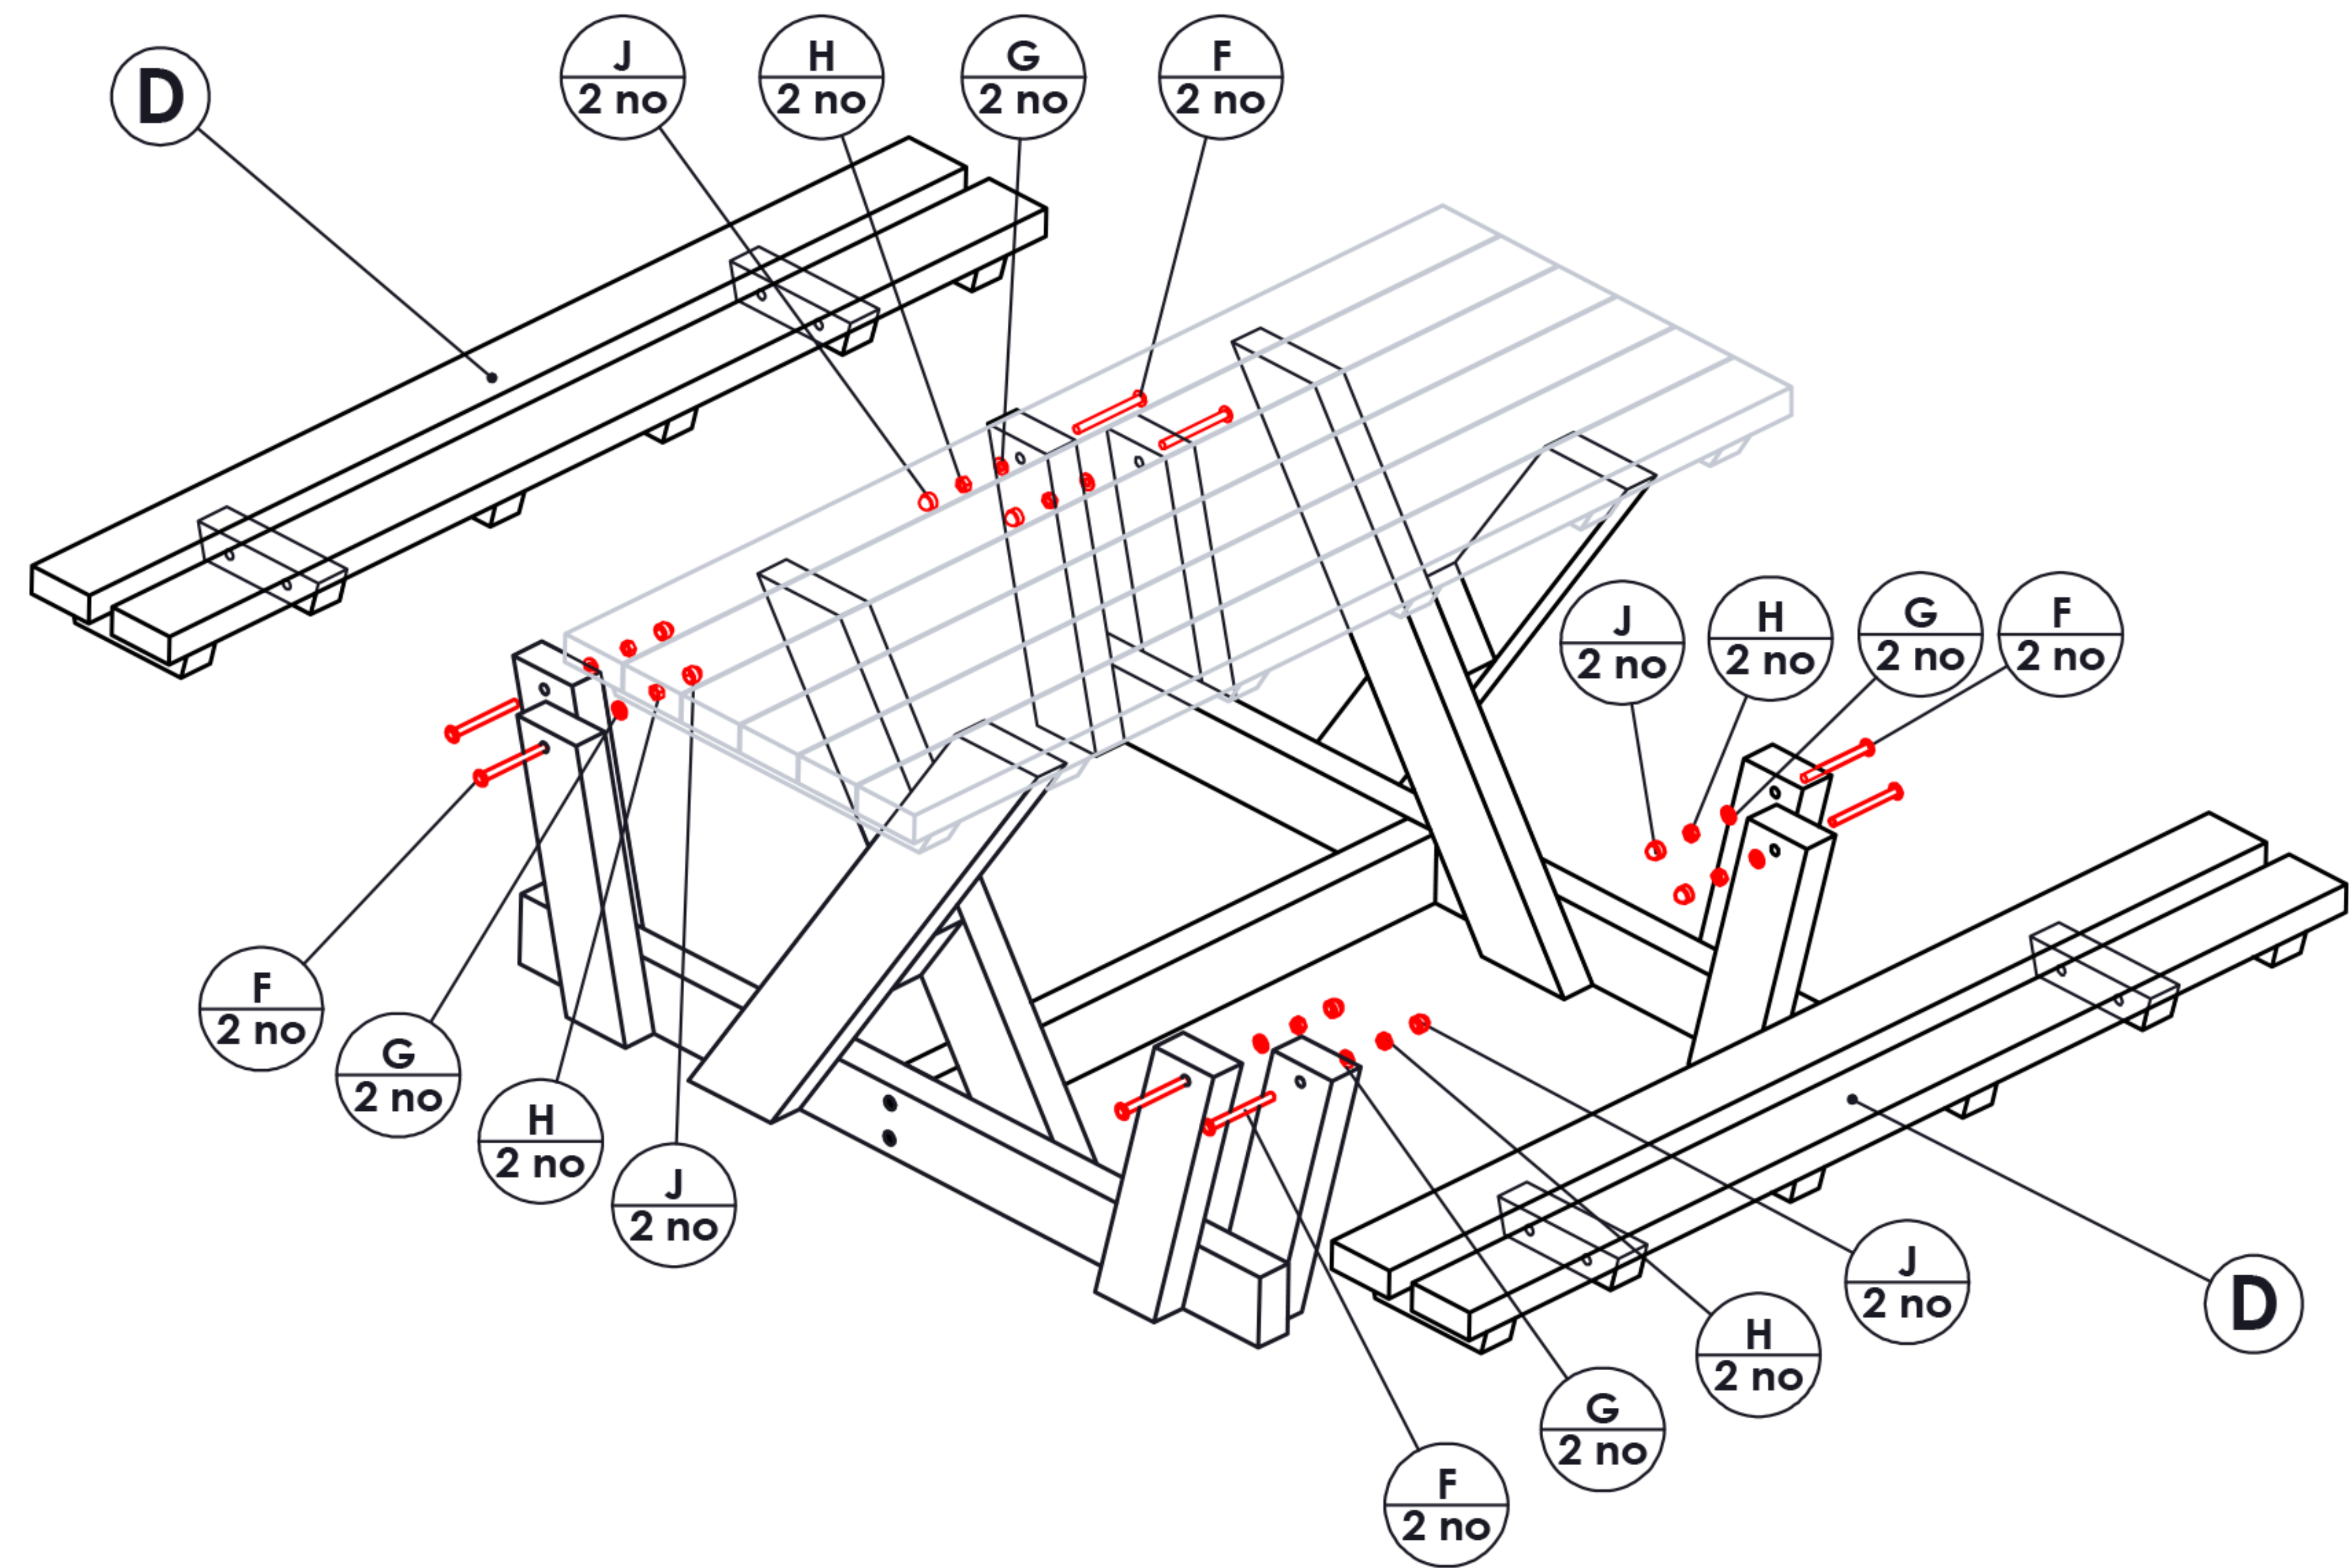

LOWER THE PRE-ASSEMBLED SEAT ONTO THE FRAME AND ALIGN THE HOLES OF THE SEAT TIES WITH THE HOLES ON THE SEAT SUPPORTS


USE M10 x 110mm BOLTS TO SECURE EACH CORNER OF THE SEAT, ADD WASHER AND NUT AND TIGHTEN UP. COVER NUT WITH BLACK CAP TO FINISH

IMPORTANT:-

Ensure that you are familiar with these assembly instructions prior to commencing assembly.

We will not accept any claims resulting from products that have been wrongly assembled.

Employ safe lifting procedures when handling components.

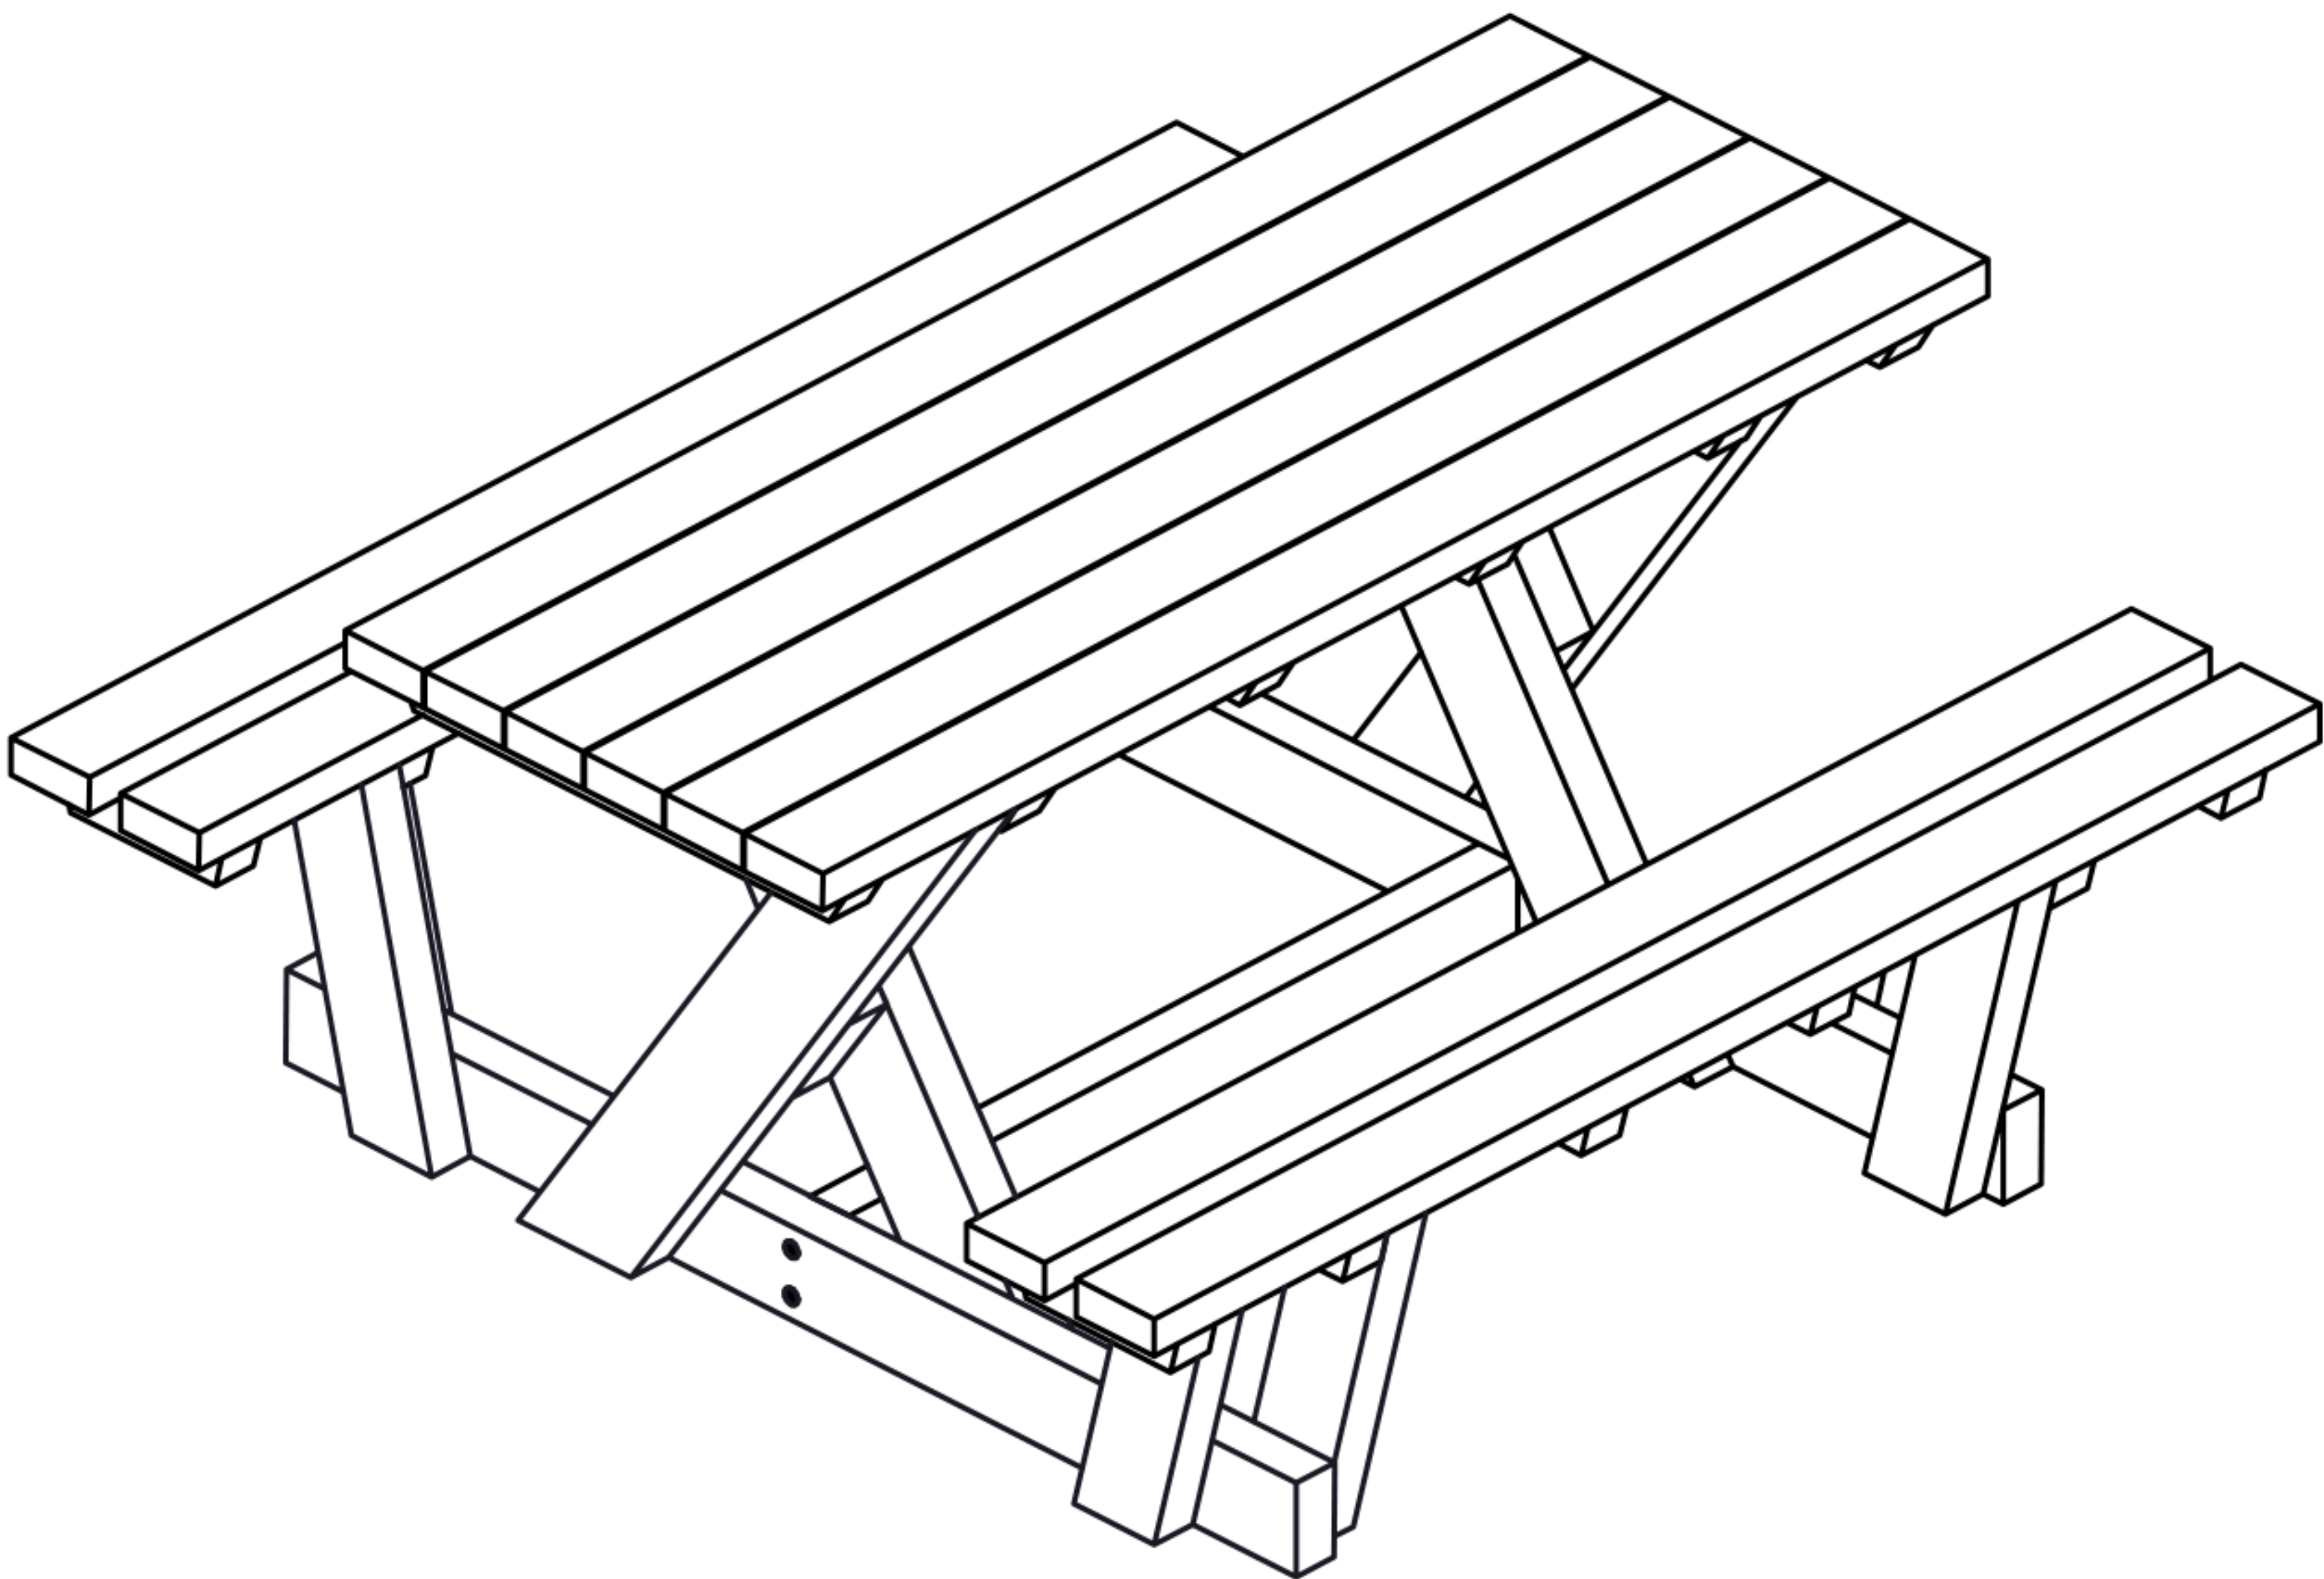

THIS COMPLETES THE TABLE ASSEMBLY

Help and support:-

Please contact us using the telephone number or email address as stated on your shipping documents.