

ARBOPROTECT^{PRO}

B3 Adhesive & Insulation Foam

MULTI-USE FOAM, FLEXIBLE AND AIRTIGHT

ARBOPROTECT Pro B3 Adhesive & Insulation Foam is a one-component, ready to use polyurethane gunfoam for a variety of applications. Application is very convenient and fast with the accompanying special nozzle. Fine cell structure enhances thermal and acoustic insulation properties. Adheres well to most common construction materials.

Main Applications

ARBOPROTECT Pro B3 Adhesive & Insulation Foam is suitable for thermal and sound insulation of buildings, vehicles, vessels, uneven surfaces, insulation repair works and insulating hard to reach places, reducing the impact of thermal bridges and prevention of condensation on cold surfaces.


Key Performance Attributes

- High thermal and acoustic insulation value
- Thickness of insulation layer is freely selectable
- Quick and easy application
- Excellent adhesion to all commonly used building materials
- Good movement capability
- Enhanced UV resistance

Application Instructions

Application conditions

- Air temperature during use: +10 °C to +30 °C. Make sure the ambient temperature stays within this range until the foam has fully cured.
- Can temperature during application: +18 °C to +28 °C, best results at +20 °C.

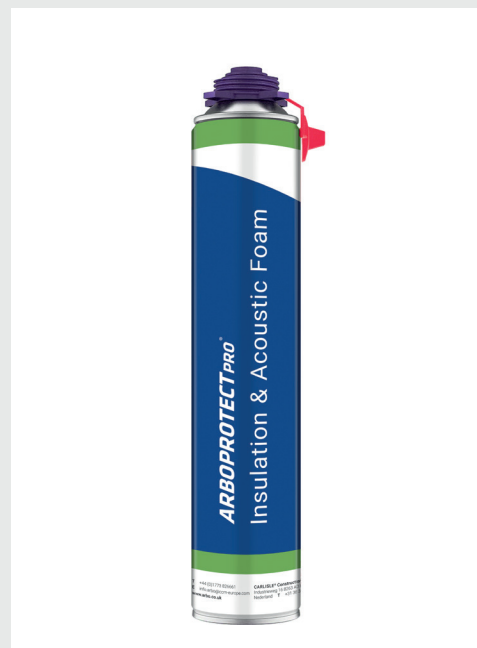

ARBOPROTECT Pro[®] B3 Adhesive & Insulation Foam

Surface preparation

- Remove dust, loose particles and oil stains from the surfaces. Moisten dry substrate to ensure better results.
- Protect adjacent surfaces with paper, plastic film or other suitable material.
- Add additional shield for external applications for protection against rain, wind, etc.

Application method

- Attach the application nozzle to the tip of the foam gun. Shake the can vigorously at least 20 times. Remove the cap. Hold the foam can in upright position with valve up. Screw the can tightly to the gun by holding the gun handle with one hand and turning the can with the other hand. Do not aim the gun at people. Avoid screwing the can to the gun with valve upside down. Do not screw the gun to the can. Do not bend or turn the can during screwing. Rotate the nozzle as needed (for Vertical or horizontal application).
- Hold the can upside down when extruding the foam. Foam output can be adjusted with gun trigger and adjustment screw.
- Apply the foam from distance of approx. 40 cm from the surface. The application distance determines the width of the application area – the shorter the distance, the narrower the application area.
- Maximum thickness of the foam in one layer should not exceed 2 cm.
- If another layer of foam is needed, wait for at least 60 minutes before applying the next layer.
- Number of layers is not limited.
- When applying foam in layers moisten slightly between each layer, but make sure there are no water drops on the surface before applying foam.
- Excess foam can be cut after it has fully cured.

Cleaning

Uncured foam can be removed with acetone.
Cured foam can be removed mechanically.

Storage conditions and shelf life

- Guaranteed shelf life is 12 months from production date if stored in an unopened packaging in a cool and dry place at +5 °C to +30 °C.
- Do not expose to temperature over +50°C, do not keep near heat sources or in direct sunlight.
- Store and transport in upright position. Secure cans before transport.

Safety regulations

- Pressurized canister.
- Use only in well-ventilated areas.
- When using indoors, ventilate the room after application of foam.
- Do not smoke during application!
- Use PPE gear when necessary.
- Keep out of the reach of children.
- See label and safety data sheet (SDS) for more information.

Limitations

- ARBOPROTECT Pro B3 Adhesive & Insulation Foam lacks adhesion to Teflon, polyethylene, polypropylene and silicone surfaces.
- It is not advisable to unscrew the gun from the foam canister intermittently. Foam should be used in a way that the gun is screwed on once.
- Cured foam is less sensitive to UV-light and direct sunlight than other conventional one-component polyurethane foams. It is recommended to cover the cured foam with suitable opaque sealant, filler, paint or other material to ensure lasting quality features.
- Do not cover before foam has fully cured.
- Do not use in places with long-lasting direct contact with water as this reduces thermal insulation properties.
- Spray nozzle is compatible with most foam guns. Always check compatibility before choosing the foam gun.
- Please observe the expiration date.

ARBOPROTECT Pro[®] B3 Adhesive & Insulation Foam

Technical data

| Properties | Value | Unit |
|--|--------|---------------------|
| Tack free time (EN 17333-3) | <30 | min |
| Rise time | <15 | min |
| Fully cured (+23 °C) | 24 | h |
| Post expansion (EN 17333-2) | 100 | % |
| Density | 12-16 | kg/m ³ |
| Short term temperature resistance of cured foam | -50-70 | % |
| Reaction to fire classification (EN 13501-1) | F | |
| Fire class of cured foam (DIN 4102-1) | B3 | |
| Thermal conductivity (EN 12667, EN 17333-5) | 0.033 | W/(m·K) |
| Sound reduction index R _{st,w} (EN ISO 10140) | 62 | dB |
| Output (1 layer) | 1 | m ² /can |

The values specified were obtained at +23 °C and 50% relative humidity, unless otherwise specified. These values may vary depending on environmental factors such as temperature, moisture and type of substrates.

Both the information and the product descriptions contained in this publication have been compiled to the best of our knowledge and belief based on our prior experiences and tests. Claims for compensation may not be derived from the same. We reserve the right to make improvements to our product range, in accordance with our high standards in relation to technical advancement and the progression of quality.



CARLISLE[®] Adshead Ratcliffe & Co. Ltd

United Kingdom Derbyshire T +44 (0)1773 826661
Derby Road | Belper DE56 1WJ E info.arbo@ccm-europe.com www.arbo.co.uk

