

Enquiry form for SINUS buffer tanks

Project name:*

Application:*

- ☐ Heating (up to 110 °C)
☐ Cooling (up to 50 °C)

Manufacturing:*

- ☐ factory standard
☐ PED
 Inspection opening: *
☐ standard manhole 320x 420 mm
☐ standard handhole 100 x 150 mm
☐ with swivel device DN 500
☐ with swivel device DN 600

Pressure:*

- ☐ 6 bar ☐ 10 bar

Volume (no other options possible):*


- ☐ 250 l ☐ 300 l ☐ 400 l
☐ 500 l ☐ 600 l ☐ 750 l
☐ 1,000 l ☐ 1,200 l ☐ 1,500 l
☐ 2,000 l ☐ 2,500 l ☐ 3,000 l
☐ 3,500 l ☐ 4,000 l ☐ 5,000 l
☐ 6,000 l ☐ 7,000 l ☐ 8,000 l
☐ 10,000 l ☐ 12,000 l ☐ 15,000 l
☐ 20,000 l ☐ 25,000 l

Diameter:*

- ☐ DN 450 ☐ DN 600 ☐ DN 800
☐ DN 1000 ☐ DN 1200 ☐ DN 1400
☐ DN 1500 ☐ DN 1600 ☐ DN 1800
☐ DN 2000 ☐ DN 2200 ☐ DN 2400

Please consider that due to a good stratification not all volumes are compatible with the diameter!

*mandatory

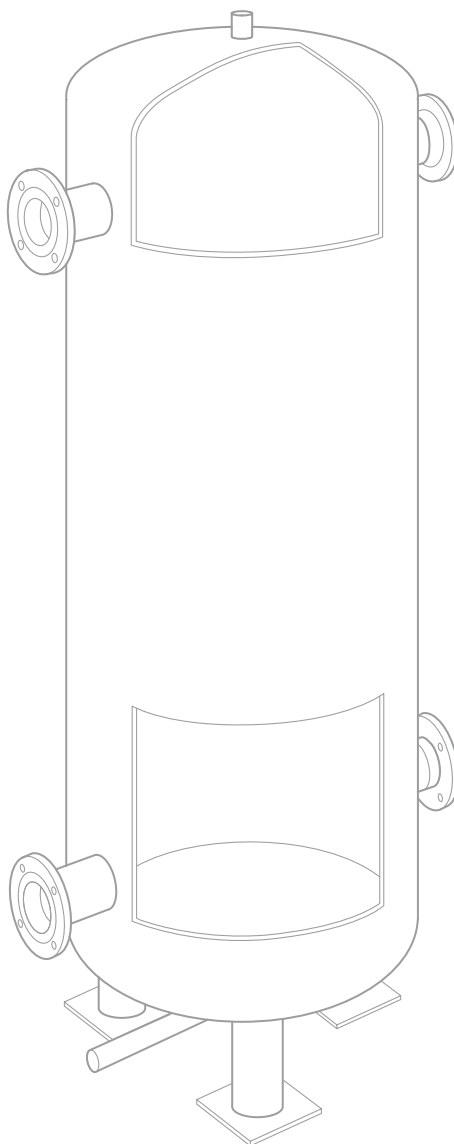

Buffer tanks only possible
in material S235 (black steel)

Stratification plates:

- ☐ 1 ☐ 2 ☐ 3

Possibilities

(Please indicate amounts and dimensions):

Nozzle pipes:


Flanged nozzles:


Diffuser bends:


Threaded nozzles:


Bushings

(e.g. thermometer, manometer, etc.):



Bends:


Options:

- ☐ coating against corrosion AGI Q151
☐ 110 mm insulation polyester fibres (only for heating)
☐ SINUS EasyFixx connection



Start your configuration
with ProSinusX
prosinusx.sinusverteiler.com