


Enquiry form for \$SINUS HydroFixx

Project name:*

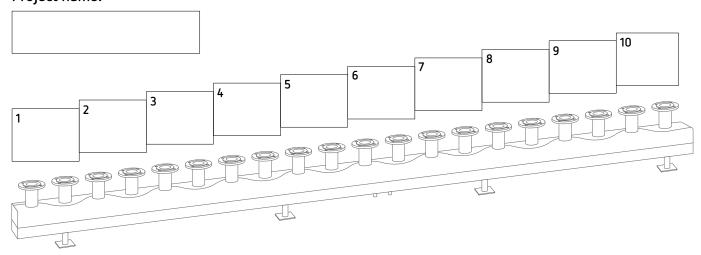

Manifolds:		Accessories:		Options:
Number* Manifold size*		Stand brackets ☐ 270-340 mm ☐ 405-600 mm		☐ Including SINUS EasyFixx (from sizes 180/110)
Manifold length*	mm	Wall brackets		□ FTF-1 (F1 long) = AriWedi, AriEuroWedi, Boa H/W, etc.
Nozzle spacing*	mm	Insulation		□ FTF-14 (F4 long) = AriEuroWedi, BoaCompact, etc.
Flanges PN 6/16*		Name plates		☐ FTF-20 flaps, made by:
Thread/Bushings Make/model Fittings		Drainage channel		☐ KSB Super Compact
Tidic, model Fictings				☐ Gate valves
Power data:		Remarks:		☐ Ball valves
Design pressure*	bar			☐ PUR foam, coarse-grained aluminium
Design temperature*	0°C			☐ PUR foam, galvanised
Temperature difference	K			☐ Mineral wool, galvanised (100 mm)
Volume flow rate*	m³/h			☐ Inside untreated, outside according to AGI Q-151 (for cold)

Start your configuration with ProSinusX prosinusx.sinusverteiler.com