


How to configure a mesh router?


Step 1: Power on the extender router

- Place the WX3100 (Extender) plug in the power adapter (ONLY!)
- Turn on the extender router with the power button shown below
- Then wait 2 minutes for the device to start up

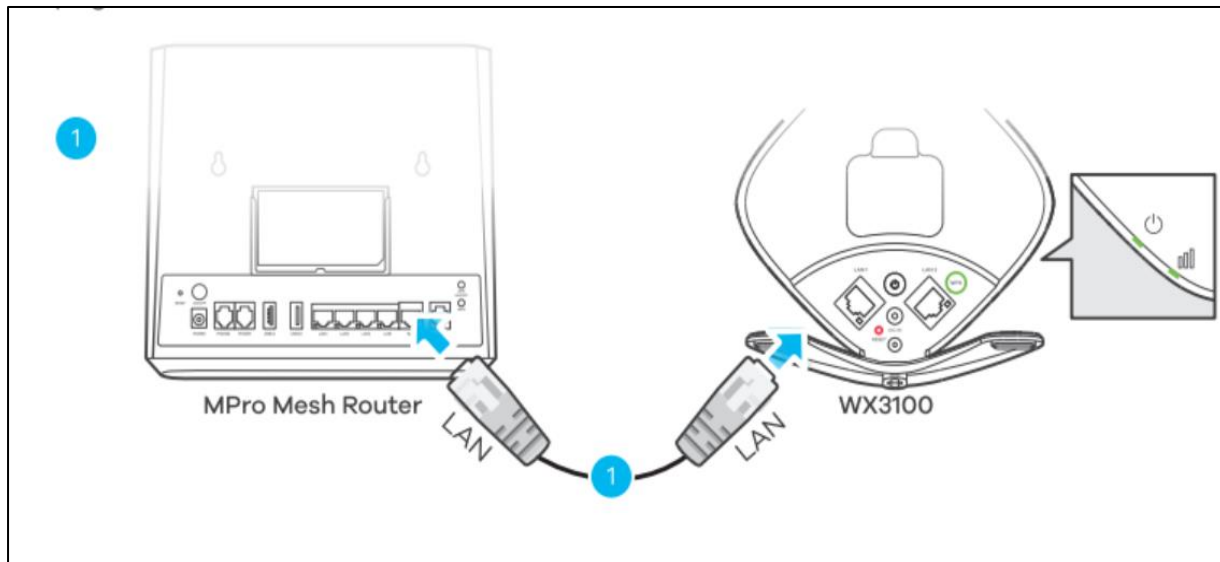

Step 2: Check the Power LED

- After POWER LED turns steady green, connect the Ethernet Cable.
- When it has successfully started up (the POWER LED turns steady green), you can connect an Ethernet cable from the Root Router to the Extender Router.

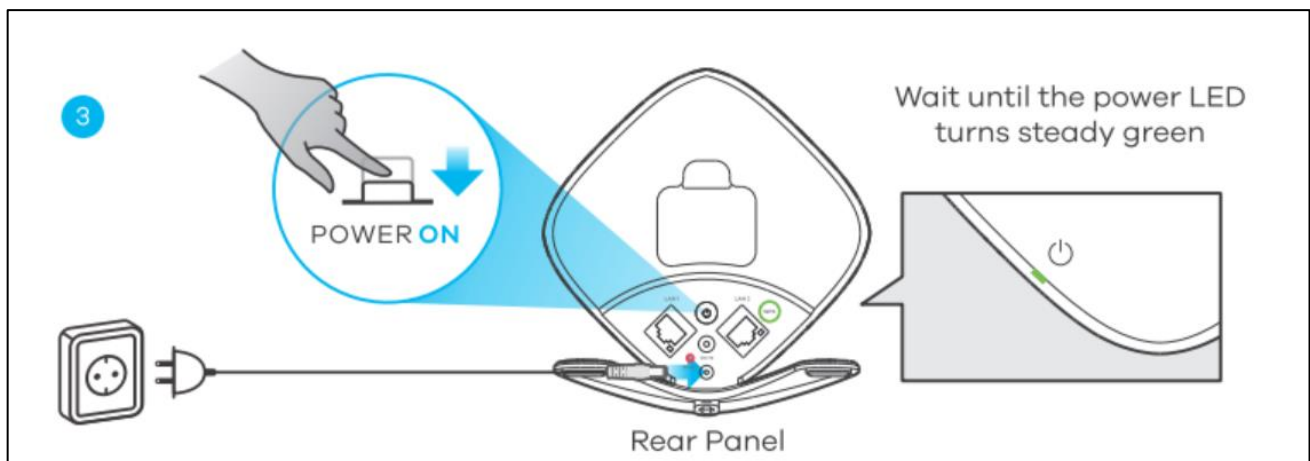


Step 3: Connect the Ethernet Cable

- Connect the Ethernet Cable and wait for the LINK LED light to turn steady green.
- Then connect an Ethernet cable to the WX3100's LAN port and wait until the LINK LED turns steady green.

Step 4: Move the Extender Router

- Unplug the Extender Router and put it where you want to have it.
- Unplug your router (both ethernet and power) and put it where you want and put in the power cable (ONLY!). The router will now mesh wirelessly to the extender router.

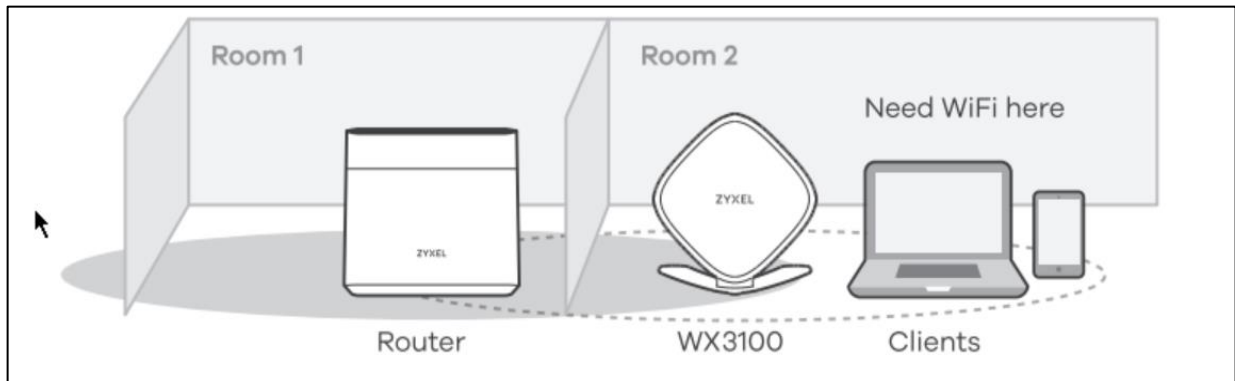

Need help?

If you need help configuring your mesh router, contact our support team by calling us on 0333 014 3131 or message us on [WhatsApp](#).