

LYSAGHT® SMARTDEK®

LYSAGHT

SMARTDEK




BLUESCOPE
LYSAGHT

LYSAGHT® SMARTDEK®

Best Metal Floor Deck Design

SMARTDEK® is a new innovative steel decking profile that brings greater economy and design freedom to building with composite concrete slabs.

It is a unique and proudly to say that our design engineers scoured the around the globe to find the best “W” – profiles in the world. After several advanced examinatiois, our engineers incorporated the best aspects of each profile into new SMARTDEK®.

The profile has been specifically developed for Australian high tensile steels – which makes SMARTDEK® one of the best performing “W” profiles in the world. This profile is designed to meet your requirement availability for diverse building needs. This resulted in a new innovative and optimized shape for SMARTDEK®, having flange stiffeners and deep embossments, which act as web stiffeners, to increase the load carrying capacity. Due to the large depth of the profile, an increase of the flexural rigidity reduces deflections.

SMARTDEK® steel sheets are permanent formwork for a suspended composite concrete slab. SMARTDEK® is a complete structural steel decking system for concrete, masonry or steel frame construction.

The effective cover width is 960mm. In the assembled state, the profile comprises two intermediate male and female ribs for every interlocking side-lap joint.

When concrete hardens, SMARTDEK® acts as the bottom reinforcement of the concrete slab. SMARTDEK® is a complete structural steel decking system for concrete, masonry or steel frame construction.



WHY SMARTDEK®?

1

Research and Development Support

BlueScope Lysaght places great emphasis on product research and testing. All of our LYSAGHT® structural products are subjected to rigorous test such as slip-block test, formwork test including shear and bearing, full scale lab test, composite slab cyclic test, fire rating test, formwork – air pressure test, formwork – four points load test and concentrated load test. These tests are carried out in the labs of the LYSAGHT Technology Center in Chester Hill, Sydney, Australia, to ensure maximum performance and quality of our decking profiles.

2

Product Recommendation and Design to Suit Your Specifications

Working from your project specifications, our engineers will follow up on your requirements and work out a set of calculations and project proposal. A user friendly excel-based software for the design of composite slabs

with LYSAGHT® SMARTDEK® profile will be available to assist a competent engineer in deriving an optimal solution. This software should be used in conjunction with the SMARTDEK® Design and Construction Guide.

3

Quality Assurance – Material and Manufacturing Process

The LYSAGHT® brand name is synonymous with quality and performance. As with all other LYSAGHT® products, SMARTDEK® profiled steel sheets comply with major design standards adopted across Asia.

4


Worldwide Project Experience

Proven track of successful worldwide project from previous profiles (POWERDEK, BONDEK, 2W-DEK, 3W-DEK) on medium to high-rise buildings give us strong knowledge for implementary SMARTDEK®, on every construction.



SMARTDEK® PROFILE & DIMENSION

Typical SMARTDEK® composite section

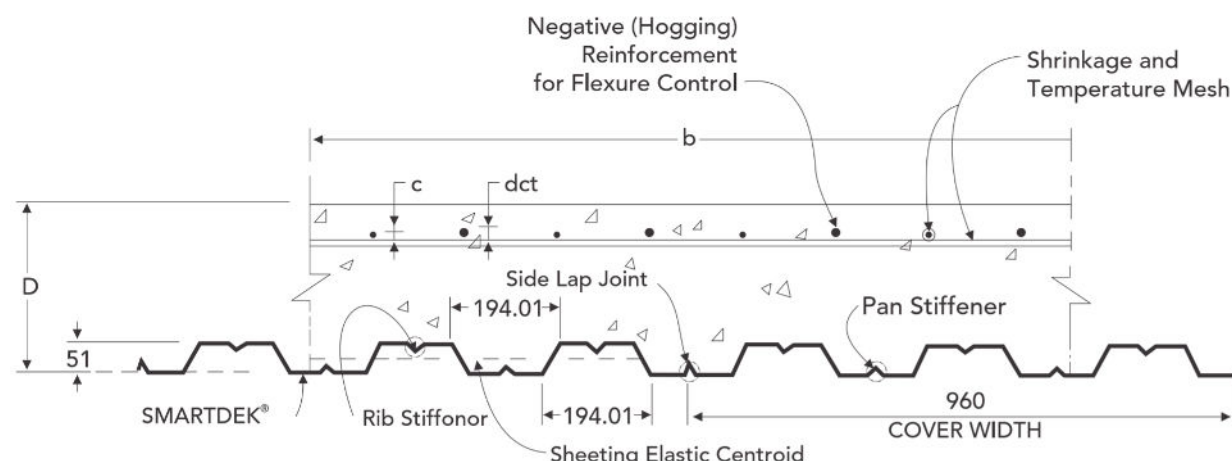

The nominal dimensions of SMARTDEK® profiled steel sheeting are shown in the figure beside.

The effective cover width is 960mm. In the assembled state, the profile comprises two intermediate male and female ribs for every interlocking side-lap joint.

PROPERTIES AND QUALITY

MATERIAL SPECIFICATION

SMARTDEK® profiled steel decking is rollformed from hot-dipped, zinc-coated, chromate-passivated, and high-strength grade steel strip.


Thickness (mm)		Coating Mass (total on both sides)	Yield Strength	Standard
BMT	TCT			
0.70	0.75	Zinc-coated 275 gr/m ²	550 MPa	AS1397-2001
1.00	1.05		550 MPa	JIS G3302 & G3321
1.20	1.25		450 MPa	ASTM 653 & 792
				BS EN 10142 & 10147 & 10215:2000

SECTION PROPERTIES TABLE

	Unit	Symbol	Base Metal Thickness – BMT (mm)		
			0.70	1.00	1.20
Area	mm ² /mm	A	889.69	1269.7	1523.96
Inertia Moment	mm ⁴ /m	Ix ¹	409375.50	584791.00	701979.17
Section Modulus	mm ³ /m	Zx ¹	16974	24357.17	29330.33
Mass	kg/m ²		7.38	10.34	12.33

SMARTDEK® FEATURES & BENEFITS

Feature	Benefit	
	Technical	Commercial
G550	Increase free span	Less support
	Stiffer profile no indentation after support removed	Saving cost for formwork
3 mm Embossment	Better composite action	Optimize reinforcement design
	Able to receive high intensity of loading without additional bottom reinforcement	Optimize overall design
960 mm Effective Width	Fit with most column grid, no waste	Saving cost for material waste
		Less on-site cutting needed, improve safety
MEGAFLOOR® Software	Powerful tool to design decking as formwork and composite	Less time and resources to design composite slab

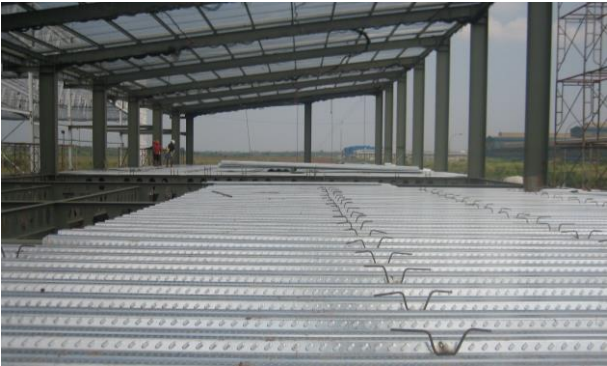


MEGAFLOOR® SOFTWARE

SMARTDEK® is supported by excellence and PC based design software.

MEGAFLOOR® software is an ultimate tool to design decking as formwork and composite for optimum result using empirical equation.

Becomes ultimate tool to design decking as formwork, composite and fire.

Fast in designing composite slab. Less resource for planning the usage of SMARTDEK®.

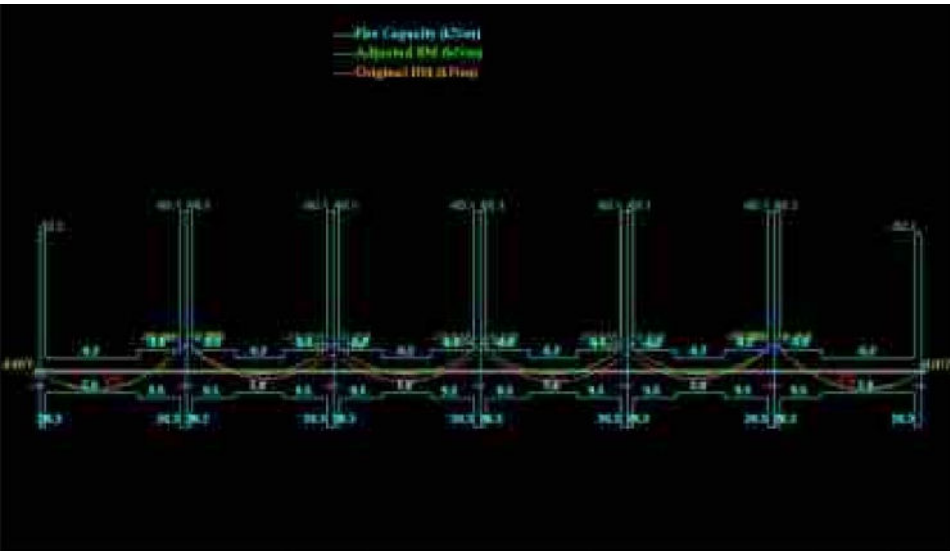




INSTALLATION AND PROPERTIES


SMARTDEK® SPAN TABLE (FORMWORK STAGE)

Span Type		Single			Continuous End			Continuous Interior		
BMT		0.70	1.00	1.20	0.70	1.00	1.20	0.70	1.00	1.20
Slab Thickness (mm)	100	2380	2740	2800	2640	3410	3200	2640	3280	3200
	110	2310	2650	2780	2550	3320	3110	2550	3170	3110
	120	2230	2570	2700	2470	3230	3020	2470	3070	3020
	130	2170	2500	2620	2400	3150	2930	2400	2990	2930
	140	2110	2430	2560	2330	3080	2850	2330	2900	2850
	150	2060	2370	2500	2270	3000	2770	2270	2800	2770
	160	2010	2330	2440	2210	2930	2700	2210	2710	2700
	170	1960	2260	2390	2160	2850	2640	2140	2630	2640
	180	1920	2230	2340	2110	2790	2580	2080	2550	2580
	200	1840	2150	2180	2030	2670	2470	1870	2300	2470

Installation on Concrete Frame Construction

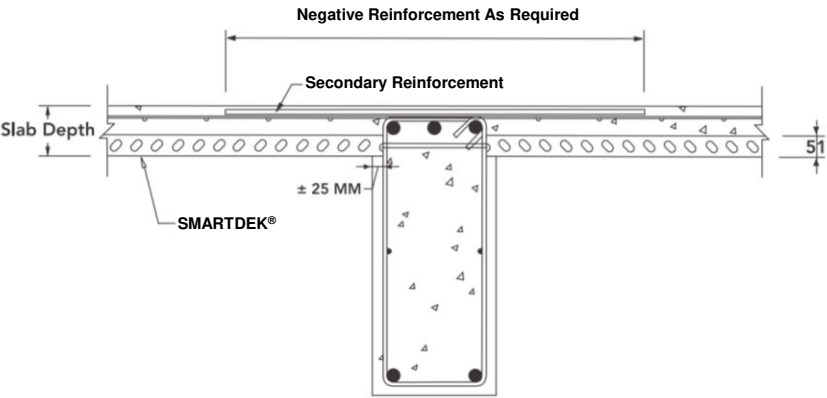

Installation on Steel Frame Construction

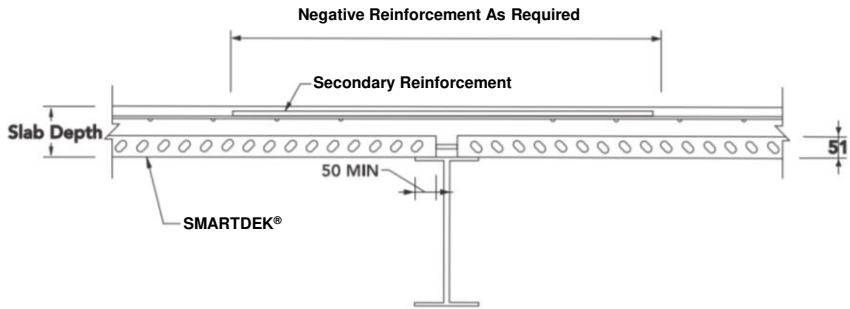

SMARTDEK® INSTALLATION PROCESS



1 Open SMARTDEK® sheet bundles



2 Place temporary support if required



3 Trim SMARTDEK® sheets if required



4 Place on steel or concrete beam



5 Fix SMARTDEK® to steel or concrete beam if required



3 Trim SMARTDEK® sheets if required



7 Fix steel edge form



8 Place reinforcement



9 Pour concrete



TEST, FEATURE AND BENEFIT

INTERNATIONAL TEST

Formwork Test, Composite Test & Fire Test




Formwork – Point Load



Formwork – Air Pressure Test



Composite – Slip Block Test

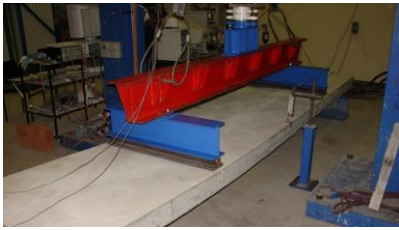

Composite – 5000 Cyclic Load Test



Fire Test – BRANZ



Fire Test – Victoria University

LOCAL TEST


AT BANDUNG INSTITUTE OF TECHNOLOGY (ITB)

Formwork Test, Composite Test, Fire Test & Vibration Test

Vibration Test



Fire Test

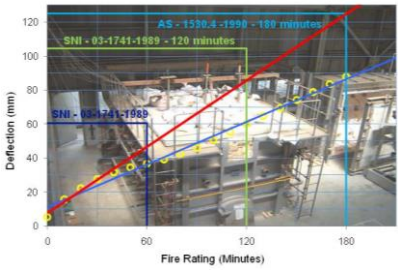

PROJECT REFERENCES



Blok M Square



Citra Mall Batam



Pacific Place Office Tower



Ministry of Religious Affair



Kievit Factory Salatiga



Central Park Outdoor



Arcadia Office Building



Yarn Factory Sidoarjo



Summarecon Mall Serpong



IKEA Alam Sutera



Omni International Hospital Serpong

OTHER PROJECTS

Shopping Center: Blok M Square, Summarecon Mall Serpong, Summarecon Mall Bekasi, Citra Mall Batam, Central Park, IKEA Alam Sutera, Trans Studio Bandung | **Office:** Pacific Place Office Tower, Eminence Dharmawangsa, Gudang Garam Tower, ANTAM Tower, WTC II Sudirman Tower, Ministry of Religious Affair | **Industrial:** KIEVIT Factory Salatiga, Yarn Factory Sidoarjo | **Facilities:** OMNI International Hospital Serpong, Sepinggan International Airport Balikpapan

PRODUCT DESCRIPTIONS

All descriptions, specifications, illustrations, drawings, data, dimensions and weights contained in this catalogue, all technical literature and websites containing information from Lysaght are approximations only. They are intended by Lysaght to be a general description for information and identification purposes and do not create a sale by description. Lysaght reserves the right at any time to:

- (a) supply Goods with such minor modifications from its drawings and specifications as it sees fit; and
- (b) alter specifications shown in its promotional literature to reflect changes made after the date of such publication.

DISCLAIMER, WARRANTIES AND LIMITATION OF LIABILITY

- This publication is intended to be an aid for all trades and professionals involved with specifying and installing Lysaght products and not to be a substitute for professional judgement.
- Terms and conditions of sale available at local Lysaght sales offices.
- Except to the extent to which liability may not lawfully be excluded or limited, BlueScope Steel Limited will not be under or incur any liability to you for any direct or indirect loss or damage (including, without limitation, consequential loss or damage such as loss of profit or anticipated profit, loss of use, damage to goodwill and loss due to delay) however caused (including, without limitation, breach of contract, negligence and/or breach of statute), which you may suffer or incur in connection with this publication.

® product and product brand names are registered trademarks and ™ product and product brand names are trademarks of BlueScope Steel Limited.

The LYSAGHT® range of products is exclusively made by or for BlueScope Steel Limited.

BlueScope and the BlueScope brand mark are registered trademarks of BlueScope Steel Limited.



Our Office & Factory:

Bekasi

Jalan Irian blok DD2-2, Kawasan Industri MM2100, Cibitung, Bekasi, JAWA BARAT

Surabaya

Jalan Rungkut Industri IV No.24, Kawasan Industri SIER, Surabaya, JAWA TIMUR

Medan

Jalan Pulau Palu No.28, Kawasan Industri Medan Tahap I, Medan, SUMATERA UTARA



Lysaght.Indonesia@bluescope.com



WWW.LYSAGHTASEAN.COM

Follow Us!



[LYSAGHTID](#)



[NS BlueScope Lysaght Indonesia](#)

