



HEMOMATIK Sweden		Liquid Level Switch, SUS-316	Art.nr. SUB-C28X-3M	
		G1" adjustable compression fitting	Drawing nr.	Rev.
Approved	A.N. 240419	Scale 1:1	Submersible PUR-cable	
			Date 240419	Sign. AN
			Rev. date	

SUBVAKT

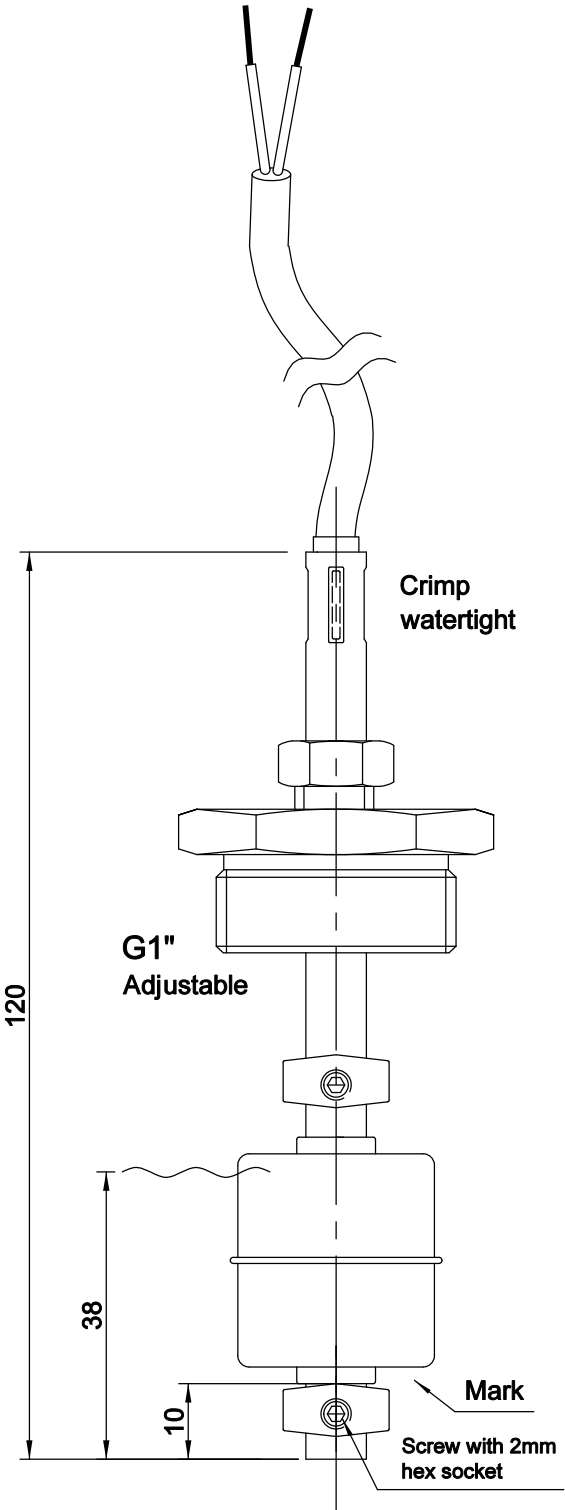

NO NC
mark down mark up

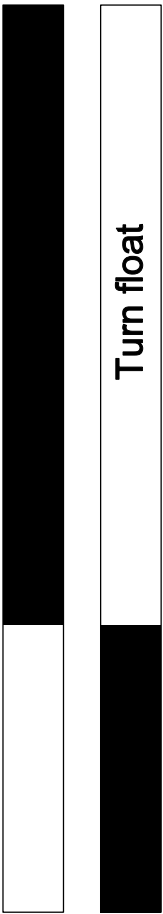

FEATURES
Float liquid level sensor with submersible cable. REED-technology without own power consumption.

MATERIALS
Full INOX: All metal parts in SUS-316
Probe: Ø8x120mm, SUS-316
Float Ø28mm: SUS-316, density 0,75
max pressure 10bar
Fitting G1": SUS-316
Temp. -20...+85°C

Cable: 3m PUR, 2x 0,50mm²
Other cable length on request (KABL500)

CONTACT FUNCTION
NO= Open kontakt at low level, close rising
Turn the float to invert the signal to NC

PROTECTION DEGREE
IP68

ELECTRICAL DATA

Contact rating *	70 VA
max voltage	3-48V
max current	1,5 A

* = resistive load

 = Switch closed
 = Switch open