


HEMOMATIK SWEDEN	Scale 1:1	NIVAKT Liquid level switch	Art.no. HM-D22-SPS	
		with expanding gasket	Drawing no. HM-D22-SPS	Rev. 0
Approved			Date 220321	Sign. MEM
			Rev.date	

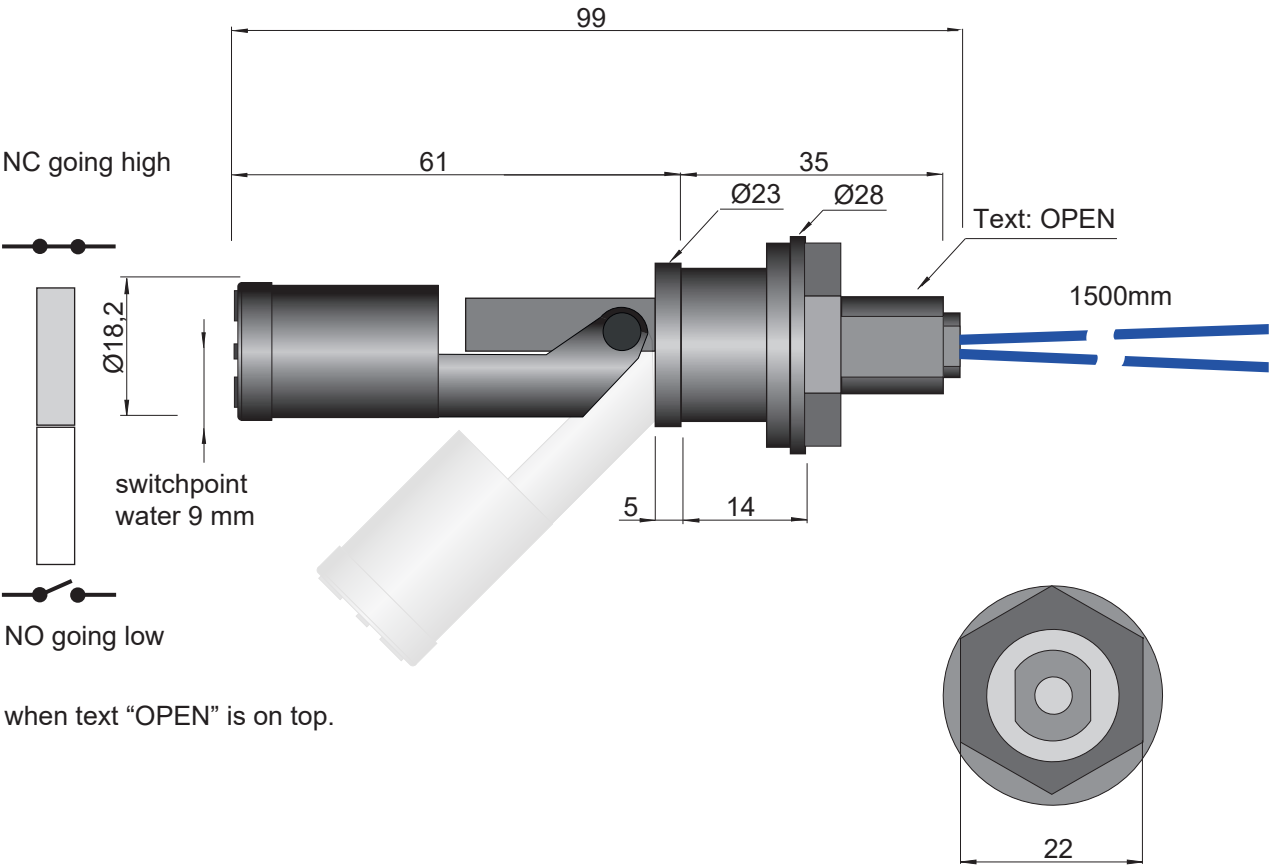

INSTALLATION

Hole diameter max 22,6 mm

Setting Torque: 1,2 Nm

(wall thickness 1 mm)

No sharp edges

Cable	PVC AWG22, UL STYLE 1569
Stem, Float	PPS, 40 % glass fibre reinforced
Nut	PA6, 30 % glass fibre reinforced
Gasket	Silicon
Operating temp	-25...90°C
Contact rating*	50W
max voltage	250 VAC / 200VDC
max current	1 A
Protection degree	IP68, submersed parts
	IP54, general
max pressure	5 bar

*= resistiv load