


HEMOMATIK SWEDEN	Scale 1:1	NIVAKT Liquid level switch	Art.no. HM-D22-SPS-2M
		with expanding gasket	Drawing no. HM-D22-SPS-2M
Approved			Rev. 0
			Sign. MEM
			Rev.date

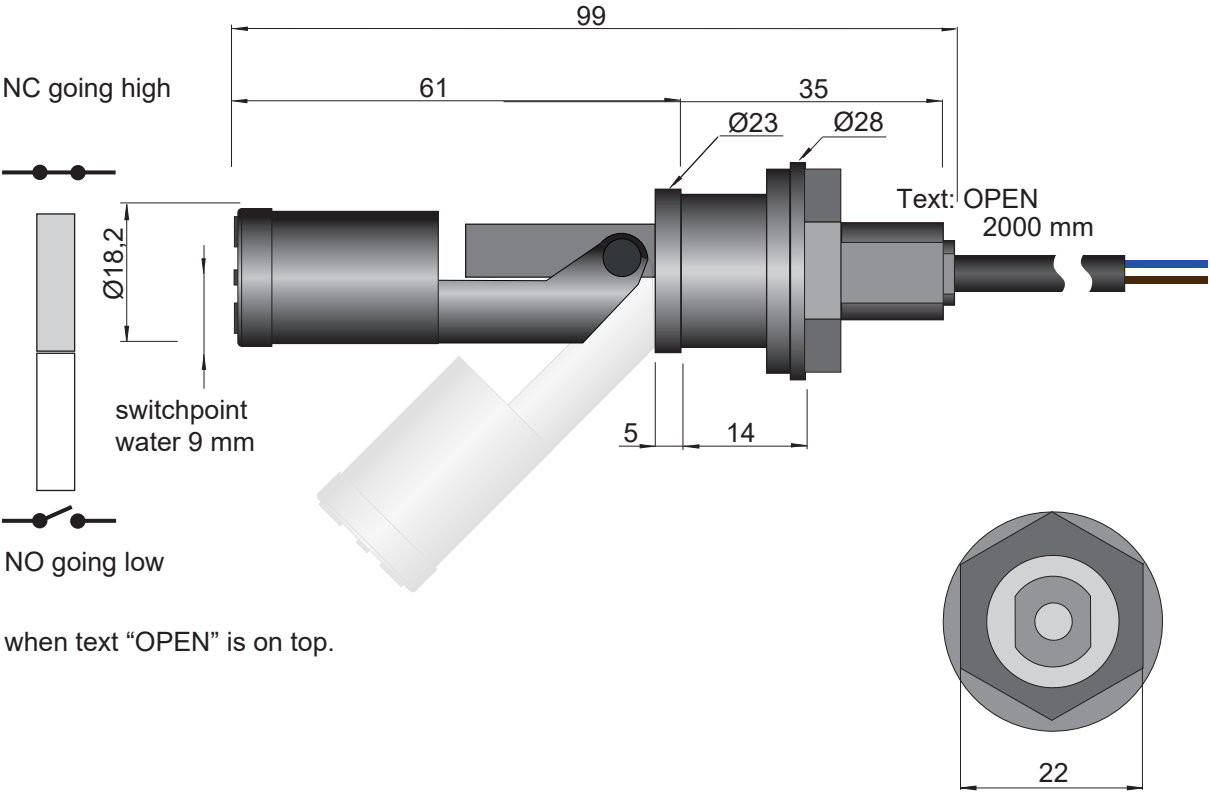

when text "OPEN" is on top.

INSTALLATION

Hole diameter max 22,6 mm
Setting Torque: 1,2 Nm
(wall thickness 1 mm)
No sharp edges

Cable	PVC 2x0,5mm ²
Stem, Float	PPS, 40 % glass fibre reinforced
Nut	PA6, 30% glass fibre reinforced
Gasket	Silicon
Operating temp	-25...90°C
Contact rating*	50W
max voltage	250 VAC / 200VDC
max current	1 A
Protection degree	IP68, submersed parts
	IP54, general
max pressure	5 bar

*= resistiv load