


HEMOMATIK Sweden		Liquid Level Switch	Art.nr. SUB-A28X-3M	
		G1" adjustable fitting, POM-C	Drawing nr.	Rev.
Approved	A.N. 240613	Scale 1:1	Date 240613	Sign. AN
Submersible PUR-cable			Rev. date	


SUBVAKT



NO NC
mark down mark up

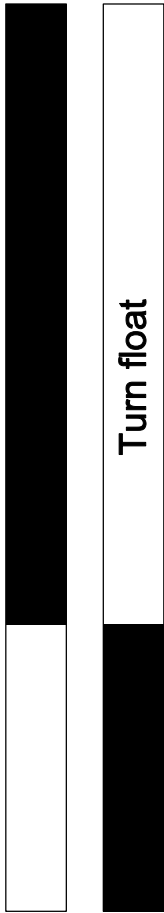

 = Switch closed
 = Switch open

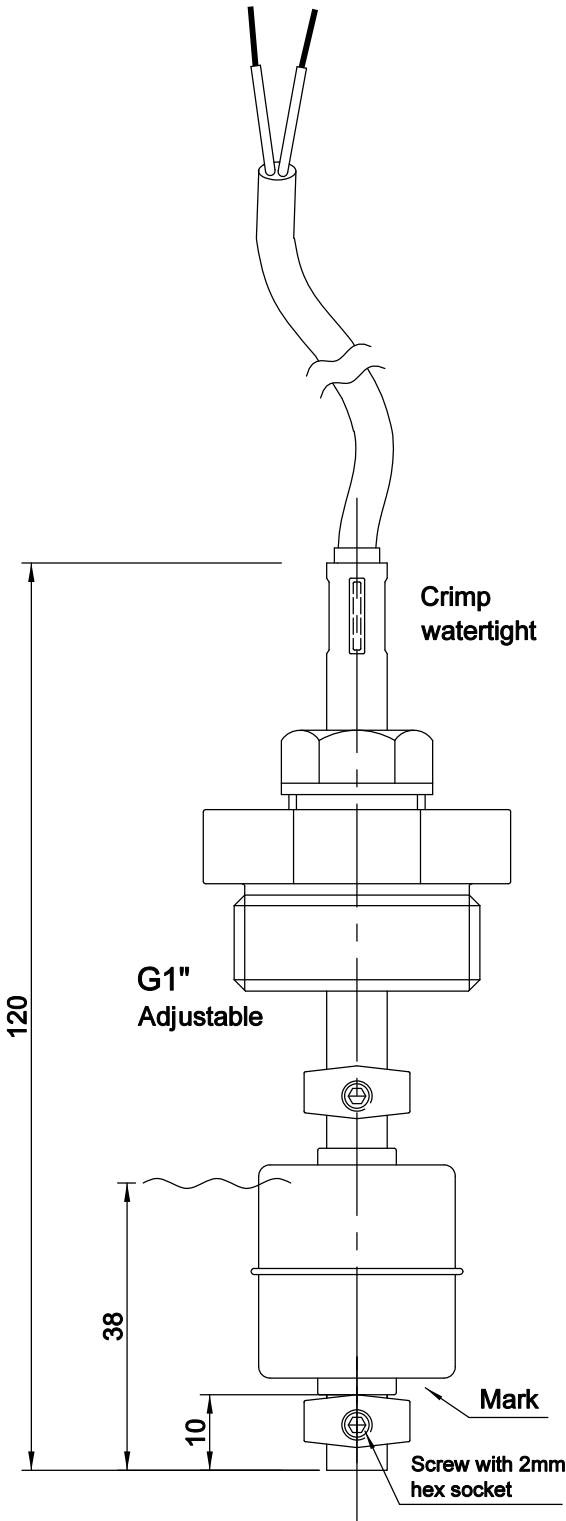

FEATURES
Float liquid level sensor with submersible cable. REED-technology without own power consumption.

MATERIALS
Probe: Ø8x120mm, SUS-316
Float Ø28mm: SUS-316, density 0,75
Fitting G1": POM C
Temp. -20...+85°C

Cable: 3m PUR, 2x 0,50mm²
Other cable length on request (KABL500)

CONTACT FUNCTION
NO= Open kontakt at low level, close rising
Turn the float to invert the signal to NC

PROTECTION DEGREE
IP68

ELECTRICAL DATA	
Contact rating *	70 VA
max voltage	3-48V
max current	1,5 A

* = resistive load