


HEMOMATIK Sweden		Liquid Level Switch	Art.nr. SUB-MW28X-3M	
		Pendant switch with weight and submersible	Drawing nr.	Rev.
Approved	A.N. 240611	Scale 1:1	PUR-cable	Date 240611
			Rev. date	Sign. AN


SUBVAKT



NO NC
mark down mark up

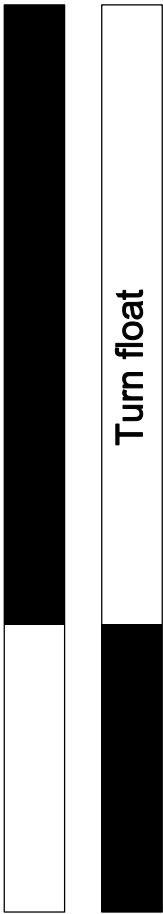

 = Switch closed
 = Switch open

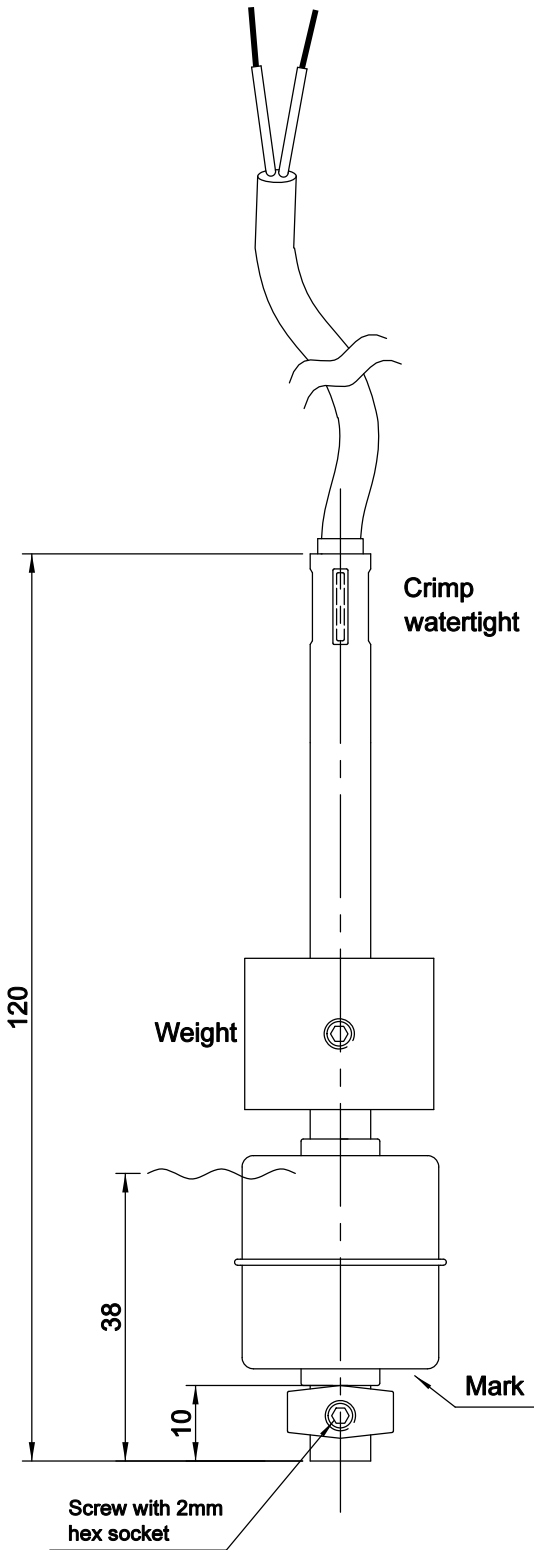

FEATURES
Float liquid level sensor with submersible cable. REED-technology without own power consumption.

MATERIALS
Probe: Ø8x120mm, SUS-316
Float Ø28mm: SUS-316, density 0,75
Weight: Ø25x20mm, SUS-303
Temp. -20...+85°C

Cable: 3m PUR, 2x 0,50mm²
Other cable length on request (KABL500)

CONTACT FUNCTION
NO= Open kontakt at low level, close rising
Turn the float to invert the signal to NC

PROTECTION DEGREE
IP68, submersible max 30m

ELECTRICAL DATA	
Contact rating *	70 VA
max voltage	3-48V
max current	1,5 A

* = resistive load