



HMCHI Series

The ultimate solution for demanding level control. Multi-function level switches in custom lengths, delivering outstanding flexibility.

- DIN connector, IP67
- Adjustable compression fitting G1"
- Selectable switch point lengths and contact functions*



HM 2511

Sensors with REED technology without power consumption, manufactured with the highest quality in our ISO-certified factory in Roslagen, Sweden.

General description:

HMCHI. The float level switches are available with up to two functions in the same unit. It can also be combined with an overtemperature protection. Suitable for oil and other non aggressive liquids.



Construction:

Adjustable compression fitting, when the nut is tightened, the coupling is fixed to the probe. Angled connector EN175301-803 style A (former DIN 43650-A) that can be mounted in four different directions. Screw terminals for mounting your own cable. Protection class IP67. Probe in brass, floats in NBR.

* We manufacture the sensor in desired lengths. Specify switch points length (mm) and contact function when ordering.

O : NO, open at low level, closes rising

S : NC, closed at low level, opens rising

V : NO/NC, change-over

T : Overtemperature protection. NC, opens rising at 70°C ±5

Options, special on request:

Overtemperature protection with other switching temperature and smaller hysteresis.



Note! Read this instruction before installation and use

Protective earth





2 1 3

Opens above 70°C.

Temperature switch in series with level, the circuit is open if any switch is activated.

■ = Switch closed

□ = Switch open

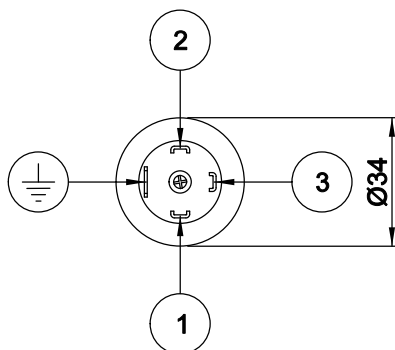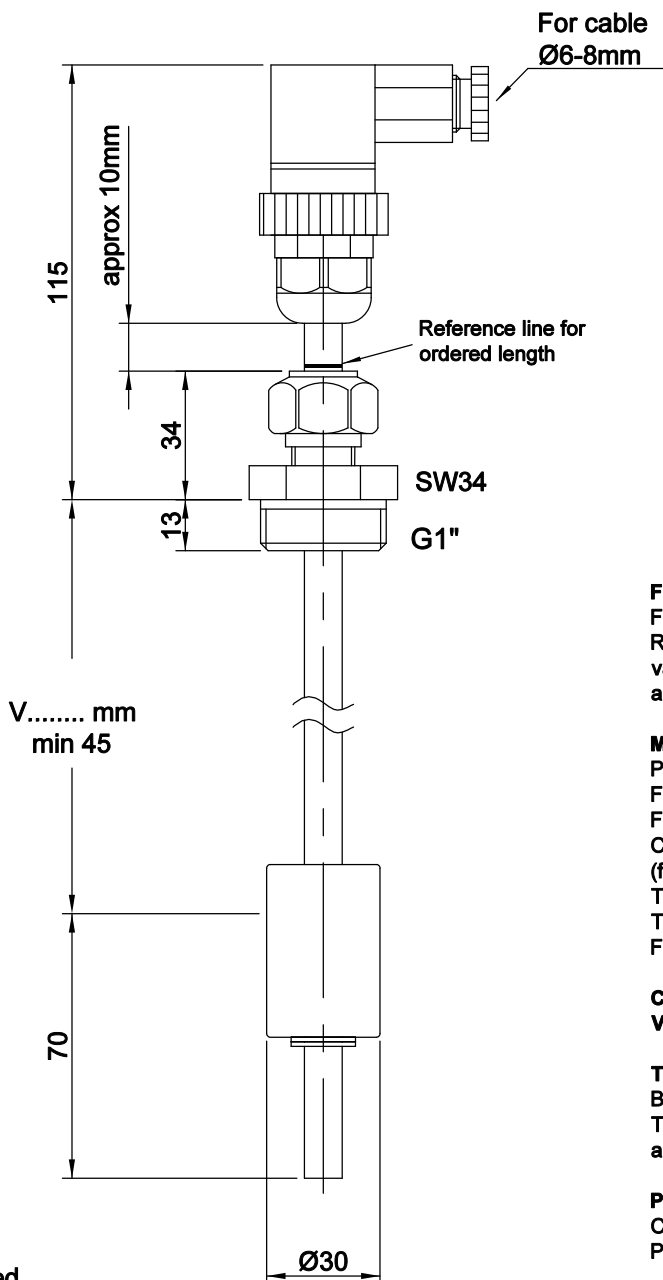

FEATURES

Float liquid level sensor with REED-technology to activate pumps or valves via relays or PLC. Suitable for oil and other non aggressive liquids

MATERIALS

Probe : Brass
Float : NBR S.G. 0,3
Fitting G1" : Brass
Connector : EN175301-803 style A (former DIN 43650-A)
Temp. media : -20...+100°C
Temp. ambient : -20...+70°C
For use 0-5000m above MSL

CONTACT SYMBOLS

V = change over

TEMPERATURE SWITCH

Built in over-temperature protection std. T (T70). NC, open above 70°C ±5 (reset at approx 50°C)

PROTECTION DEGREE

Connector : IP67
Probe : IP68

INSTALLATION

Adjustable compression fitting, when the nut is tightened, the coupling is fixed to the probe.

ELECTRICAL MAX DATA

Contact rating *	60 VA
Voltage	3-230 V AC/DC DC to 60Hz
Current	1 A

* = resistive load

WARNING! If no protective earth is connected to the sensor, the supply voltage must not exceed 48V AC/DC