

HEMOMATIK Sweden		Liquid Level Switch. SUS-316	Art.nr. SUB-H28X-3M	
		G3/8" compression fitting with bracket	Drawing nr.	Rev.
Approved	A.N. 241018	Scale 1:1	Date 241018	Sign. AN
Submersible PUR-cable			Rev. date	

SUBVAKT





FEATURES
Float liquid level sensor with submersible cable.
REED-technology without own power consumption.

MATERIALS
Probe: Ø8x120mm, SUS-316
Float Ø28mm: SUS-316, density 0,75
G3/8" compression fitting & nut: SUS-316
Mounting bracket: 1.4301
Temp. -20...+85°C

Cable: 3m PUR, 2x 0,50mm²
Other cable length on request (KABL500)

NO **NC**
mark down mark up

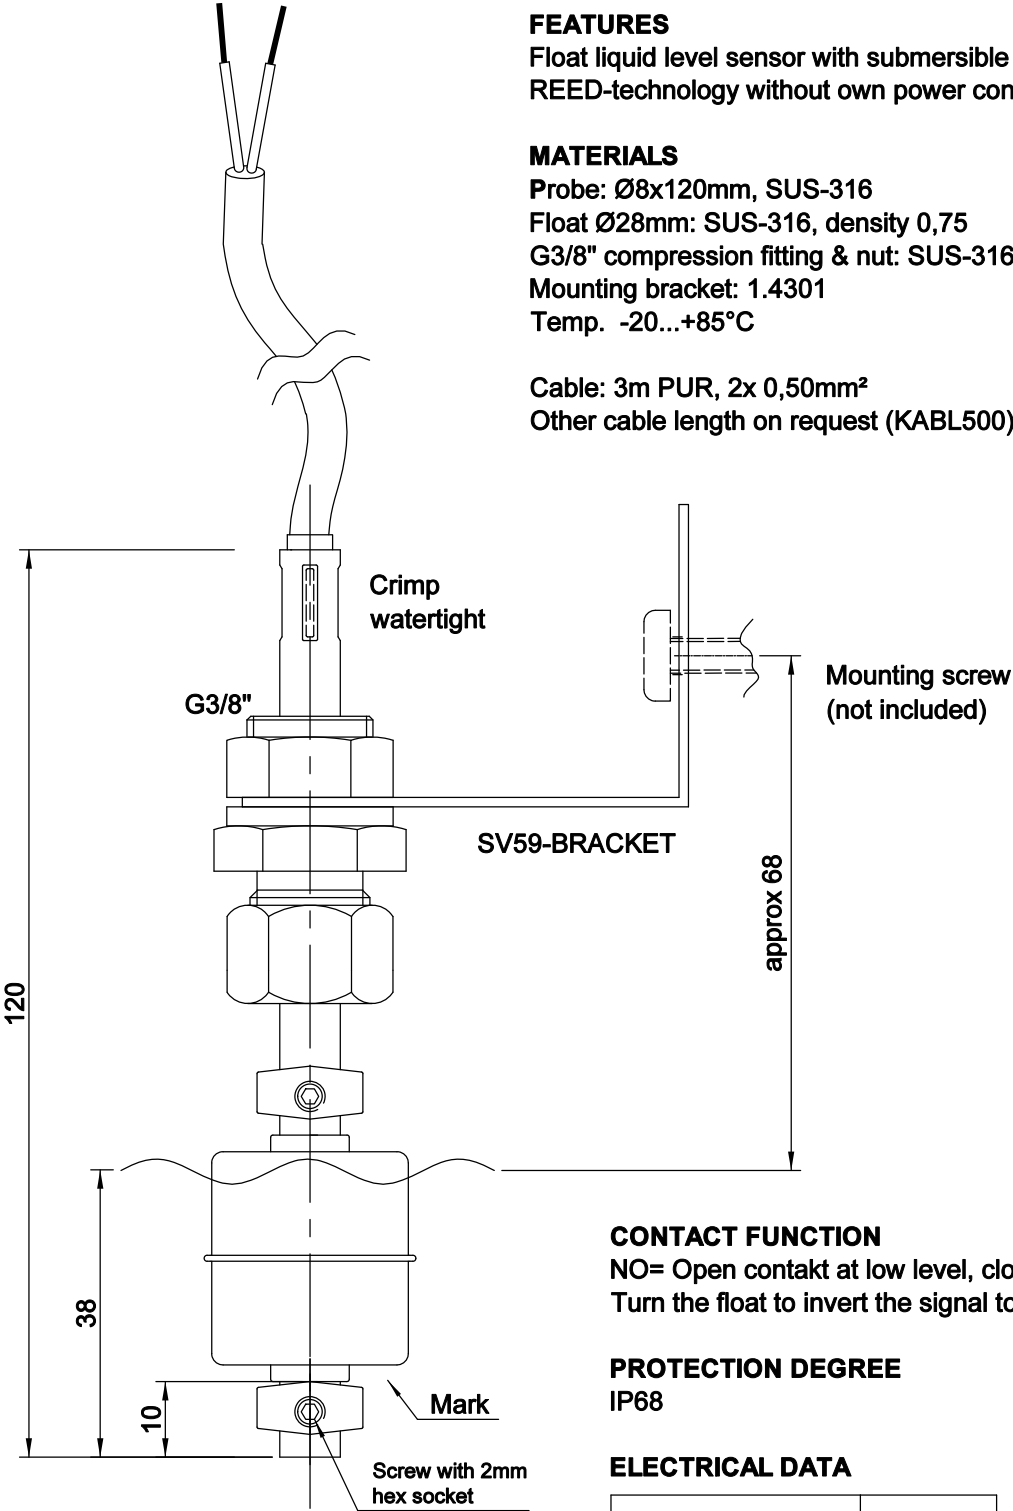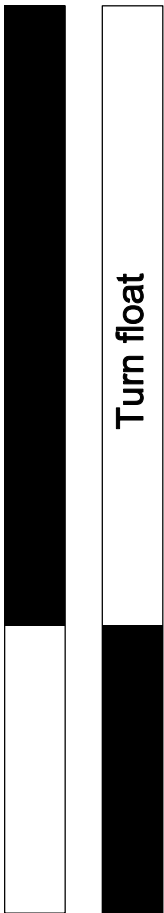

CONTACT FUNCTION
NO= Open kontakt at low level, close rising
Turn the float to invert the signal to NC

PROTECTION DEGREE
IP68

ELECTRICAL DATA

Contact rating *	70 VA
max voltage	3-48V
max current	1,5 A

 = Switch closed
 = Switch open

* = resistive load