

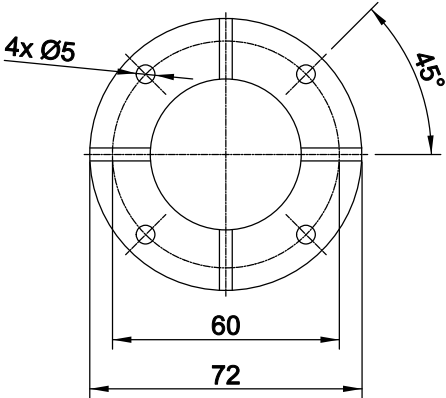


HEMOMATIK Sweden		Liquid Level Switch, SUS-316		Art.nr. SUB-WQ28X-3M+F	
		Pendant switch with weigth and submersible		Drawing nr.	Rev.
Approved	A.N. 240619	Scale	1:2	Date	240619
PUR-cable. Flange and G1"				Rev. date	Sign. AN

SUBVAKT

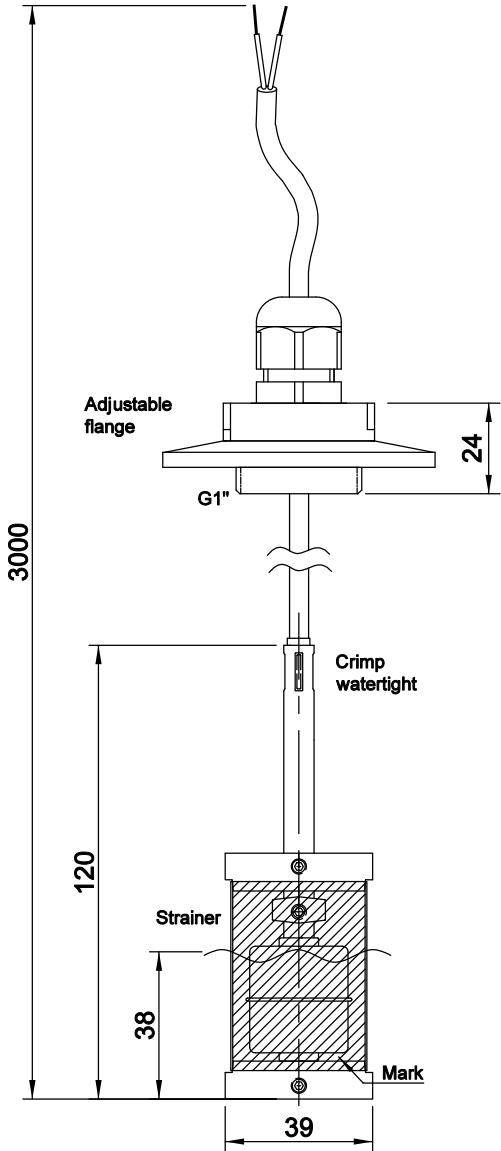

NO mark down NC mark up

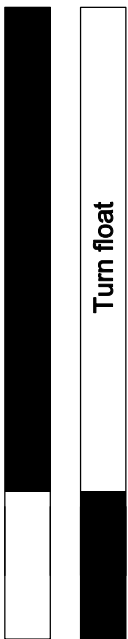

Incl. SUB-OPTION+F
Flange fitting is delivered as a seperate part.

FEATURES
Float liquid level sensor with submersible cable. REED-technology without own power consumption.

MATERIALS
Probe: Ø8x120mm, SUS-316
Float Ø28mm: SUS-316, density 0,75
Protection weights: SUS-316
Strainer: SUS-304, mesh width 0,5mm
Temp. -20...+85°C

Cable: 3m PUR, 2x 0,50mm²
Other cable length on request (KABL500)

CONTACT FUNCTION
NO= Open kontakt at low level, close rising
Turn the float to invert the signal to NC

PROTECTION DEGREE
IP68, submersible max 30m

ELECTRICAL DATA

Contact rating *	70 VA
max voltage	3-48V
max current	1,5 A

* = resistive load

■ = Switch closed
□ = Switch open