Specification | Fiche | EU Label | UK Label

Product Specification

Product Code: TRSMVH-0180SFC

Item Description: 180L STEL IND HG SLM

C

- Manufactured from high grade Duplex stainless steel
- Fitted with a plastic T & P outer casing and colour coded tapping collars
- Heat Pump Ready

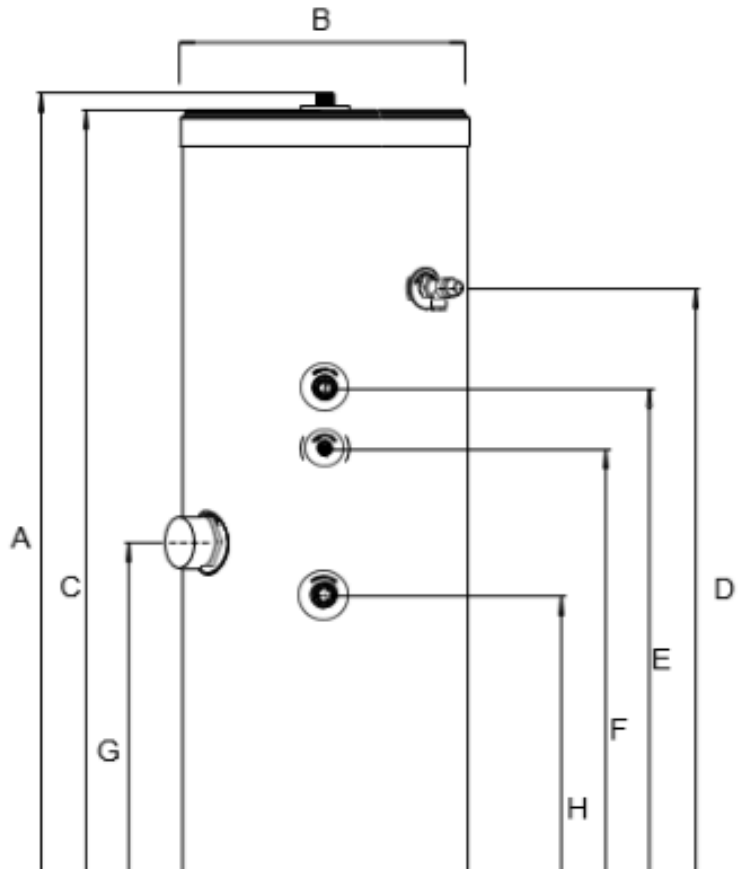

Stelflow

Product Specification

Operating pressure (Bar)	7	**Safety valve temp** (C)	
Tested to standard	BS EN 12897:2016	**Warranty terms** (Year)	
No heat exchangers	1	**Heat loss**	
Coil 1 rating (kW)	27.3	**Coil 1 surface area** (m²)	
Coil 1 max prim pressure (Bar)	6	**Coil 1 resistance** (Bar)	

Dimensions

A (mm)	1746
B (mm)	475
C (mm)	1718
D (mm)	1303
E (mm)	993
F (mm)	893
G (mm)	738
H (mm)	651
I (mm)	162



SPECIFICATION

A	Length (Hot Water Outlet (22r
B	Diameter
C	Height (Exc. Hot Water Outlet
D	T&P Relief Valve (1/2" BSP)
E	Coil Return (1" Fe)
F	Thermostat Pocket
G	Immersion Heater (1 3/4 "BSP)
H	Coil Flow (1" Fe)
I	Cold Feed Inlet (22mm Comp)

Test Standard: BS EN 12897:2016

Joule UK
Unit 3, Leftfield Park, Park Road,
Pontefract, West Yorkshire,
WF8 4PS, UK

Joule Irela
Unit 407 N
Cappagh R
Blanchards
Dublin