Specification | Fiche | EU Label | UK Label

Product Specification

Product Code: TRSMVH-0210SFC

Item Description: 210L STEL IND HG SLM

C

- Manufactured from high grade Duplex stainless steel
- Fitted with a plastic T & P outer casing and colour coded tapping collars
- Heat Pump Ready

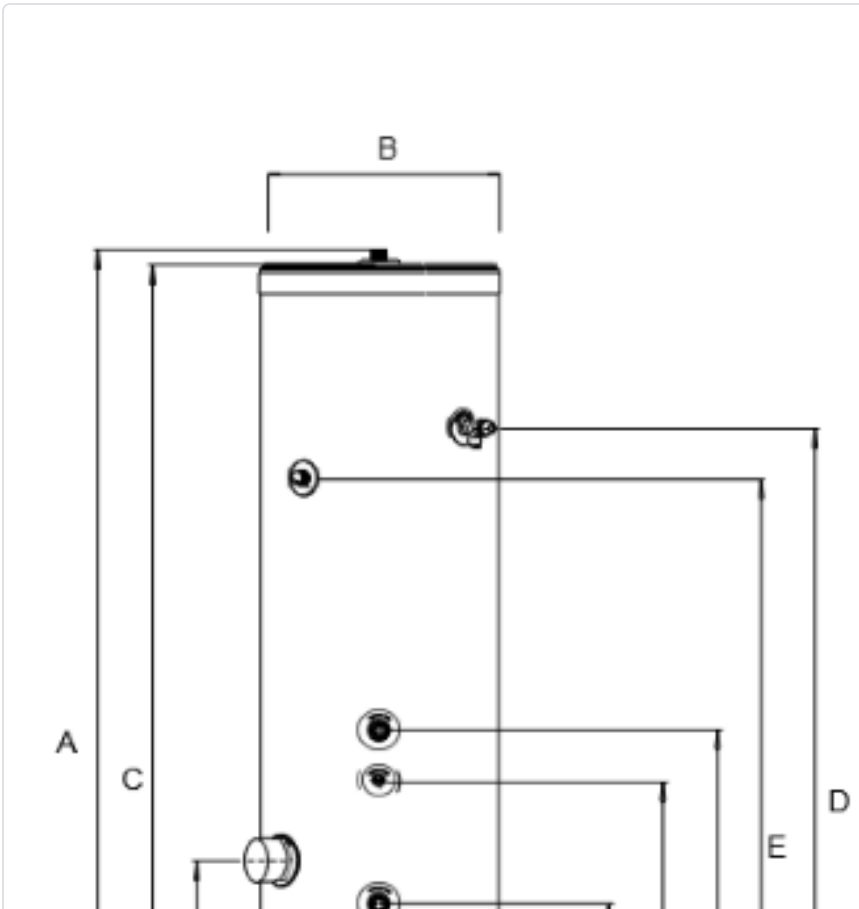

Stelflow

Product Specification

Operating pressure (Bar)	7	**Safety valve temp** (C)	
Tested to standard	BS EN 12897:2016	**Warranty terms** (Year)	
No heat exchangers	1	**Heat loss**	
Coil 1 rating (kW)	27.8	**Coil 1 surface area** (m²)	
Coil 1 max prim pressure (Bar)	6	**Coil 1 resistance** (Bar)	

Dimensions

A (mm)	1958
B (mm)	475
C (mm)	1930
D (mm)	1608
E (mm)	1508
F (mm)	1012
G (mm)	912
H (mm)	757
I (mm)	670
J (mm)	162



SPECIFICATION

A	Length (Hot Water
B	Diameter
C	Height (Exc. Hot W
D	T&P Relief Valve (1
E	Secondary Outlet (
F	Coil Return (1" Fe)
G	Thermostat Pocket
H	Immersion Heater (
I	Coil Flow (1" Fe)
J	Cold Feed Inlet (22

Test Standard: BS EN 12897:2016

Joule UK
Unit 3, Leftfield Park, Park Road,
Pontefract, West Yorkshire,
WF8 4PS, UK

Joule Irela
Unit 407 N
Cappagh R
Blanchards
Dublin