
AQUALISA

eVOLVE™ ELECTRIC SHOWER

ELECTRIC 8.5KW / 9.5KW / 10.5KW WITH ADJUSTABLE HEAD
- MIDNIGHT BLACK / SPACE GREY / ARCTIC WHITE
- SATIN SILVER


MIDNIGHT BLACK	8.5KW	VOTZ25
	9.5KW	VOTZ26
	10.5KW	VOTZ27
ARCTIC WHITE	8.5KW	VOPZ25
	9.5KW	VOPZ26
	10.5KW	VOPZ27
SPACE GREY	8.5KW	VOXZ25
	9.5KW	VOXZ26
	10.5KW	VOXZ27

DIMENSIONAL DRAWINGS

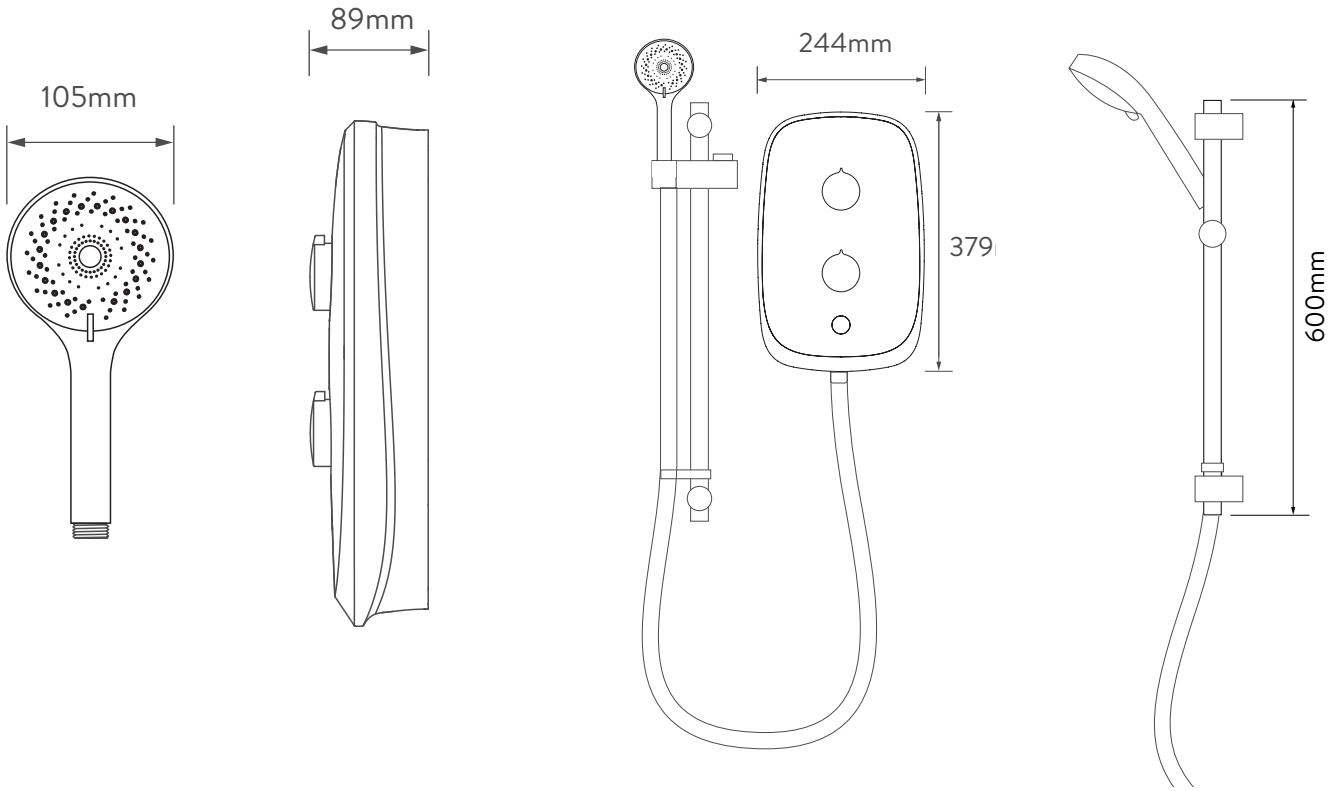

CONNECTIONS

ELECTRICAL
WATER

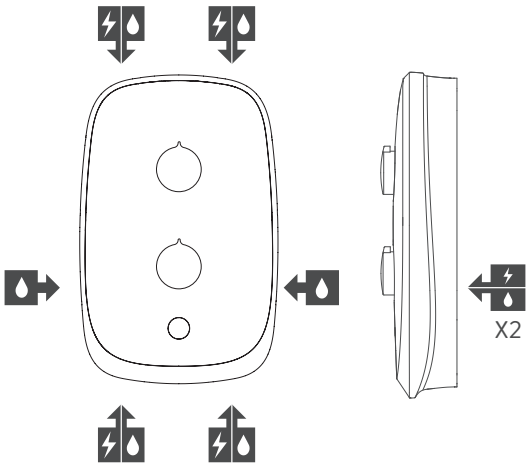

The company reserves the right to alter, change or modify the product or product specifications without prior warning.
Please refer to the installation guides for technical information.

Issue 03 February 2024

AQUALISA

eVOLVE™ ELECTRIC SHOWER

ELECTRIC 8.5KW / 9.5KW / 10.5KW WITH ADJUSTABLE HEAD
- MIDNIGHT BLACK / SPACE GREY / ARCTIC WHITE
- SATIN SILVER

MIDNIGHT BLACK	8.5KW	VOTZ25
	9.5KW	VOTZ26
	10.5KW	VOTZ27
ARCTIC WHITE	8.5KW	VOPZ25
	9.5KW	VOPZ26
	10.5KW	VOPZ27
SPACE GREY	8.5KW	VOXZ25
	9.5KW	VOXZ26
	10.5KW	VOXZ27

TECHNICAL SPECIFICATIONS

Power	8.5KW / 9.5KW / 10.5KW
Minimum pressure	0.085 MPa (0.85 bar) Recommended: 1 bar
Maximum pressure	1.0 MPa (10 bar)
Recommended maximum pressure	3 bar
Water entry points	Right hand side and left hand side: top, bottom, side and rear
Cable entry points	Right hand side and left hand side: top, bottom and rear
Inlet fitting connections	15mm compression or push fit elbow
Outlet fitting connections	1/2" BSP thread
Electric requirements	Supply voltage 230 – 240V, MCB rating : 8.5KW and 9.5KW - 40A 10.5KW - 45/50A
Water system	Mains cold system
Features	Digital temperature display
	Push button start/stop
	Rotary controls (power control rotary control)
	Safety features: Phased shut down, Over temperature protection
	Low pressure indicator
	Stainless steel hose
	105mm handset, 3 spray patterns (splash or flow handset)
Colour	Midnight Black / Space Grey / Arctic White
Trim colour	Satin Silver
Guarantee period	Shower unit – 2 years
	Shower head and kit – 2 years
Approvals	CE Marking
	BEAB
	European Water Label
	ERP Directive
	WRAS

The company reserves the right to alter, change or modify the product or product specifications without prior warning.
Please refer to the installation guides for technical information.

Issue 03 February 2024

AQUALISA

eVOLVE™ ELECTRIC SHOWER

ELECTRIC 8.5KW / 9.5KW / 10.5KW WITH ADJUSTABLE HEAD
- MIDNIGHT BLACK / SPACE GREY / ARCTIC WHITE
- SATIN SILVER

MIDNIGHT BLACK	8.5KW	VOTZ25
	9.5KW	VOTZ26
	10.5KW	VOTZ27
ARCTIC WHITE	8.5KW	VOPZ25
	9.5KW	VOPZ26
	10.5KW	VOPZ27
SPACE GREY	8.5KW	VOXZ25
	9.5KW	VOXZ26
	10.5KW	VOXZ27

FLOW RATES

	Flow rate l/min on power setting 3			Flow rate l/min on power setting 2			Flow rate l/min on power setting 1		
Cold water mains inlet temp°C	**5**	**10**	**15**	**5**	**10**	**15**	**5**	**10**	**15**
8.5kW									
Shower temperature of 37°C	3.48	4.13	5.09	n/a	2.43	2.99	n/a	n/a	n/a
Shower temperature of 38°C	3.38	3.99	4.87	n/a	2.34	2.86	n/a	n/a	n/a
Shower temperature of 40°C	3.18	3.72	4.48	n/a	n/a	2.63	n/a	n/a	n/a
Shower temperature of 43°C	2.93	3.38	4	n/a	n/a	2.35	n/a	n/a	n/a
9.5kW									
Shower temperature of 37°C	3.89	4.62	5.69	n/a	2.43	2.99	n/a	n/a	2.69
Shower temperature of 38°C	3.77	4.45	5.44	n/a	2.34	2.86	n/a	n/a	2.58
Shower temperature of 40°C	3.56	4.16	5	n/a	n/a	2.63	n/a	n/a	2.37
Shower temperature of 43°C	3.28	3.78	4.47	n/a	n/a	2.35	n/a	n/a	n/a
10.5kW									
Shower temperature of 37°C	4.3	5.11	6.28	n/a	2.67	3.29	n/a	2.43	2.99
Shower temperature of 38°C	4.17	4.92	6.01	n/a	2.58	3.15	n/a	2.34	2.86
Shower temperature of 40°C	3.93	4.6	5.53	n/a	2.41	2.9	n/a	n/a	2.63
Shower temperature of 43°C	3.62	4.18	4.94	n/a	n/a	2.59	n/a	n/a	2.35

N/A: WHERE THE UNIT CANNOT ACHIEVE THE FLOW RATE REQUIRED FOR A SPECIFIC TEMPERATURE

The company reserves the right to alter, change or modify the product or product specifications without prior warning.
Please refer to the installation guides for technical information.

Issue 03 February 2024