AQUALISA

S3 DUAL OUTLET SMART SHOWER

S3C.HC.U

S3MB.HC.U

S3BB.HC.U

S3GG.HC.U


WITH WI-FI CONNECTED TECHNOLOGY AND HD MULTI-FUNCTION DISPLAY, ADJUSTABLE HANDSET AND FIXED CEILING HEAD

HP / COMBI / BOOSTED GRAVITY


Chrome / Matt Black / Brushed Brass / Gunmetal Grey


DIMENSIONAL DRAWINGS

S3 Controller

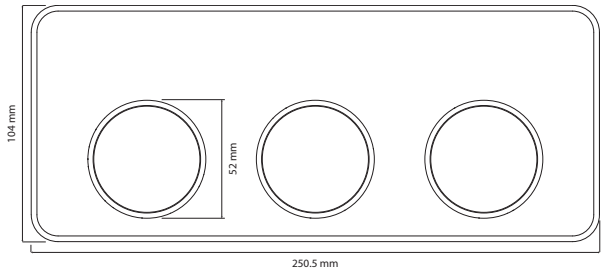


Rail Kit

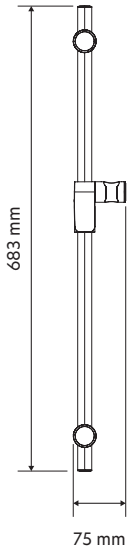


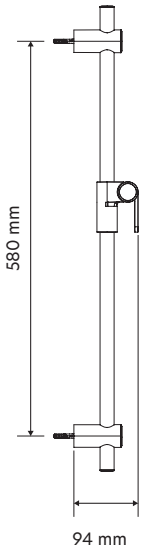


120mm Adjustable Handset

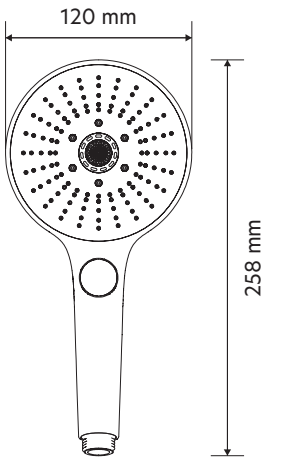


Wall Outlet







Ceiling Arm

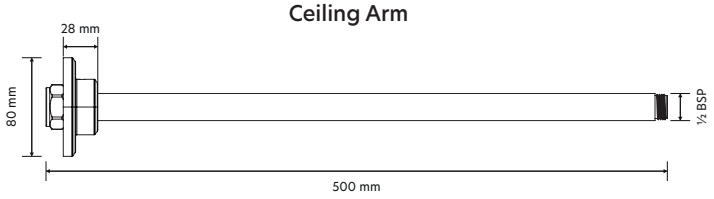


Un-Pumped Dual Outlet SmartValve™
HP / Combi / Boosted gravity

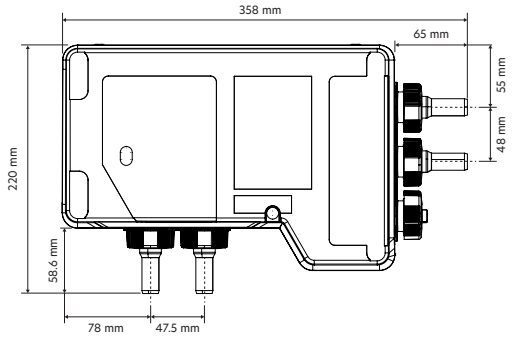


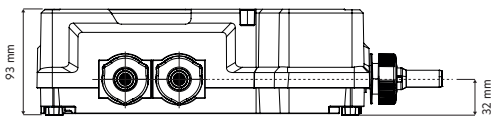

400mm Drencher



1.5m Hose



The company reserves the right to alter, change or modify the product or product specifications without prior warning.
Please refer to the installation guides for technical information.

Issue 01 February 2025

AQUALISA

S3 DUAL OUTLET SMART SHOWER

S3C.HC.U

S3MB.HC.U

S3BB.HC.U

S3GG.HC.U

WITH WI-FI CONNECTED TECHNOLOGY AND HD MULTI-FUNCTION DISPLAY, ADJUSTABLE HANDSET AND FIXED CEILING HEAD

HP / COMBI / BOOSTED GRAVITY

Chrome / Matt Black / Brushed Brass / Gunmetal Grey

TECHNICAL SPECIFICATIONS

Minimum operating pressure	1 Bar
Maximum operating pressure	5 Bar
Aqualisa SmartValve™ inlet fitting connections	15mm push fit fittings, valve inlet centres 47.5mm, inlet supply positions – hot right, cold left
Aqualisa SmartValve™ outlet fitting connection	15mm push fit
Permissible Aqualisa SmartValve™ siting location	Loft, airing cupboard, under bath
Supply temperature	Cold inlet temperature 1°C (minimum) Cold inlet temperature 15°C (maximum) Hot inlet temperature 65°C (maximum)
Water system	HP / Combi / Boosted gravity
Features	Fully customisable advanced high definition digital display
	Temperature and flow control dial with lighting indication, divert between outlets including pre-set temperature and flow
	Glass faceplate and metal dials including edge and mood backlighting, adjustable via app
	Auto 'wake up' and digital display to let you when know your chosen temperature has been reached
	Wifi, Mobile App, Google Home & Amazon Alexa enabled to allow you to control your shower remotely including profile selection and personalised user interface
	400mm Fixed and 120mm 3 spray adjustable head with push button spray selector
	Optional multi-function wired remote control
Guarantee period	5-year guarantee - shower unit
	2-year guarantee - shower head and kit
Approvals	CE Marking
	UKCA
	BEAB

The company reserves the right to alter, change or modify the product or product specifications without prior warning.
Please refer to the installation guides for technical information.

Issue 01 February 2025