
AQUALISA®

E2 AQUALISA ELECTRIC


E2G85

GREY – 8.5KW ELECTRIC SHOWER

DIMENSIONAL DRAWINGS

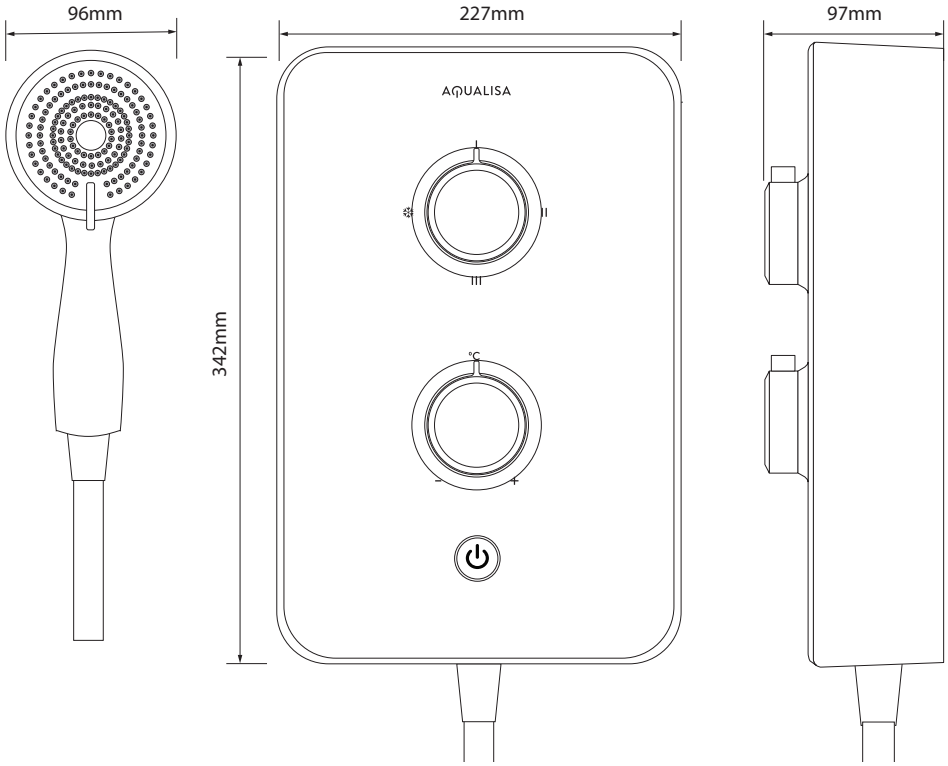

CONNECTIONS

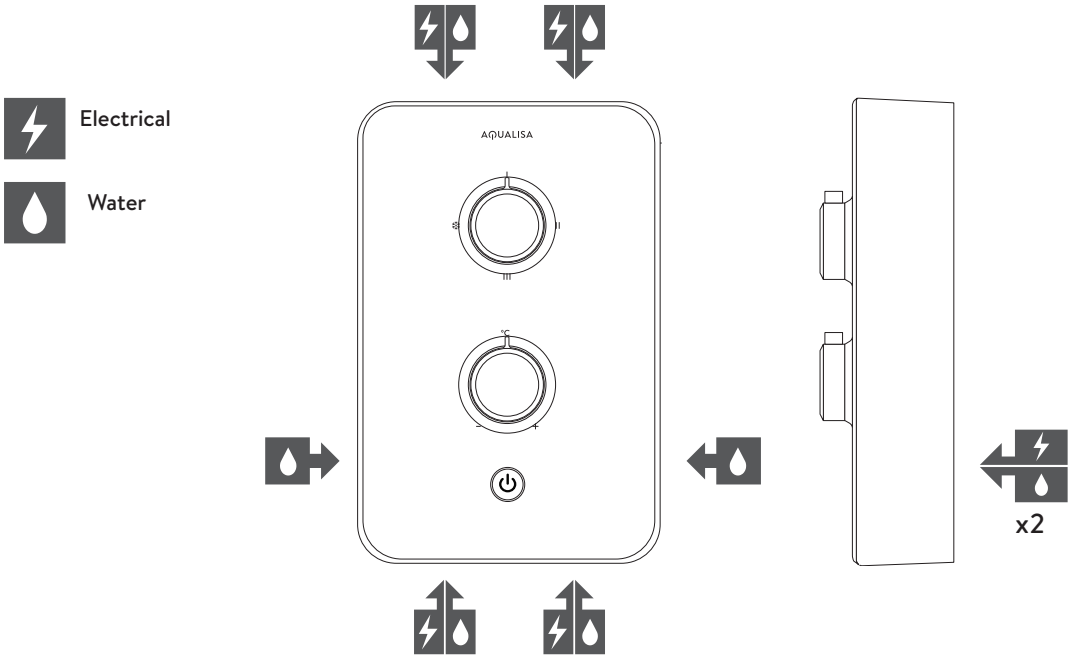

The company reserves the right to alter, change or modify the product or product specifications without prior warning. Please refer to the installation guides for technical information.

Issue 01 May 2024

AQUALISA®

E2 AQUALISA ELECTRIC

E2G85

GREY – 8.5KW ELECTRIC SHOWER

TECHNICAL SPECIFICATIONS

Power	8.5kW
Minimum pressure requirements	1 bar
Maximum pressure requirements	10 bar
Water entry points	Right and left – top, bottom, side and rear
Cable entry points	Right and left – top, bottom and rear
Inlet fitting connections	15mm push fit, 15mm compression
Outlet fitting connections	1/2" BSP thread
Supply temperature	Mains Cold Supply Only 5 – 25°C
Electric requirements	Supply voltage 230 – 240V
Water system	Mains cold system
Features	3 power settings
	Push button start/stop
	Temperature control
	Adjustable stainless steel rail
	Multimode handset
Colour	Grey
Guarantee period	Shower Unit 2 year guarantee
	Shower Head and Kit 2 year guarantee
Approvals	CE Marking
	BEAB
	European Water Label
	ERP Directive

The company reserves the right to alter, change or modify the product or product specifications without prior warning. Please refer to the installation guides for technical information.