

1.0 Reference and Address			
Report Number	102811648MIN-001	Original Issued: 24-Jan-2017	Revised: 11-Oct-2023
Standard(s)	Amusement and Gaming Machines [UL 22:2008 Ed.6+R:06Feb2019] Safety Of Household And Similar Appliances - Part 1: General Requirements (R2016) [CSA C22.2#60335-1:2011 Ed.1] Household and Similar Electrical Appliances - Safety - Part 2-82: Particular Requirements for Amusement Machines and Personal Service Machines [CSA C22.2#60335-2-82:2020 Ed.4]		
Applicant	Bay Tek Entertainment Inc	Manufacturer 1	Bay Tek Entertainment Inc
Address	1077 East Glenbrook Drive Pulaski, WI 54162	Address	1077 East Glenbrook Drive Pulaski, WI 54162
Country	USA	Country	USA
Contact	Tom Diedrich	Contact	Tom Diedrich
Phone	920-822-3951	Phone	920-822-3951
FAX	NA	FAX	NA
Email	tdiedrich@baytekgames.com	Email	tdiedrich@baytekgames.com

2.0 Product Description	
Product	Amusement Machine - Pop the Lock
Brand name	Bay Tek Games
Description	Pop the Lock is a coin/ cash/ or card operated game. Where the player inserts the credit needed to start game play. The player then has to hit a button when a red bar moves over a yellow dot. Cord-connected stationary appliance with a detachable supply cord, for indoor use only. Other versions of the game would employ different graphics and software. with the possibility of alternate player input devices such as a joystick, trackball, etc. which will use the same input being exercised by the pushbutton. Cord connected, and for indoor dry locations only
Models	AAGM-PTL-220V
Model Similarity	NA
Ratings	4.5A at 110-120 VAC, 50/60 Hz
Other Ratings	NA

3.0 Product Photographs

Photo 1 - External view, Front



3.0 Product Photographs

Photo 2 - External view - Rear



3.0 Product Photographs

Photo 3 - External view with front cover in open position



3.0 Product Photographs

Photo 4 - External view with back cover removed




3.0 Product Photographs

Photo 5 - Compartment for controls



Photo 6 - Internal view of control compartment

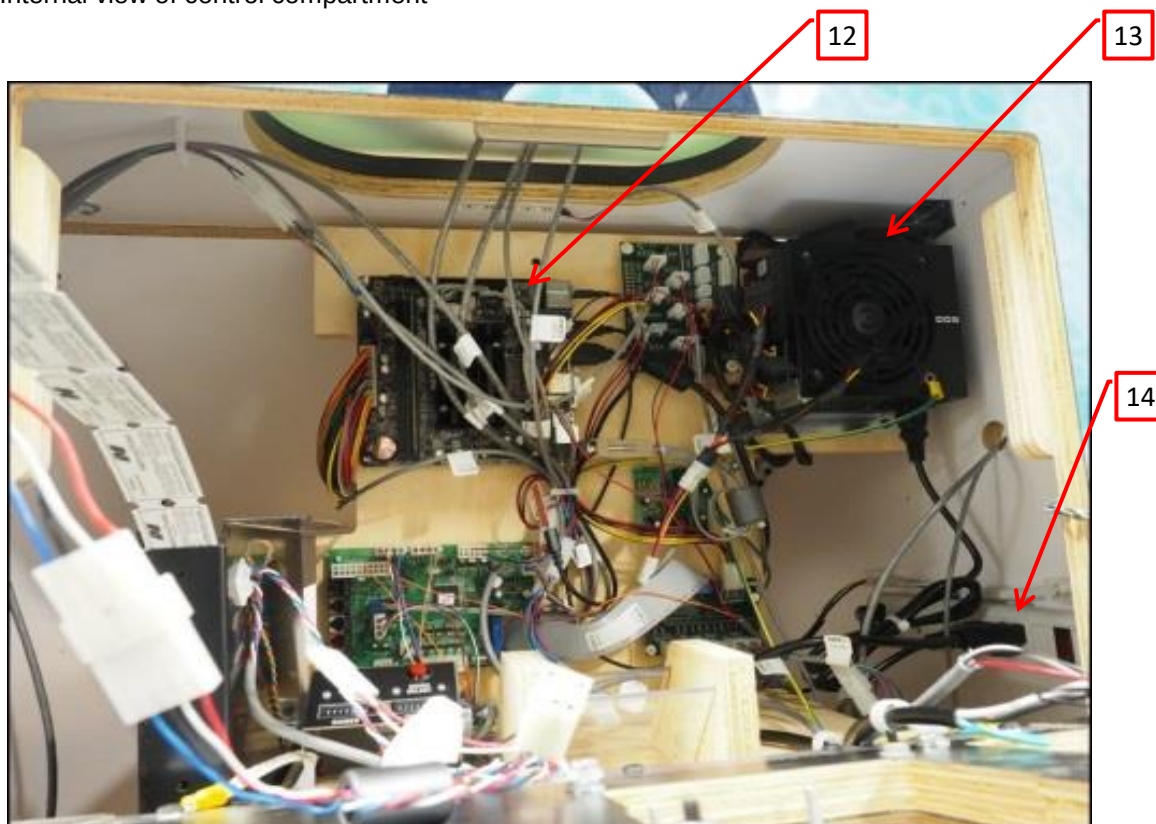

4.0 Critical Components

Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
1	1	Enclosure, formed plastic around marquee	Le Tourneau Plastics, Inc.	HMWPE 1000	Formed from Primex HMWPE starting gauge 3/16" Bay Tek reference A5VF2305, U-shaped with OD82cm, 9cm deep	See 5.0
1	2	Enclosure, formed plastic around Monitor	Le Tourneau Plastics, Inc.	HMWPE 1000	Formed from Primex HMWPE starting gauge 3/16" Bay Tek reference A5VF2305, donut shaped, 94cm OD x 76cm ID x 10.5cm deep	See 5.0
1	3	Enclosure (plastic top over monitor)	Sheffiled Plastics	Makrolon GP	1/8 inch think minimum Polycarbonate, approximately 67cm in diameter. Flammability rating HB	UR
1	4	Switch (Push Button Assembly)	E-SWITCH	LS0851500F05 0C1ASPECIAL	125/250VAC, 15A (Supplier assembly reference 53-8700-00)	UR
			Various	Various	125/250VAC, 15A minimum	
1	5	Enclosure (Surface for button or user interface)	Quadrant Engineering Plastic Products	Proteus® Co-Polymer Polypropylene	3/4" thick sheet, approximately 33cm X 74cm	See 5.0
1	6	Enclosure (Top of control compartment)	Quadrant Engineering Plastic Products	Proteus® Co-Polymer Polypropylene	3/4" thick sheet, approximately 35.5cm X 78cm	See 5.0
2	7	Enclosure (wooden parts)	Various	Various	3/4" thick Plywood; Overall dimensions: approximately 191cm X 82cm X 112cm	NR
1	8	Enclosure (Marquee graphics)	Romo Durable Graphics	A5DE3417 A5DE3416 A5DE3415	Base, 60 mil VIVAK (UR, rated HB min) PETG	NR
3	9	LCD Monitor	LG	D55RWB344-F55-A	100-240Vac, 2A MAX, 50/60Hz	cULus
			Various	Various	100-240Vac, 2A MAX, 50/60Hz	
3	10	Enclosure (Side of control compartment)	Quadrant Engineering Plastic Products	Proteus® Co-Polymer Polypropylene	3/4" thick sheet, approximately 69cm X 46cm	See 5.0
5	11	Bill Acceptor (Not shown)	MEI Inc.	AE2XX	Rated input voltage: 90–135VAC/60Hz or 18–28VAC/60Hz or 22VDC to 45VDC or 12VDC, depending on model Power Consumption – Acceptance: 10W	URus
			Pyramid Technologies Inc.	APEX-5X0X-XXX-XXX	Rated input voltage: 12 VDC, or 24 VAC / 60 Hz, or 120 VAC / 60 Hz, depending on model Rated input current: 500 mA for all models	
6	12	Raw materials for PCBs	Various	Various	V-1 minimum, 105°C minimum; DC SELV only	UR

4.0 Critical Components

Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
6	13	Power supply	Coming Data	CD-12BR-500	Input:110/230V VAC, 50/60Hz, 10/6A Output:+3.3V/6A, +5V/6A, +12V/37A, -12V/0.3A, +5VSB/2A Total output: 500W	cURus
			Rosewill	LC-8360BTX	Input:115/230V VAC, 50/60Hz, 8/4A Output:+3.3V/20A, +5V/12A, +12V1/10A, +12V2/13A,- 12V/0.3A, +5Vsb/2.5A Total output: 350W	cURus
			EVGA	500W	Input:100-240V VAC, 50-60Hz, 8/4A Output:+3.3V/24A, +5V/20A, +12V/40A, -12V/0.3A, +5Vsb/3A Total output: 500W	cTUVus
6	14	Power strip	Master Electrician (Ningbo Yaling)	ME901111	Rated 125 V, 15 A	cULus
			Various	Various	Rated 125V minimum, 15 A minimum	
1	15	Appliance inlet with EMI filter (not shown)	Curtis Industries	F1700CA06	Rated 250 V, 4 A	cURus, CSA
1	16	Coin collector (not shown)	Various	Various	12 VDC	NR
1	17	Card Reader (optional, not shown)	USA Technologies	Eport G9	Located in a 12 Vdc circuit	NR
			Various	Various		
1	18	Printer (Optional)	Custom	TG2460H	12VDC, 1.8A	NR
				TG2480H		
1	19	LED light bars (not shown)	Various	Various	Located in a 12Vdc circuit	NR
1	20	LED strips (not shown)	Various	Various	Located in a 12Vdc circuit	NR
1	21	Nameplate label (not shown)	Various	Various	Suitable for wood or plastic surface. Includes Applicant or Manufacturer's name, Model #, Serial Number, electrical ratings and date code.	UR or CSA

4.0 Critical Components

Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
1	22	Safety label (not shown)	Various	Various	Suitable for wood or plastic surface. See Illustration #1 for details, in both English and French.	UR or CSA
6	23	Power Cord (Not Shown)	Various	Various	300V, 105°C Minimum, VW-1, Detachable, 7' long, Type SJTOW	UL, cUL

NOTES:

- 1) Not all item numbers are indicated (called out) in the photos, as their location is obvious.
- 2) "Various" means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.
- 3) Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" - indicates Unlisted and only visual examination is necessary. "See 5.0" indicates Unlisted components or assemblies to be evaluated periodically refer to section 5.0 for details.

5.0 Critical Unlisted CEC Components

POLYMERIC MATERIALS

Photo #	Item no.	Name	Manufacturer/Trademark	Type / model
1	5	Enclosure (Surface for button or user interface)	Quadrant Engineering Plastic Products	Proteus® Co-Polymer Polypropylene
Electrical Rating:		N/A		Flame rating HB
Component Standard used:		UL 746C		

MATERIALS LIST

Component	Manufacturer	Type/model	Dimensions/thickness/assembly information
Plastic Enclosure	Le Tourneau Plastics, Inc.	HMWPE 1000	Samples for testing: 3/16" thick by 6" by 6"

VERIFICATION PROCESS

Frequency:	Annual	Test Site:	Fridley	Number of samples to test:	3
Test Name		Test Parameters			
Flame Test		UL 746C, 12mm Flame Test			

POLYMERIC MATERIALS

Photo #	Item no.	Name	Manufacturer/Trademark	Type / model
1	6	Enclosure (Top of control compartment)	Quadrant Engineering Plastic Products	Proteus® Co-Polymer Polypropylene
Electrical Rating:		N/A		Flame rating HB
Component Standard used:		UL 746C		

MATERIALS LIST

Component	Manufacturer	Type/model	Dimensions/thickness/assembly information
Plastic Enclosure	Le Tourneau Plastics, Inc.	HMWPE 1000	Samples for testing: 3/16" thick by 6" by 6"

VERIFICATION PROCESS

Frequency:	Annual	Test Site:	Fridley	Number of samples to test:	3
Test Name		Test Parameters			
Flame Test		UL 746C, 12mm Flame Test			

POLYMERIC MATERIALS

Photo #	Item no.	Name	Manufacturer/Trademark	Type / model
3	10	Enclosure (Side of control compartment)	Quadrant Engineering Plastic Products	Proteus® Co-Polymer Polypropylene
Electrical Rating:		N/A		Flame rating HB
Component Standard used:		UL 746C		

MATERIALS LIST

Component	Manufacturer	Type/model	Dimensions/thickness/assembly information
Plastic Enclosure	Le Tourneau Plastics, Inc.	HMWPE 1000	Samples for testing: 3/16" thick by 6" by 6"

5.0 Critical Unlisted CEC Components			
VERIFICATION PROCESS			
Frequency:	Annual	Test Site:	Fridley
		Number of samples to test:	3
Test Name		Test Parameters	
Flame Test		UL 746C, 12mm Flame Test	

POLYMERIC MATERIALS				
Photo #	Item no.	Name	Manufacturer/Trademark	Type / model
1	2	Enclosure, formed plastic around Monitor	Le Tourneau Plastics, Inc.	HMWPE 1000
Electrical Rating:			Flame rating	HB
Component Standard used:		UL 746C		

MATERIALS LIST			
Component	Manufacturer	Type/model	Dimensions/thickness/assembly information
Plastic Enclosure	Quadrant Engineering Plastic Products	Proteus® Co-Polymer Polypropylene	Samples for testing: 3/4" thick by 6" by 6"

VERIFICATION PROCESS			
Frequency:	Annual	Test Site:	Fridley
		Number of samples to test:	3
Test Name		Test Parameters	
Flame Test		UL 746C, 12mm Flame Test	

POLYMERIC MATERIALS				
Photo #	Item no.	Name	Manufacturer/Trademark	Type / model
1	1	Enclosure, formed plastic around marquee	Le Tourneau Plastics, Inc.	HMWPE 1000
Electrical Rating:			Flame rating	HB
Component Standard used:		UL 746C		

MATERIALS LIST			
Component	Manufacturer	Type/model	Dimensions/thickness/assembly information
Plastic Enclosure	Quadrant Engineering Plastic Products	Proteus® Co-Polymer Polypropylene	Samples for testing: 3/4" thick by 6" by 6"

VERIFICATION PROCESS			
Frequency:	Annual	Test Site:	Fridley
		Number of samples to test:	3
Test Name		Test Parameters	
Flame Test		UL 746C, 12mm Flame Test	

6.0 Critical Features	
<u>Recognized Component</u> - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.	
<u>Listed Component</u> - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.	
<u>Unlisted Component</u> - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.	
<u>Critical Features/Components</u> - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the product standard.	
<u>Construction Details</u> - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.	
1.	<u>Spacing</u> - In primary circuits, 2.4 mm minimum spacing are maintained through air and over surfaces of insulating material between current-carrying parts of opposite polarity and 2.4 mm minimum between such current-carrying parts and dead-metal parts or low voltage isolated circuits.
2.	<u>Mechanical Assembly</u> - Components such as switches, fuseholders, connectors, wiring terminals and display lamps are mounted and prevented from shifting or rotating by the use of lockwashers, starwashers, or other mounting format that prevents turning of the component.
3.	<u>Corrosion Protection</u> - All ferrous metal parts are protected against corrosion by painting, plating or the equivalent.
4.	<u>Accessibility of Live Parts</u> - All uninsulated live parts in primary circuitry are housed within a non-metallic enclosure constructed with no openings other than those specifically described in Sections 4 and 5.
5.	<u>Grounding</u> - All exposed dead-metal parts and all dead-metal parts within the enclosure that are exposed are connected to the grounding lead of the power supply cord through the appliance inlet.
6.	<u>Polarized Connection</u> - This product is provided with a polarized power supply connection. All single pole switches and fuses are connected only to the ungrounded supply circuit conductor.
7.	<u>Internal Wiring</u> - Internal wiring is routed away from sharp or moving parts. Internal wiring leads terminating in soldered connections are made mechanically secure prior to soldering. Recognized Component separable (quick disconnect) connectors of the positive detent type, closed loop connectors, or other types specifically described in the text of this report are also acceptable as internal wiring terminals. At points where internal wiring passes through metal walls or partitions, the wiring insulation is protected against abrasion or damage by plastic bushings or grommets. All primary wiring is minimum 18 AWG, with a minimum rating of 300 V, 60 °C.
8.	<u>Markings</u> - The product is marked on a UL 969 labeling system as follows: manufacturer's name, model number, serial number, date of manufacture, and electrical ratings. See item #21 in section 4.0.
9.	<u>Cautionary Markings</u> - Illustration #1 is required. See also item 22 in section 4.0.
10.	<u>Installation, Operating and Safety Instructions</u> - Instructions for installation and use of this product are provided by the manufacturer.


7.0 Illustrations

Illustration 1 - Warning Labels in both English and French.



8.0 Test Summary					
Evaluation Period	9-Jan-2017 to 27-1-2017		Project No.	G102811648	
Sample Rec. Date	9-Jan-2017	Condition	Production	Sample ID.	MIN1701091150-001
Test Location	7250 Hudson Blvd. #100 Oakdale MN 55128 USA				
Test Procedure	Testing Lab				
Due to testing that was previously performed under Report No. 102417522MIN-003 and 101779487MIN-001 for similar product with the same power supply and control motherboard, only the following tests deems necessary:					
The following tests were performed:					
Test Description	UL 22 Clause	CSA C22.2#60335-1 Clause			
Starting Current Test	33	-			
Leakage Current Test	34	13.2			
Input Test	35	10.2			
Temperature Test	36	11.8			
Dielectric Voltage-Withstand Test	37	13.3			
Spill Test	38	-			
Physical Stability Test	39	20			
800N Downward Force Test	39.5	-			
250N Tipping Test	39.7	-			
Grounding Impedance Test	44	27.5			
Impact test for nonmetallic enclosures and guards	45.2	21.1			
Moisture Resistance	-	15			
Leakage Current After Humidity Test	-	16.2			
Electric Strength After Humidity Test	-	16.3			
Ball Pressure Test	-	30.1			
Glow Wire Test	-	30.2.1			
Glow Wire Test (Unattended Appliances)	-	30.2.3			
Evaluation Period	10/11/2023		Project No.	G105605184	

Due to the previous testing performed and reported above no additional testing was necessary for Amusement and Gaming Machines [UL 22:2008 Ed.6+R:06Feb2019]; Safety Of Household And Similar Appliances - Part 1:

8.1 Signatures			
A representative sample of the product covered by this report has been evaluated and found to comply with the applicable requirements of the standards indicated in Section 1.0.			
Completed by:	Jorge Blancas	Reviewed by:	Brian Siuta
Title:	Engineer	Title:	Reviewer
Signature:		Signature:	

9.0 Correlation Page For Multiple Listings

The following products, which are identical to those identified in this report except for model number and Listee name, are authorized to bear the ETL label under provisions of the Intertek Multiple Listing Program.

BASIC LISTEE	Bay Tek Entertainment Inc
Address	1077 East Glenbrook Drive Pulaski, WI 54162
Country	USA
Product	Amusement Machine - Pop the Lock

MULTIPLE LISTEE 1	None
Address	
Country	
Brand Name	
ASSOCIATED MANUFACTURER	
Address	
Country	
MULTIPLE LISTEE 1 MODELS	BASIC LISTEE MODELS

MULTIPLE LISTEE 2	None
Address	
Country	
Brand Name	
ASSOCIATED MANUFACTURER	
Address	
Country	
MULTIPLE LISTEE 2 MODELS	BASIC LISTEE MODELS

MULTIPLE LISTEE 3	None
Address	
Country	
Brand Name	
ASSOCIATED MANUFACTURER	
Address	
Country	
MULTIPLE LISTEE 3 MODELS	BASIC LISTEE MODELS

10.0 General Information

The Applicant and Manufacturer have agreed to produce, test and label ETL Listed products in accordance with the requirements of this Report. The Manufacturer has also agreed to notify Intertek and to request authorization prior to using alternate parts, components or materials.

COMPONENTS

Components used shall be those itemized in this Intertek report covering the product, including any amendments

LISTING MARK

The ETL Listing mark applied to the products shall either be separable in form, such as labels purchased from Intertek, or on a product nameplate or other media only as specifically authorized by Intertek. Use of the mark is subject to the control of Intertek.

The mark must include the following four items:

- 1) applicable country identifiers "US" and/or "C" or "US", "C" and "EU"
- 2) the word "Listed" or "Classified" or "Recognized Component" (whichever is appropriate)
- 3) a control number issued by Intertek
- 4) a product descriptor that identifies the standards used for certification. Example:

For US standards, the words, "Conforms to" shall appear with the standard number along with the word, "Standard" or "Std." Example: "Conforms to ANSI/UL Std. XX."

For Canadian standards, the words "Certified to CAN/CSA Standard CXX No. XX." shall be used, or abbreviated, "Cert. to CAN/CSA Std. CXX No. XX."

Can be used together when both standards are used.

If all standards on the ATM have the same standard title, the shared title or its abbreviation may be used in place of the examples above. Example: "Medical Electrical Equipment" or "MEE"; "Information Technology Equipment" or "ITE"; "Audio/Video Information And Communication Technology Equipment" or "A/V ICTE".

Note: A facsimile must be submitted to Intertek, Attn: Follow-up Services for approval prior to use.

The facsimile need not have a control number. A control number will be issued **after signed Certification Agreements** have been received by the Follow-up Services office, approval of the facsimile of your proposed Listing Mark, satisfactory completion of the Listing Report, and scheduling of a factory assessment in your facility.

MANUFACTURING AND PRODUCTION TESTS

Manufacturing and Production Tests shall be performed as required in this Report.

FOLLOW-UP SERVICE

Periodic unannounced audits of the manufacturing facility (and any locations authorized to apply the mark) shall be scheduled by Intertek. An audit report shall be issued after each visit. Special attention will be given to the following:

1. Conformance of the manufactured product to the descriptions in this Report.
2. Conformance of the use of the ETL mark with the requirements of this Report and the Certification Agreement.
3. Manufacturing changes.
4. Performance of specified Manufacturing and Production Tests.

In the event that the Intertek representative identifies non-conformance(s) to any provision of this Report, the Applicant shall take one or more of the following actions:

1. Correct the non-conformance.
2. Remove the ETL Mark from non-conforming product.
3. Contact the issuing product safety evaluation center for instructions.

10.1 Evaluation of Unlisted Components

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

The Applicant will be notified, in writing, via the applicable contact methods, as defined in Section 1.0, when these components must be selected and sent to Component Evaluation Center (CEC) for re-evaluation.

Due to particular testing requirements, some components may be requested to be shipped to specific labs. Thus, specific shipment destination(s) for each sample will be provided in the written notification.

Managing CEC Location:
Intertek Testing Services NA Inc.
ETL Component Evaluation Center
1717 Arlingate Ln.
Columbus, Ohio 43228 USA

Attn: CEC Safety

Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

11.0 Manufacturing and Production Tests

The manufacturer agrees to conduct the following Manufacturing and Production Tests as specified:

Required Tests

Dielectric Voltage Withstand Test , Grounding Continuity Test

11.1 Dielectric Voltage Withstand Test

Method

One hundred percent of production of the products covered by this Report shall be subjected to a routine production line dielectric withstand test.

The test shall be conducted on products, which are fully assembled. Prior to applying the test potential, all switches, contactors, relays, etc., should be closed so that all primary circuits are energized by the test potential. If all primary circuits cannot be tested at one time, then separate applications of the test potential shall be made.

The test voltage specified below shall be applied between primary circuits and accessible dead-metal parts. The test voltage may be gradually increased to the specified value but must be maintained at the specified value for one second or one minute as required.

Test Equipment

The test equipment shall incorporate a transformer with an essentially sinusoidal output, a means to indicate the applied test potential, and an audible and/or visual indicator of dielectric breakdown.

The test equipment shall incorporate a voltmeter in the output circuit to indicate directly the applied test potential if the rated output of the test equipment is less than 500VA.

If the rated output of the test equipment is 500VA or more, the applied test potential may be indicated by either:

- 1 - a voltmeter in the primary circuit;
- 2 - a selector switch marked to indicate the test potential; or
- 3 - a marking in a readily visible location to indicate the test potential for test equipment having a single test potential output.

In cases 2 and 3, the test equipment shall include a lamp or other visual means to indicate that the test potential is present at the test equipment output. All test equipment shall be maintained in current calibration.

Products Requiring Dielectric Voltage Withstand Test:

<u>Product</u>	<u>Test Voltage</u>	<u>Test Time</u>
All products covered by this Report.	1000V	60 s
	or	
	1200V	1 s

11.2 Grounding Continuity Test

Method

Each product listed below shall be subjected to a test to determine that there is continuity between accessible dead-metal parts of the product and the grounding pin or blade of the attachment plug.

If all accessible dead metal is connected, only a single test need be performed. A visual or audible device (ohmmeter, buzzer, etc.) may be used to indicate grounding continuity.

Products Requiring Grounding Continuity Test:

All products covered by this Report.

12.0 Revision Summary				
The following changes are in compliance with the declaration of Section 8.1:				
Date/ Proj # Site ID	Project Handler/ Reviewer	Section	Item	Description of Change
3-May-2017	E. Wang	1	-	Added 2nd manufacturer "MCL Industries, Inc." and its contact informaiton
G102811648MIN	T. Mengistu			
25-Feb-2019	J. Williams	1	--	Reformatted Standards to match GSSQ from "Safety Of Household And Similar Appliances-Part 1: General Requirements (R2016) [CSA C22.2#60335-1:2011 Ed.1], CSA E60335-2-82 Issued: 2013/03/01 Household and Similar Electrical Appliances – Safety – Part 2-82: Particular Requirements for Amusement Machines and Personal Service Machines" to "Safety Of Household And Similar Appliances - Part 1: General Requirements (R2016) <Expires: 31Dec2018 - ONLY for reports that DO NOT have an associated Part 2 standard> [CSA C22.2#60335-1:2011 Ed.1], Household And Similar Electrical Appliances – Safety – Part 2-82: Particular Requirements For Amusement Machines And Personal Service Machines [CSA E60335-2-82:2013 Ed.3]"
G103846227CHI	H. Lozano		--	Changed applicant and manufacturer 1 from "Bay Tek Games, Inc." to "Bay Tek Entertainment Inc"

12.0 Revision Summary				
The following changes are in compliance with the declaration of Section 8.1:				
Date/ Proj # Site ID	Project Handler/ Reviewer	Section	Item	Description of Change
11-Oct-2023	J. Blancas 	1	--	Updated Standard: From:"Amusement And Gaming Machines [UL 22:2008 Ed.6 +R:29Oct2014] Safety Of Household And Similar Appliances - Part 1: General Requirements (R2016) <Expires: 31Dec2018 - ONLY for reports that DO NOT have an associated Part 2 standard> [CSA C22.2#60335-1:2011 Ed.1] Household And Similar Electrical Appliances – Safety – Part 2-82: Particular Requirements For Amusement Machines And Personal Service Machines [CSA E60335-2-82:2013 Ed.3]" To:"Amusement and Gaming Machines [UL 22:2008 Ed.6+R:06Feb2019] Safety Of Household And Similar Appliances - Part 1: General Requirements (R2016) [CSA C22.2#60335-1:2011 Ed.1] Household and Similar Electrical Appliances - Safety - Part 2-82: Particular Requirements for Amusement Machines and Personal Service Machines [CSA C22.2#60335-2-82:2020 Ed.4]" Removed MFG2: "MCL Industries, Inc.,660 Corporate Way Pulaski, WI 54162, USA, Paul Simons, 920-822-6261, 920-822-4200, psimons@mcl.bz"
G105605184CHI	B. Siuta 	4	23	Added component 23: "Power Cord (Not Shown), Various, 300V, 105°C Minimum, VW-1, Detachable, 7' long, Type SJTOW, UL, cUL"
		8	--	Updated test summary for project G105605184.