


FTG50 FTG60

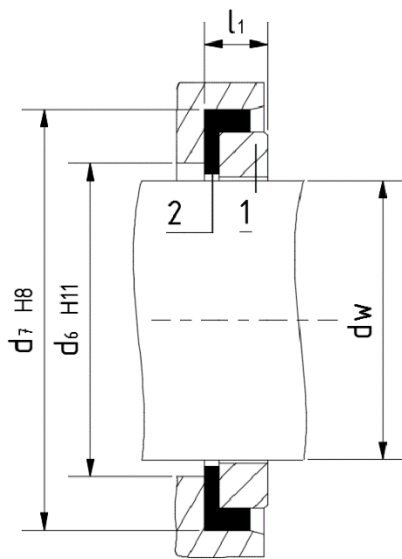

Einsatzgrenzen: d1 10-100 mm

Komponenten: 1 Gleitring
2 Gegenring

Werkstoffe lt. Werkstofftabelle

Standard-Abmessungen (Fertigung nach Sondermaß auch möglich)

FTG60				FTG50		
dw	d6	d7	l1	d6	d7	l1
10	17	21	6.6	11.0	24.6	9
12	19	23	6.6	13.5	27.8	9
14	21	25	6.6	17.0	30.95	10.5
16	23	27	6.6	17.0	30.95	10.5
18	27	33	7.5	20.0	34.15	10.5
20	29	35	7.5	21.5	35.7	10.5
22	31	37	7.5	23.0	37.3	10.5
24	33	39	7.5	26.5	40.5	10.5
25	34	40	7.5	26.5	40.5	10.5
28	37	43	7.5	29.5	47.65	12
30	39	45	7.5	32.5	50.8	12
32	42	48	7.5	32.5	50.8	12
33	42	48	7.5	36.5	54	12
35	44	50	7.5	36.5	54	12
38	49	56	9	39.5	57.15	12
40	51	58	9	42.5	60.35	12
43	54	61	9	46.0	63.5	12
45	56	63	9	46.0	63.5	12
48	59	66	9	49.0	66.7	12
50	62	70	9.5	52.0	69.85	13.5
53	65	73	11	55.5	73.05	13.5
55	67	75	11	58.5	76.2	13.5
58	70	78	11	61.5	79.4	13.5
60	72	80	11	61.5	79.4	13.5
65	77	85	11	68.0	92.1	16
68	81	90	11.3	71.0	95.25	16
70	83	92	11.3	71.0	95.25	16
75	88	97	11.3	77.5	101.6	16
80	96	105	12	84.0	114.3	20
85	100	110	14	87.0	117.5	20
90	105	115	14	93.5	123.85	20
95	110	120	14	96.5	127	20
100	115	125	14	103.0	133.35	20