



# HSM VK 1210

## Channel baling press HSM VK 2310

For industrial applications with small material loads - Troughput up to approx. 117 m<sup>3</sup>/h

### Technical data

<b>Order number:</b>	6617001	<b>Loading aperture width x Loading aperture length:</b>	670 x 1000 mm
<b>Pressing power:</b>	159 kN	<b>Bale width x Bale height x Bale length:</b>	750 x 500 x 600-1200 mm
<b>Specific pressing power:</b>	42,4 N/cm <sup>2</sup>	<b>Length x Width x Height:</b>	5940 x 2700 x 1940 mm
<b>Driving power:</b>	9,2 kW	<b>Weight:</b>	3,8 t
<b>Voltage / Frequency:</b>	400 V / 50 Hz	<b>Type of consumables:</b>	Wire
<b>Cycle time when idling vacío:</b>	11,5 s	<b>Press material:</b>	Plastic film, Mixed paper, Cardboard, Punch waste/residue, PET beverage and aluminium cans, soft packaging, PET
<b>Volume throughput in idle operation (theor.):</b>	117 m <sup>3</sup> /h		
<b>Volume throughput at 50kg/m<sup>3</sup> (theor.):</b>	5.85 t/h		


### Product information



Particularly suitable for cardboard, plastic film and PET bottles



Loading aperture of 1000 mm suitable for larger material pieces and higher throughput rates




Available as an option with manual strapping





**System solution**

Integration into automated industrial production processes.

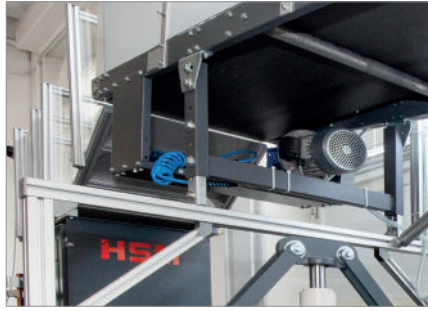

**Continuous loading**

Suitable for continuous loading with conveyor belt, air feeding or similar.



**Compact bales**

The bales can be stacked and are easy to transport.



**Automatic operation**

Control of the pressing process via light barrier.



**Operating side**

Can be fully integrated into existing workflows and processes. Operating side can be selected.



**Sturdy design**

Very low space requirement thanks to compact and sturdy design.

