

# HSM V-Press 818



## HSM V-Press 818 vertical baling press

Thanks to its low transport height, the HSM V-Press 818 can be easily transported to wherever it needs to be used.

### Technical data

|                                                      |                         |                                                |                                                                     |
|------------------------------------------------------|-------------------------|------------------------------------------------|---------------------------------------------------------------------|
| <b>Order number:</b>                                 | 6050414                 | <b>Bale length x Bale width x Bale height:</b> | 1200 x 700 x 780 mm                                                 |
| <b>EAN</b>                                           | 4026631080583           | <b>Bale weight:</b>                            | 200 kg                                                              |
| <b>Pressing power:</b>                               | 185 kN                  | <b>Method of loading:</b>                      | manual                                                              |
| <b>Specific pressing power:</b>                      | 19,23 N/cm <sup>2</sup> | <b>Width x Depth x Height:</b>                 | 1700 x 1046 x 2370 mm                                               |
| <b>Driving power:</b>                                | 4 kW                    | <b>Weight:</b>                                 | 1070 kg                                                             |
| <b>Voltage / Frequency:</b>                          | 400 V / 50 Hz           | <b>Related product line:</b>                   | V-Press                                                             |
| <b>Cycle time when idling vacío:</b>                 | 27 s                    | <b>Type of consumables:</b>                    | Strapping tape                                                      |
| <b>Volume throughput in idle operation (theor.):</b> | 5 m <sup>3</sup> /h     | <b>Press material:</b>                         | Plastic film, Mixed paper, Cardboard, Punch waste/residue, Clothing |
| <b>Loading height:</b>                               | 958 mm                  |                                                |                                                                     |
| <b>Loading aperture width x height:</b>              | 1195 x 530 mm           |                                                |                                                                     |

### Product information



To fill the press, the upper half of the doors is folded down



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



Low installation height and small footprint




### Compresses cardboard and film

Suitable for cardboard as well as film.



### Automatic start

Automatic start of the pressing process after closing the door.

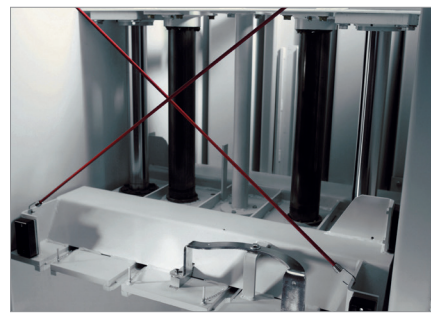

### Optimized pressing

Massive press ram and extremely robust press plate guidance.



### Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.



### HSM TCS

HSM TCS (Torsion Control System) for monitoring press ram movement.



### Strapping

Manual bale strapping with continuous polyester tape.



Made in Germany



cost effective



simple operation



95% volume reduction



[www.tuev-sued.de/ps-zert](http://www.tuev-sued.de/ps-zert)



HSM V-Press 605,  
610



HSM V-Press 818,  
820, 825

[www.hsm.eu](http://www.hsm.eu)

**HSM®**