

# HSM HL 3521 T



## HSM HL 3521 T horizontal baling press

The model HSM HL 3521 T can be filled via conveyor and is especially designed to compact tyres. Of course, other packaging materials can also be compressed.

### Technical data

<b>Order number:</b>	6270000	<b>Bale width x Bale height x Bale length:</b>	800 x 1000 x 1200 mm
<b>Pressing power:</b>	320 kN	<b>Bale weight:</b>	850 kg
<b>Specific pressing power:</b>	40 N/cm <sup>2</sup>	<b>Method of loading:</b>	manual
<b>Driving power:</b>	22 kW	<b>Length x Width x Height:</b>	8100 x 1660 x 2485 mm
<b>Voltage / Frequency:</b>	400 V / 50 Hz	<b>Weight:</b>	8100 kg
<b>Cycle time when idling vacío:</b>	44 s	<b>Type of consumables:</b>	Wire
<b>Volume throughput in idle operation (theor.):</b>	137 m <sup>3</sup> /h	<b>Press material:</b>	Plastic film, Mixed paper, Cardboard, Big Bags, Polystyrene, Tyres
<b>Loading aperture width x Loading aperture length:</b>	800 x 2100 mm		

### Product information



Specially designed to compact tyres



Suitable for continuous loading with conveyor belt or similar




Safeguarding of the operating area with protective grid for maximum operator safety



### Counterplate

Hydraulic counterplate for bale removal ensures optimum operating convenience and safety.

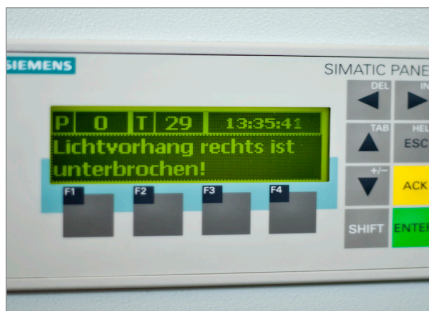

### Display and PLC

Multilingual operational guidance and Stored-program controller PLC.



### Loading flaps

Hydraulic loading flap for maximum operating comfort.



### Easy cleaning and servicing

The unique design and controllable positioning of the press ram allows for easy cleaning and servicing.



### Automatic bale ready signal

Automatic information as soon as enough material for a bale has been compressed and the bale can be tied.



### Strapping

Manual bale strapping with continuous polyester tape. (HL 3521 S optionally also with eyelet wire or tape)

