

# HSM V-Press 504



## HSM V-Press 504 vertical baling press

The entry-level model HSM V-Press 504 allows for the eco-nomical disposal of your packaging waste.

### Technical data

|                                                      |                        |                                                |                                      |
|------------------------------------------------------|------------------------|------------------------------------------------|--------------------------------------|
| <b>Order number:</b>                                 | 6151151                | <b>Loading aperture width x height:</b>        | 700 x 470 mm                         |
| <b>EAN</b>                                           | 4026631074421          | <b>Bale length x Bale width x Bale height:</b> | 700 x 600 x 500 mm                   |
| <b>Pressing power:</b>                               | 40 kN                  | <b>Bale weight:</b>                            | 60 kg                                |
| <b>Specific pressing power:</b>                      | 11,2 N/cm <sup>2</sup> | <b>Width x Depth x Height:</b>                 | 1020 x 812 x 1922 mm                 |
| <b>Driving power:</b>                                | 1,1 kW                 | <b>Weight:</b>                                 | 290 kg                               |
| <b>Voltage / Frequency:</b>                          | 230 V / 50 Hz          | <b>Related product line:</b>                   | V-Press                              |
| <b>Cycle time when idling vacío:</b>                 | 27 s                   | <b>Type of consumables:</b>                    | Strapping tape                       |
| <b>Volume throughput in idle operation (theor.):</b> | 3,75 m <sup>3</sup> /h | <b>Press material:</b>                         | Plastic film, Mixed paper, Cardboard |
| <b>Loading height:</b>                               | 661 mm                 |                                                |                                      |

### Product information



Bale removal and transport with discharge trolley



HSM TCS (Torsion Control System) for monitoring press ram movement



Modern microprocessor controller with membrane keypad and text display




### Compresses cardboard and film

Suitable for cardboard as well as film.



### Automatic start

Automatic start of the pressing process after closing the door.

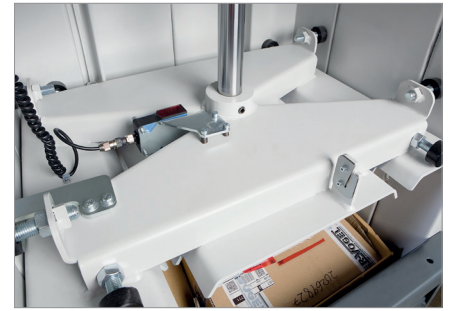

### Optimized pressing

Massive press ram and extremely robust press plate guidance.



### Double door

To fill the press, the upper half of the doors is swung to the right.




### Bell-crank lever

Bell-crank lever for quick and safe opening of the door.



### Strapping

Manual bale strapping with continuous polyester tape.



[www.tuev-sued.de/ps-zert](http://www.tuev-sued.de/ps-zert)



HSM V-Press 503



HSM V-Press 504

[www.hsm.eu](http://www.hsm.eu)

**HSM®**