



HSM V-Press 503 eco

HSM V-Press 503 vertical baling press eco

Easy installation and operation make the HSM V-press 503 eco as the ideal model for small material volumes.


Technical data

Order number:	6154104	Bale length x Bale width x Bale height:	700 x 500 x 850 mm
EAN	4026631073387	Bale weight:	50 kg
Pressing power:	30 kN	Noise level (idle operation):	ca. 68 dB(A)
Specific pressing power:	8,5 N/cm ²	Width x Depth x Height:	953 x 679 x 1962 mm
Voltage / Frequency:	230 V / 50 Hz	Weight:	250 kg
Cycle time when idling vacío:	30 s	Type of consumables:	Strapping tape
Volume throughput in idle operation (theor.):	3,13 m ³ /h	Press material:	Plastic film, Mixed paper, Cardboard
Loading aperture width x height:	700 x 505 mm		

Product information



Bale removal and transport with discharge trolley



Microprocessor controller with membrane keypad



Low installation height and small footprint

HSM®




Compresses cardboard and film

Suitable for cardboard as well as film.



Automatic start

Automatic start of the pressing process after closing the door.

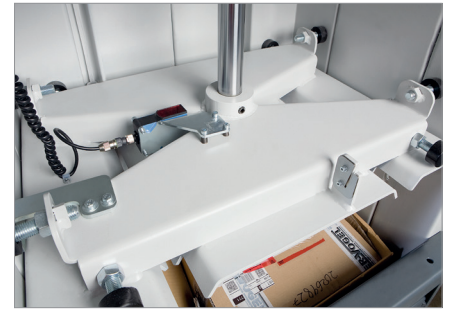

Optimized pressing

Massive press ram and extremely robust press plate guidance.



Double door

To fill the press, the upper half of the doors is swung to the right.




Bell-crank lever

Bell-crank lever for quick and safe opening of the door.



Strapping

Manual bale strapping with continuous polyester tape.



www.tuev-sued.de/ps-zert



HSM V-Press 503



HSM V-Press 504

www.hsm.eu

HSM®