


Linear Heißkanal zu Systemanwendung Standard

*Linear hot runner for
system application
Standard*

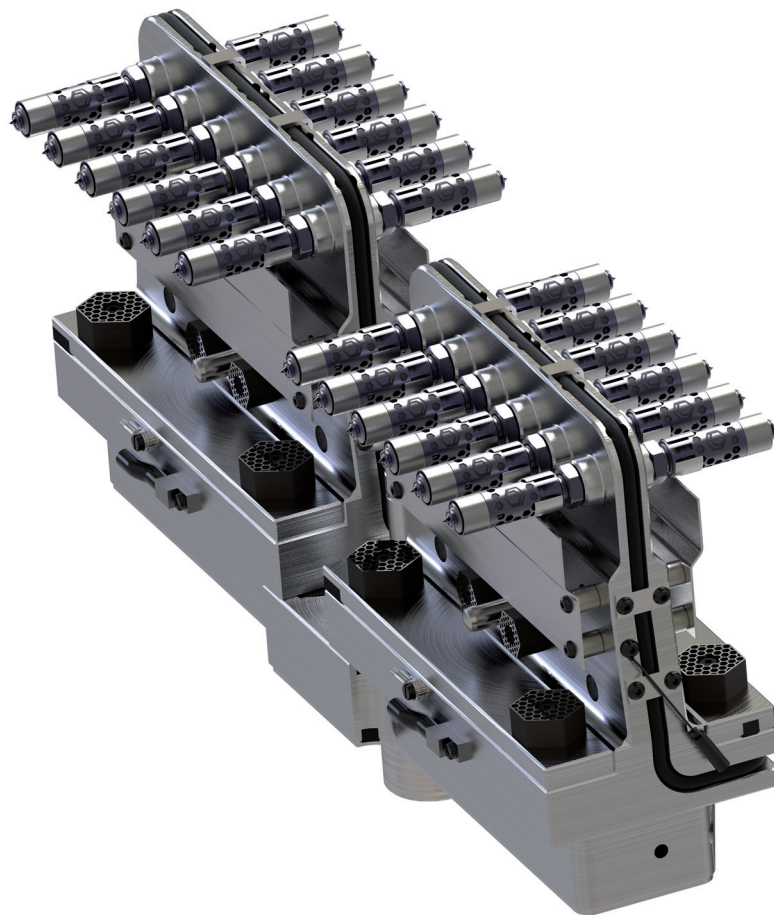

Version 24.03

Änderungen vorbehalten

Version 24.03

We reserve the right to make changes

Standard Linear

Standard Linear




Das Standard Linearsystem ist für die seitliche Anbindung geeignet.
The Standard linear system is suitable for side gating.

HINWEISE:

- 100%ige Leckagesicherheit durch Verschraubung aller Düsen mit dem Verteiler
- optimale Temperaturführung, aufgrund einer separaten Heizung sowie eines Thermofühler je Düse
- hydraulisch vollbalanciert
- lieferbar als Heiße Seite
- wartungsfreundlich, da Spitzenwechsel bei aufgeheiztem System auf der Maschine möglich
- Düsendrößen Ø14, Ø16 und Ø20 möglich, hierzu siehe Kapitel Systemdüsen

NOTE:

- 100% leakage protection because all nozzles are screwed with manifold
- optimum temperature conduction, one separate heater and a thermocouple per nozzle
- hydraulically fully balanced
- available as hot half
- designed for easy to maintain, since tips can be changed on the machine if the system is heated up
- Nozzle diameters 14, 16 and 20mm possible, please look at nozzle Chapter system nozzles

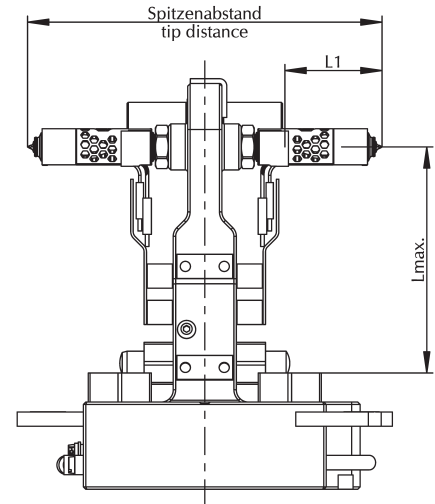

	Beschichtet / C Coated / C	Beschichtet / C Coated / C
2-Loch (Standard) 2-hole (Standard)	●	●
1-Loch 1-hole	●	●
3-Loch 3-hole	●	●

Spitzenabstand tip distance	130	146	166	186	206
L max.	70	80	100	120	140
L1	31,5	40	50	60	70
DS-14	●	●	●	●	●
DS-16	●	●	●	●	●
DS-20		●	●	●	●
MONOLITH®-11		●	●	●	●
MONOLITH®-16		●	●	●	●
MONOLITH®-20		●	●	●	●

DS-
Spitzendichtung
beengter Einbau
Tip seal,
cramped installation



Monolith®
Spitzendichtung
offen
Tip seal,
open



Düsenspitzen

Nozzle tips



-Torpedospitze
(Standard)
-Torpedo tip
(standard)




-EVO-RS Spitze
(E)
-EVO-RS tip
(E)



-offene Spitze
(O)
-Open tip
(O)

Linear Einbauhinweise

Linear installation instructions

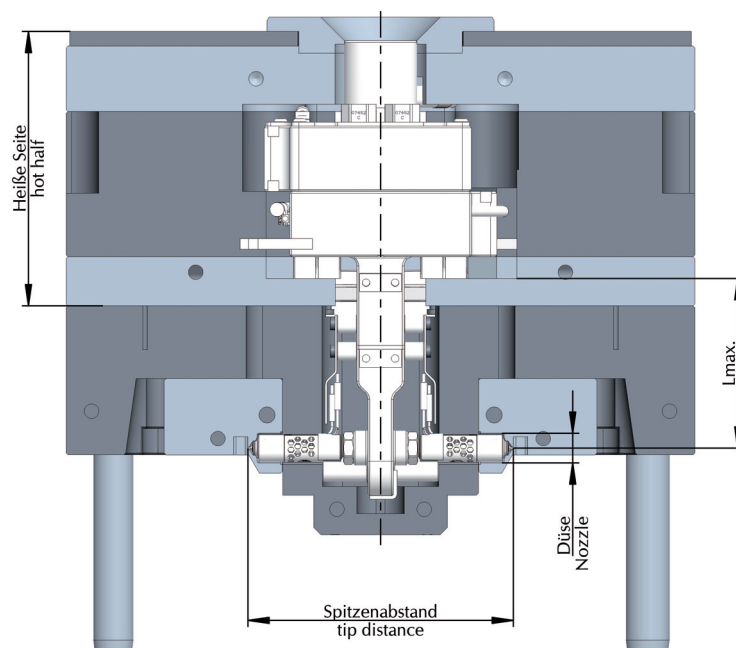

Ansicht X
View X

Detaillierte Einbauhinweise für Ihren Anwendungsfall erhalten Sie auf Anfrage.
You can receive detailed installation instructions for your application on request.

Alle Angaben in mm
All specifications in mm

Oberfläche, wenn nicht anders angegeben: RA2,3 oder VDI3400 Ref.27
Surface, if not specified otherwise: RA2.3 or VDI3400 Ref. 27


CAD-Daten zu unseren Standard-Produkten finden Sie in den üblichen Formaten unter witosa.de
CAD data for our standard products can be found in common formats at witosa.de.

Linear Einbauhinweise


Linear installation instructions

Ansicht X
View X


4-fach System
4-cavity system

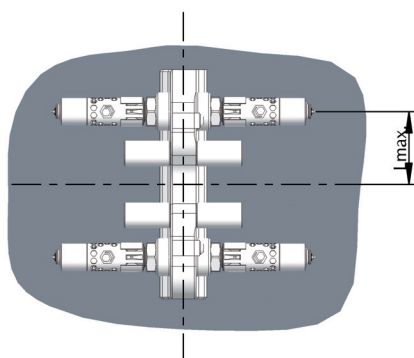


8-fach System
8-cavity system

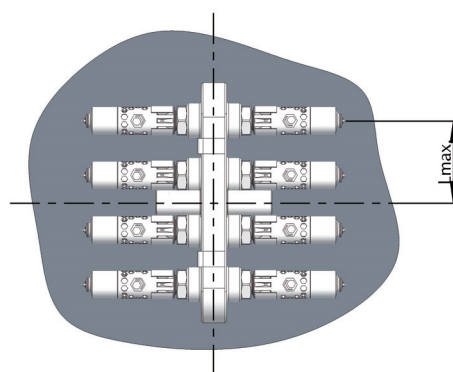

16-fach System
16-cavity system

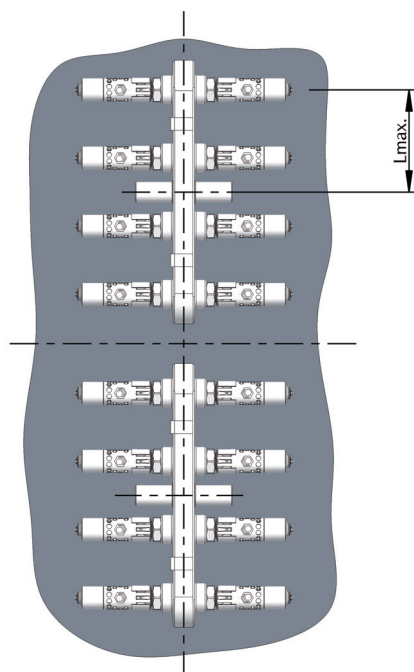

24-fach System
24-cavity system

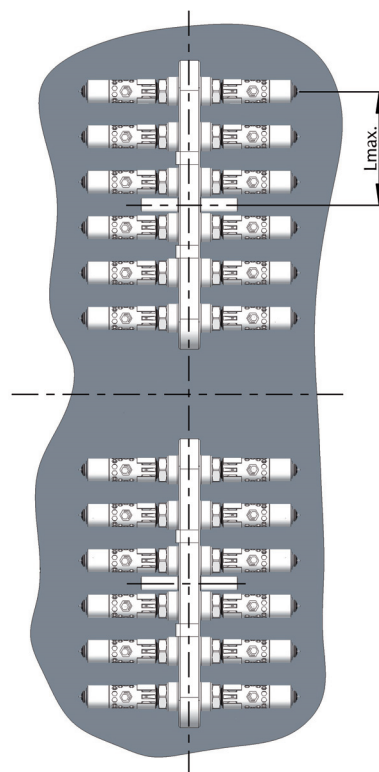

Alle Angaben in mm
All specifications in mm

Oberfläche, wenn nicht anders angegeben: RA2,3 oder VDI3400 Ref.27
Surface, if not specified otherwise: RA2.3 or VDI3400 Ref. 27

CAD-Daten zu unseren Standard-Produkten finden Sie in den üblichen Formaten unter witosa.de
CAD data for our standard products can be found in common formats at witosa.de.