

T4S RANGE

T4.55S | T4.75S



NEW HOLLAND T4S TRACTORS. SIMPLY MODERN.

New Holland T4S 55hp and 75hp tractors deliver the perfect balance between modern efficiency and the demands for a simple tractor that just does exactly what you need. Four-wheel drive delivers added traction for even greater versatility. Need a cab? T4S tractors are offered with a new generation four-post cab that delivers the best all round visibility and operator environment in this tractor class. Available with mechanical 8x8 (T4.55S) or 12x12 (T4.75S) transmissions, a T4S offers the specification choice to suit farmyard, or field, hobby farm or hay and forage enterprises.

Need a loader? Loader work is a breeze with a standard powershuttle for clutch free changes between forward and reverse. A quality quick-hitch, quick release loader is standard with impressive cycle times. Do you work with rear mounted equipment? With a T4S you can benefit from class leading performance with Lift-O-Matic™ linkage control as standard. Servo assisted PTO engagement, with an easy to modulate soft start, comes as part of a tractor that is built to meet modern demands for efficiency and ease of operation with traditional simplicity and ease of maintenance.

EASE OF OWNERSHIP

T4S tractors are designed for hard work. All daily maintenance checks are quick and easy to make, so you'll spend more time doing what a T4S does best: working. Want more? How about fuel-efficient, turbo intercooled engines compliant with Tier III emissions standards? An easy-to-maintain 'powercore' air filter removes the extra dust thrown up by loader work - an often overlooked consideration.

ABSOLUTE DRIVING PLEASURE

The new generation four-post cab, with high comfort and a suspended seat, puts the operator in comfortable control. T4S cab tractors set new standards in this tractor class, with panoramic visibility of all implements. Powerful heating and air conditioning keep you comfortable in all seasons.

VERSATILITY


Compact and capable, with the hydraulic power shuttle transmission to suit loader and maneuverability needs, a T4S can be your one tractor solution. It is equally at home performing loader work in the yard to working a wide range of attachments in the paddock, park or taming a bush block. The T4S delivers versatility as standard.

POWER AND PRODUCTIVITY

The smooth running S8000 series engine packs an efficient and reliable power punch of up to 75hp with outstanding fuel economy and impressive torque characteristics. Offering the ideal balance between power, weight and size, a T4S is designed to offer dependable performance across a wide range of tasks. It is the power and productivity choice for small farms and dairy units, with a specification to suit applications as diverse as municipal works to estate and contract operations.





DON'T CONFUSE SIMPLE WITH BASIC.

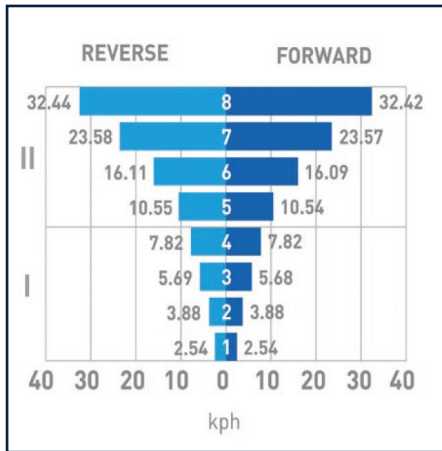

TWO WORKING RANGES

Ideally suited to small farm and dairy unit demands, the T4.55S utilises an 8x8 transmission which offers a broad speed selection.

Split into two ranges, with four speeds in each, the operator uses the foot clutch to change speeds on-the-go. The steering column mounted direction lever selects forward or reverse without using the foot clutch.

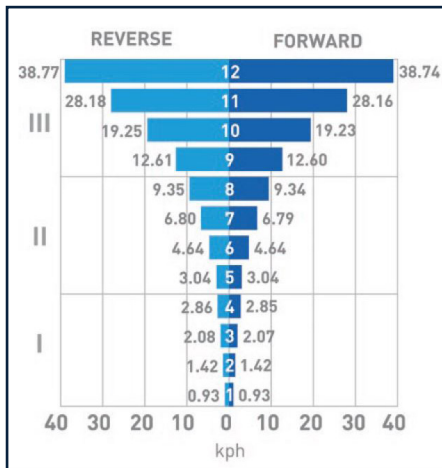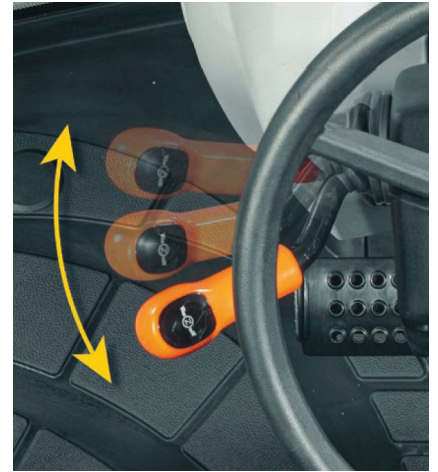

THREE RANGES, TWELVE WORKING SPEEDS

Applications calling for more power and a broader range of speeds have the 12x12 transmission as standard on the T4.75S.

Featuring four speeds in each of the three working ranges, this transmission retains the traditional 'H' shift pattern and column mounted direction lever across the T4S range.

LOADER FRIENDLY POWER SHUTTLE

T4S models are offered with a column mounted hydraulic power shuttle.

For front loader applications or speedy headland turns, the hydraulic power shuttle really boosts productivity.



EXCELLENT VISIBILITY

The factory fitted New Holland FL3.15 Master loader sits low and tight to the hood line to provide an excellent field of vision out over the front and sides. The horizontal exhaust exit removes the risk of damage and means no interruption to the operator's line of sight.



UP HIGH

The HiVis panel ensures a clear view of the loader bucket or attachment when fully raised for dumping into a mixer or stacking that last bale.

Models	T4.55S		T4.75S
Engine			
Capacity litres	2.9 litre		
Number of cylinders / Aspiration	3 cylinder / Turbo intercooled		
Rated engine hp @ 2300 rpm	55		75
Max Torque Nm @1400rpm	226		292
Fuel capacity	82 litres		
Transmission			
8 x 8 power shuttle (30kph)	•		
12 x 12 power shuttle (40kph)			•
Standard front axle			
4WD standard axle Standard	Standard		
Maximum steering angle (degrees)	45		
PTO			
540 / 540E rear PTO	Standard		
Operator environment cab			
Four pillar cab with air conditioning and heating	Standard		
High visibility loader panel	Standard		
Cab noise level	83 dB(a)		
Flat floor	Standard		
Suspension seat complete with with belt and armrest	Standard		
Tilt steering column	Standard		
Radio with Bluetooth	Standard		
Electrical			
Alternator (amp)	120		
Rotary beacon	Standard		
Hydraulic system			
Twin gear pump with open centre system	Standard		
Hydraulic pump flow	47.7 L/min		
Independent steering pump flow	29.0 L/min		
Total pump flow (inc steering)	76.7 L/min		
Rear remote valves	2 standard / 3rd optional		
Two mid-mount remote valves complete with joystick	Standard		
3-point linkage			
Mechanical draft control	Standard		
Lift-O-Matic™	Standard		
Maximum lift capacity	1950 kg @ 610mm behind ball ends		
Tractor only Dimensions			
Wheelbase (mm)	2,123		
Overall length (mm)	3,856		3,971
Cab height (mm)	1,845		
Min width (mm)	1,816		
Shipping Weight (kg)	3,300		

LOADER	T4.55S	T4.75S
Models	New Holland FL3.15 Master	
Technical data		
Joystick	Standard	
Lifting capacity from upper pivot point (kg)	1,720	
Maximum lift height @ pivot pin (mm)	3310	
Maximum lift height with level bucket (mm)	3040	
Dump clearance at 45° (mm)	2470	
Digging depth (mm)	155	
Maximum loading angle	42°	
Maximum emptying angle	60°	
Hitch		
Euro 1	Standard	



SCAN TO LEARN MORE