


SFM-M SERIES MULCHER



The COSMO BULLY™ SFM-M Series Mulcher suits tractors in the 30 to 70 horsepower range. It is used for managing vegetation in vineyards, orchards, pastures and other areas where prunings, undergrowth and grass need to be processed. The implement is designed to cut and mulch soft green fibrous scrub and vegetation to 50mm in diameter, and dry hard material to 25mm thick.


A multi-position bolted tower allows the implement to be offset, supporting use along fence lines, under trees or between rows. A 70 horsepower transmission drives the rotor at 2,453rpm, powering hammer flails suited to heavier vegetation. Y-flails are available as an alternative for grassy conditions where a finer mulch is preferred.

The implement includes height-adjustable skids and a height-adjustable rear roller, allowing the operator to set cutting height to suit terrain and mowing conditions.

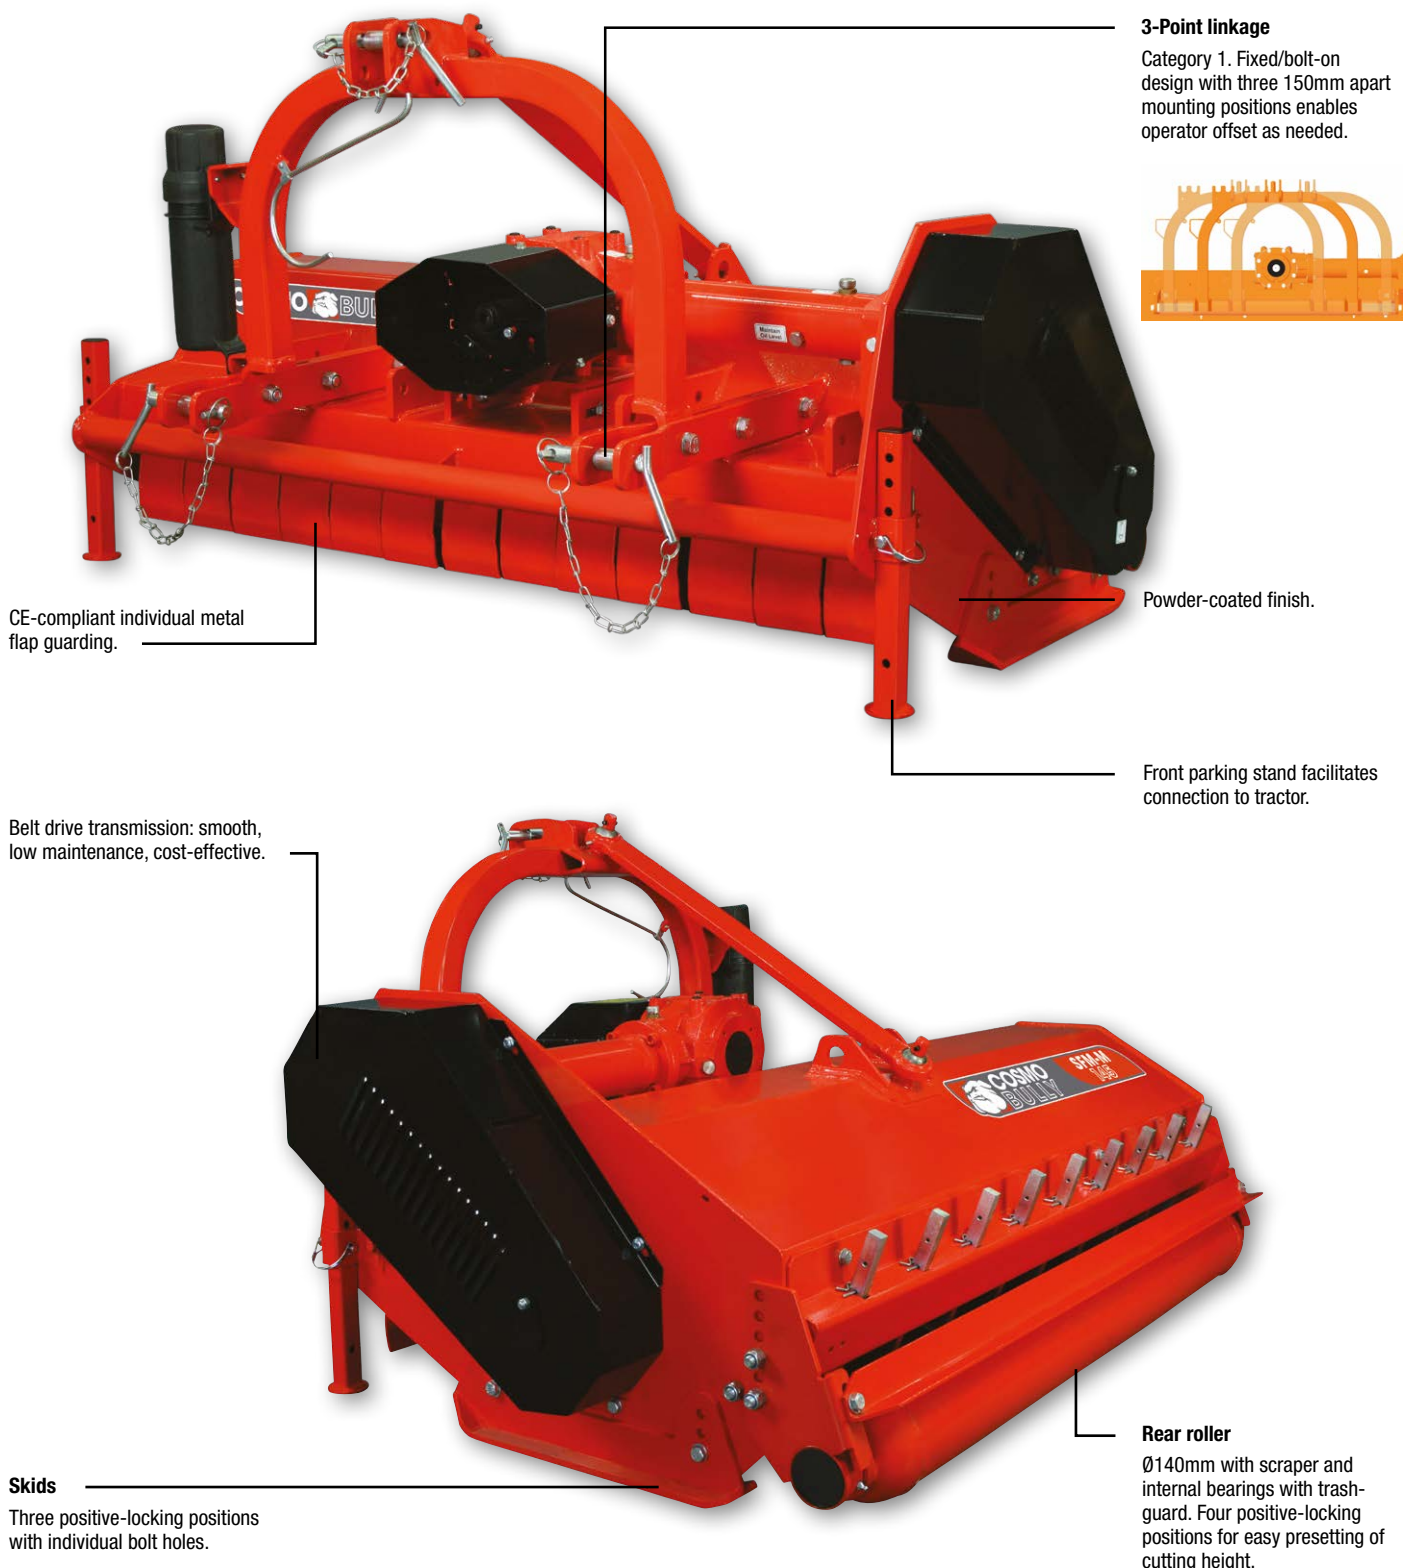



The spacious cutting chamber includes an internal serrated bar to help retain material for finer processing. Height-adjustable mulching rakes hold larger prunings in the chamber and can be removed to reduce horsepower requirements, increase operating speed and discharge a coarser mulch.

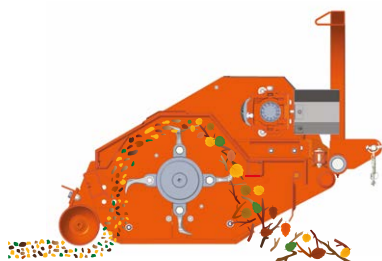


Rakes OUT

With rakes removed, the material is discharged at a faster rate and is more coarse.



Rakes IN

Height-adjustable mulching rakes retain material in the cutting chamber for finer mulching by the hammers.

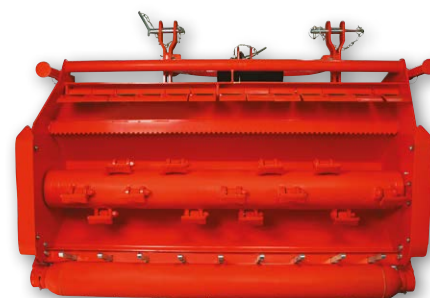

Large cutting chamber

A Ø380mm rotor swing diameter creates a spacious cutting chamber, accommodating a large volume of material. An internal serrated bar helps capture material to be finely mulched before discharge.

Code	TSFM130M	TSFM145M	TSFM160M
Size reference	1.3m 4'3" 51"	1.45m 4'9" 57"	1.6m 5'3" 63"
Tractor range (hp)	30 - 70 25 - 58 @ PTO	35 - 70 29 - 58 @ PTO	40 - 70 33 - 58 @ PTO
Belts	Four (4) XPB type		
Gearbox	70hp, 540rpm with freewheel		
PTO shaft	Series 4		
Rotor	speed 2453rpm swing Ø380mm shaft Ø160mm		
Type of flail	Hammer standard Y-flail blades optional		
No. of flails	16 32	18 36	20 40
Flail speed	9645ft/min 49.0m/s		
Overall width (mm)	1480	1620	1770
Working width (mm)	1300	1450	1600
Cutting height (mm)	20 - 105		
Weight (kg)	366	388	412
Price			