



Tumble dryer

T108HBW

Energy efficiency class: C

Classic

Series 1

Capacity: 8 kg

Condenser with heat pump

Number of programmes: 10

Installation: Freestanding



Construction and performance

- Inner drum: Stainless Steel
- Motor: Asynchronous motor
- Heating system: Heat pump
- Drying types: Sensor or time controlled
- Drum size: 117 l
- Shortest program time: 30 min
- Easy to use lint filter: Yes, Asko double lint filter

Use and flexibility

- Water tank volume: 6.5 l
- Automatic programs: Yes
- Door opening diameter: 340 mm
- Door maximum opening angle: 180 °
- Sensors: Moisture sensor
- Auto condenser filter cleaning: No
- Load Light™ - Illumination of the drum: No

Interaction and control

- Remaining time indication: Yes
- Type of display: LCD
- Indication when program is ready: Yes
- Available languages in control unit: US English, Serbian, Swedish, Slovenian, Slovak, Russian, Polish, Norwegian, Dutch, Latvian, Lithuanian, Japanese, Italian, Croatian, French, Finnish, Estonian, Spanish, English, German, Danish, Czech, Portuguese, AU English

Programs and options

- Number of programmes: 10
- Drying programs: Wool, Time program, Bedding, AirRefresh, Cotton storage, Cotton iron, Delicate, Cotton eco, Synthetics, Mixed laundry
- Settings: Low temperature option, Load level setting, Delayed start, Setting of dryness level, Timed drying, Anti-crease function, Half load, Pause

Design and integration

- Door hinge placement: Right/Left
- Adjustable feet: 15 mm
- Easy mounting of ASKO dryer on top of the washers: Yes
- Loading type: Front load

Safety and maintenance

- Child lock on display: Yes
- Overheat protection: For motor and electronics

Technical data

- Acoustic noise emission Eco: 63 dB(A)


- Duration of Eco (Tt): 115 min
- Energy consumption per 100 cycles: 101 kWh
- Average condensation efficiency at full load (Cdry): 88 %
- Noise level drying class: B
- Energy efficiency class: C
- Condensation efficiency class: B
- Plug type: Euro
- Connected load: 700 W
- Voltage (V): 220-240 V
- Number of phases: 1
- Fuse: 10 A
- Frequency: 50 Hz
- Net weight: 51 kg
- ISO 14001 certified manufacturing: Yes

Dimensions

- Width: 595 mm
- Height: 850 mm
- Depth: 630 mm
- Depth with door open: 1080 mm
- Length of electrical cord: 2100 mm

Logistic information

- Packaging width: 636 mm
- Packaging height: 920 mm
- Packaging depth: 743 mm
- Gross weight: 55.5 kg
- Product code: 746365
- EAN code: 3838783002297

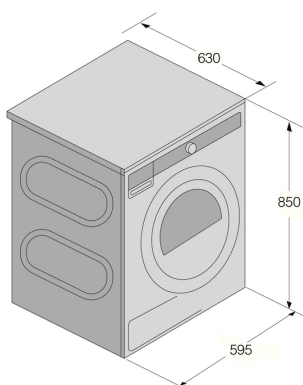

TD%St/Heat pump

