


NDA-8000-CND Conduit adapter, 4 pcs

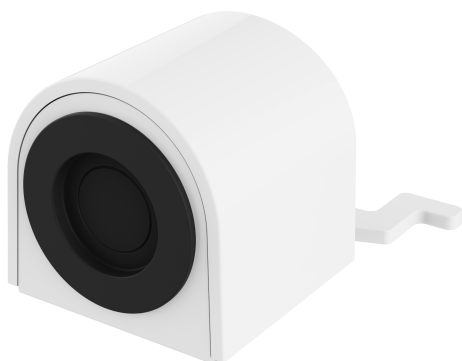

- Includes M25 (3/4") and a M20 (1/2") plate
- IK10 impact rating
- Compatible with FLEXIDOME 8100i and FLEXIDOME 8100i IR cameras

The NDA-8000-CND conduit adapter includes both a M25 (3/4") plate and a M20 (1/2") plate, allowing the installation of FLEXIDOME 8100i and FLEXIDOME 8100i IR cameras.

Each box contains four adapter pieces, which can support up to four cameras.

The conduit adapter is placed directly into the designated area of the mounting plate that is supplied with the camera.


Regulatory information

Environmental

Environmental test EN 50130-5:2011

Impact IK10

Installation/configuration notes

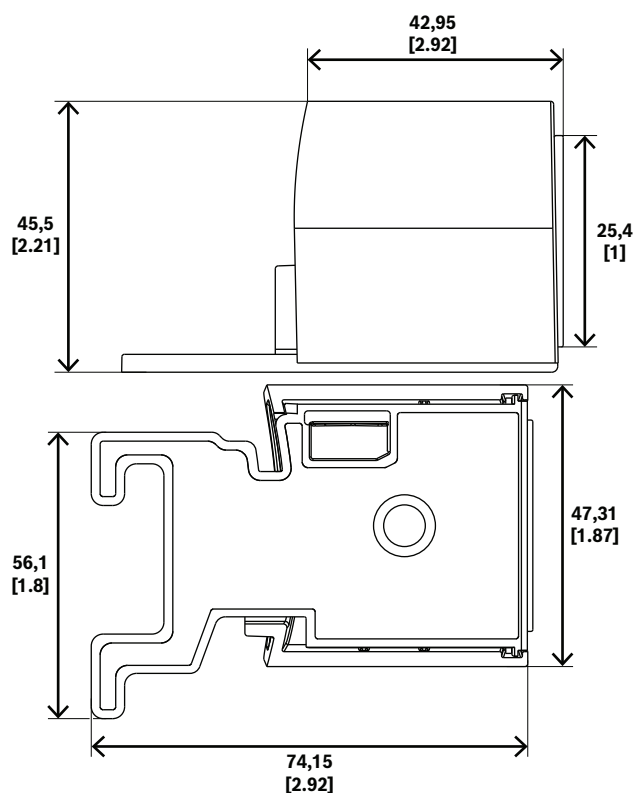

Dimensions in mm (inch)

Parts included

Quantity	Component
4	Conduit adapter

Quantity	Component
4	M25 3/4" plate
4	M20 1/2" plate
4	<20mm grommet

Technical specifications

Mechanical

Dimensions (H x W x D) (mm)	45.5 mm x 47.31 mm x 74.15 mm
Dimensions (H x W x D) (in)	2.21 in x 1.87 in x 2.92 in
Dimensions (Ø x D) (mm)	25.4 mm x 74.15 mm
Dimensions (Ø x D) (in)	1 in x 2.92 in
Weight (g)	50 g
Weight (lb)	0.11 lb
Material	Polycarbonate
Color (RAL)	RAL 9003 Signal white
Color	White

Ordering information

NDA-8000-CND Conduit adapter, 4 pcs

Conduit adapter for cameras, 4 pcs

Order number **NDA-8000-CND**



<https://www.boschsecurity.com>