

## NDM-7702-A Fixed dome 12MP 3.7-7.7mm IP66

### FLEXIDOME multi 7000i



- ▶ Four 3 MP imagers at 30 fps in one camera on a single IP address
- ▶ Easy and flexible installation with four motorized zoom/focus lenses
- ▶ High Dynamic Range (HDR) to see every detail in both bright and dark areas of the scene
- ▶ IVA Pro brings highly reliable deep-learning based detection of persons and vehicles to scenes ranging from sterile zones to crowded and congested

The FLEXIDOME multi 7000i camera is built for high-quality performance, featuring four independent imagers with motorized zoom/focus lenses. It helps to simplify installation and lower costs while maintaining flexibility in coverage. With four scenes simultaneously in a single camera, it is perfect for wide area coverage, traffic intersections and building corners. When the lenses are tilted at the right angle, the camera can even cover an area up to full 360°. Additionally, the zoom capability allows the camera to obtain detailed coverage for more distant areas. The cameras have a powerful, embedded processor with dedicated hardware to support advanced machine learning and deep neural network-based Video Analytics. Built-in Intelligent Video Analytics Pro (IVA Pro) enriches full situational awareness and triggers relevant alerts.

#### Functions

##### 12-megapixel multi-directional overviews

Four independent 3-megapixel imagers with separate remote zoom and focus lenses capture very high-quality images with a total resolution of 12 megapixels. Each of the four imagers can be set-up flexibly with 3-axis movement along a circular track. This enables surround coverage, capturing detailed images from every angle for comprehensive video coverage with four separate views from a single IP address.

##### High Dynamic Range

The camera has High Dynamic Range. This is based on a multiple-exposure process that captures more details in the highlights and in the shadows even in the same scene. The result is that you can easily distinguish objects and features, for example, faces with bright backlight. The actual dynamic range of the camera is measured using Opto-Electronic Conversion Function (OECF) analysis according to IEC 62676 Part 5. This method is used to provide standardized measurements, which can be used to compare different cameras.

##### H.265 high-efficiency video encoding

The camera is designed on the most efficient and powerful H.264 and H.265/HEVC encoding platform. The camera is capable of delivering high-quality and high-resolution video with very low network load. With a doubling of encoding efficiency, H.265 has become the new compression standard of choice for IP video surveillance systems.

##### Two-way audio and built-in microphone

Two-way audio allows the operator to communicate with visitors or intruders via an external audio line input and output. Alternatively, there is an integrated microphone to capture crisp and clear audio. By using the integrated or external microphone, audio detection can be used to generate alarms to alert the security operator quicker and act more proactively. If required by local laws, the microphone can be disabled.

### Intelligent Video Analytics Pro (IVA Pro)

The camera comes with IVA Pro Building and IVA Pro Perimeter pre-installed and brings highly reliable deep-learning based detection and tracking of persons and vehicles to scenes ranging from sterile zones to crowded and congested. Being extremely resistant to false triggers caused by challenging environments with rain, wind (moving trees), snow, hail, and water reflections as well as shadows and bugs, it reliably detects, tracks, and classifies objects. A smart set of alarm and counter rules allows to alert you when predefined alarms are triggered, and to forensically search with high efficiency through recordings. Configuration effort is minimized and made easy by removing the need for calibration.

### DORI coverage

DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The maximum distance at which a camera/lens combination can meet these criteria is shown below:

#### 12 MP camera with 3.7 - 7.7 mm lens\*

| DORI      | DORI definition        | Distance<br>3.7 mm/7.7 mm     | Horizontal width |
|-----------|------------------------|-------------------------------|------------------|
| Detect    | 25 px/m<br>(8 px/ft)   | 45 m/117 m<br>(148 ft/384 ft) | 82 m<br>(256 ft) |
| Observe   | 63 px/m<br>(19 px/ft)  | 18 m/46 m<br>(59 ft/151 ft)   | 33 m<br>(108 ft) |
| Recognize | 125 px/m<br>(38 px/ft) | 9 m/23 m<br>(31 ft/75 ft)     | 16 m<br>(54 ft)  |
| Identify  | 250 px/m<br>(76 px/ft) | 4 m/12 m<br>(13 ft/39 ft)     | 8 m<br>(27 ft)   |

\*The numbers in this table do not reflect IVA distances. For IVA distances, refer to the Design Hub.

### Scene modes

Multiple configurable modes are provided with the best settings for a variety of applications. In one click fully optimized image settings can be selected to suit the conditions. Different scene modes can be selected for different situations such as sodium lighting, fast moving objects, or dark environments.

### Resists rain, dust, and tampering with reliable operation across a wide temperature range

Suitable for indoor and outdoor usage.

The robust design of the camera is rated to IP66 and IK10 standards, safeguarding the camera against rain and dust while also offering protection against vandalism and tampering.

The camera can operate in a wide ambient temperature range between -50 °C up to +55 °C / -58 °F up to 131 °F.

### Easy installation

With the multi-imager camera, it is only necessary to install one camera, pull one cable, configure one IP address, and acquire one video management software (VMS) license (applicable for most common VMS, including BVMS 11.1 or higher), while having the benefit of using four cameras.

The mechanical design follows the Bosch installation philosophy by using an installation mount plate and easy cable management.

Power can be supplied via Power-over-Ethernet. With this configuration, only a single cable connection is required to view, power, and control the camera. Using PoE makes installation easier and more cost-effective, as cameras do not require a local power source.

### Modular accessories

A full line of modular accessories is available that allows a consistent design across different cameras and a wide range of installation possibilities. Available options include wall or pipe mount, a surveillance cabinet with power and fiber optic options. There is also a conduit adapter available for installations on concrete walls.

### Data security

Special measures have been put in place to ensure the highest level of security for device access and data transport. The three-level password protection with security recommendations allows users to customize device access. Web browser access can be protected using HTTPS and firmware updates can also be protected with authenticated secure uploads. The cameras have built-in Secure Element (SE) hardware providing main Trusted Platform Module (TPM) functionality to ensure the highest levels of data security and privacy protection. Together with Public Key Infrastructure (PKI) support, superior protection from malicious attacks is guaranteed. It also supports 802.1x network authentication with EAP/TLS and RSA encryption key lengths of up to 4096 bits, ensuring data safety beyond 2030. The advanced certificate handling offers:

- Bosch origin device certificate pre-installed
- Self-signed unique certificates automatically created when required
- Client and server certificates for authentication
- Client certificates for proof of authenticity
- Certificates with encrypted private keys
- Bosch origin device certificate pre-installed

### Edge recording

Insert a memory card into the card slot to store up to 2 TB of local alarm recording. Pre-alarm recording in RAM reduces recording bandwidth on the network, and extends the effective life of the memory card.

It has advanced edge recording providing a reliable storage solution possible due to the combination of these functions:

- Industrial SD card support allows for extreme lifetime
- Health monitoring of industrial SD cards provide early service indications.

#### System integration and ONVIF conformance

The camera conforms to the ONVIF Profile S, ONVIF Profile G, ONVIF Profile M, and ONVIF Profile T specifications. For H.265 configuration, the camera supports Media Service 2, which is part of ONVIF Profile T. Compliance with these standards guarantees interoperability between network video products regardless of manufacturer.

Third-party integrators can easily access the internal feature set of the camera for integration into large projects. Visit the Bosch Integration Partner Program (IPP) website ([ipp.boschsecurity.com](http://ipp.boschsecurity.com)) for more information.

#### Cloud-based services

The camera supports time-based or alarm-based JPEG posting to four different accounts. These accounts can address FTP servers or cloud-based storage. Video clips or JPEG images can also be exported to these accounts. Alarms can be set up to trigger an e-mail or SMS notification so you are always aware of abnormal events.

#### Bosch Remote Portal

With the secure cloud infrastructure, Remote Portal, you can manage your connected Bosch devices. From the Remote Portal you can:

- Complete initial configuration of your connected Bosch devices (online or offline).
- Update firmware for single or multiple devices.
- Manage certificates.
- Monitor the health of your connected Bosch devices.

#### Project Assistant app

As the camera is equipped with a USB-C port for a wireless USB dongle (sold separately: NCA-WLAN-EU, NCA-WLAN-NA), the installer can easily perform the initial configuration wirelessly. Using a mobile device with the Bosch Project Assistant app, you can do initial set-up and lens zoom-focus to find the right scene. Simply connect the wireless USB dongle and go to the Bosch Project Assistant app, available for iOS, Windows, or Android.


| Standard           | Type                                                                                                                                                     |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environmental      | EN50130-5, Class IV, Fixed equipment, Outdoor in general<br>EN IEC 63000: 2018<br>RoHS EU, 2011/65/EU and 2015/863/EU<br>WEEE EU, 2012/19/EU             |
| Safety             | EN 62368-1<br>EN 60950-22<br>UL 62368-1 and UL 60950-22<br>IEC 62368-1 and IEC 60950-22<br>CAN/CSA-C22.2 No. 62368-1-14<br>CAN/CSA-C22.2 No. 60950-22-17 |
| Image performance  | IEC 62676-5                                                                                                                                              |
| ONVIF conformance  | EN 50132-5-2, EN 62676-2                                                                                                                                 |
| Impact protection  | EN 62262 (IK10)                                                                                                                                          |
| Ingress protection | EN 60529 (IP66) and UL50E (NEMA Type 4X)                                                                                                                 |
| Marks              | CE, FCC, UL, WEEE, RCM, VCCI, CMIM, UKCA, China RoHS, EAC, BIS                                                                                           |

| Region        | Regulatory compliance/quality marks |                                                |
|---------------|-------------------------------------|------------------------------------------------|
| Europe        | CE                                  | FLEXIDOME multi 7000i                          |
| USA           | UL 2900-2-3 CAP                     | 4791462681-003 Cybersecurity Assurance Program |
| Global        | IEC 62443-4-1                       | Industrial Cyber Security Capability           |
| Great Britain | UKCA                                | FLEXIDOME multi 7000i                          |

#### Regulatory information

| Standard | Type                                               |
|----------|----------------------------------------------------|
| Emission | EN 55032 (Class A)<br>CFR 47 FCC part 15 (Class A) |
| Immunity | EN 50121-4<br>EN 50130-4                           |

## Installation/configuration notes

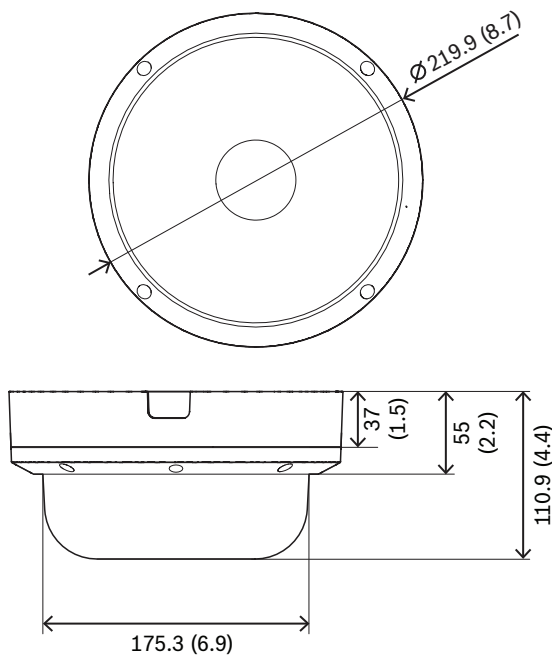

Dimensions in mm (inch)

## Parts included

| Quantity | Component                     |
|----------|-------------------------------|
| 1        | Camera                        |
| 1        | Mounting plate                |
| 1        | RJ-45 punch-through aid       |
| 1        | TR20 Allen key                |
| 1        | 2-pin power connector         |
| 1        | 8-pin Audio and I/O connector |
| 2        | M20 rubber grommets           |
| 1        | Quick installation guide      |
| 1        | Safety information            |
| 3        | Installer UX labels           |

## Technical specifications

| Power                                 |                                                                                                                                          |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Input voltage                         | PoE+ IEEE 802.3at Type 2, Class 4<br>24 VAC $\pm$ 10%<br>PoE and auxiliary power can be connected simultaneously for redundant operation |
| Power Consumption (typical / maximum) | PoE+: 10.6 W / 22.1 W                                                                                                                    |

| Power                                               |                                                                                                  |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------|
|                                                     | 24 VAC: 9.2 W / 17.6 W                                                                           |
| Sensor                                              |                                                                                                  |
| Sensor type                                         | 4x 1/2.7-inch CMOS                                                                               |
| Sensitivity                                         |                                                                                                  |
| Measured according to IEC 62676 Part 5 (1/25, F1.9) |                                                                                                  |
| Color                                               | 0.091 lx                                                                                         |
| Mono                                                | 0.012 lx                                                                                         |
| Dynamic range                                       |                                                                                                  |
| High Dynamic Range                                  | 120 dB WDR                                                                                       |
| HDR Measured according to IEC 62676 Part 5          | 101 dB WDR                                                                                       |
| Optical                                             |                                                                                                  |
| Lens                                                | 3.7 - 7.7 mm<br>F1.9                                                                             |
| Adjustment                                          | Motorized zoom/focus                                                                             |
| Day/Night                                           | Switchable IR-cut filter                                                                         |
| Viewing angle                                       | Wide: 85.1° x 62° (H x V)<br>Tele: 38.7° x 29.0° (H x V)                                         |
| Viewing angle (maximum combined)                    | Up to 360° coverage (depending on lens position and tilt)                                        |
| Platform                                            |                                                                                                  |
| Common product platform                             | CPP14.1                                                                                          |
| Memory                                              | 8192 MB RAM, 4096 MB Flash                                                                       |
| Video streaming                                     |                                                                                                  |
| Video compression                                   | H.265; H.264; M- JPEG                                                                            |
| Streaming                                           | Multiple configurable streams in H.264, H.265 and M-JPEG, configurable frame rate and bandwidth. |
| Camera latency                                      | 120 ms                                                                                           |
| GOP structure                                       | IP                                                                                               |
| Frame rate                                          | 1-30 fps                                                                                         |
| Signal-to-Noise Ratio (SNR)                         | >55 dB                                                                                           |
| Video resolution (H x V)                            |                                                                                                  |
| Max. resolution                                     | 4x 2048 x 1536 (4:3) @30 fps<br>4x 1920 x 1080 (16:9) @30 fps                                    |

| Video resolution (H x V)                                                                                  |                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Max. resolution corridor mode                                                                             | 4x 1536 x 2048 (3:4) @30 fps<br>4x 1080 x 1920 (9:16) @30 fps                                                                                                                                                   |
| Multiple lower resolutions available in 4:3 and 16:9 format individually selectable per stream and imager |                                                                                                                                                                                                                 |
| Image setup                                                                                               |                                                                                                                                                                                                                 |
| Mirror image                                                                                              | On / Off                                                                                                                                                                                                        |
| Rotate image                                                                                              | 0° / 90° / 180° / 270°                                                                                                                                                                                          |
| Positioning                                                                                               | Coordinates / Mounting height                                                                                                                                                                                   |
| Video functions                                                                                           |                                                                                                                                                                                                                 |
| White Balance                                                                                             | 2300 to 10000K, 3 automatic modes (Basic, Standard, Sodium vapor), Manual mode and Hold mode                                                                                                                    |
| Shutter                                                                                                   | Automatic Electronic Shutter (AES);<br>Fixed shutter (1/25[30] to 1/15000) selectable;<br>Default shutter                                                                                                       |
| Day/Night                                                                                                 | Auto (adjustable switch point), Color, Monochrome                                                                                                                                                               |
| Noise reduction                                                                                           | Dynamic noise reduction with 3 levels: Low, Medium and High                                                                                                                                                     |
| Scene modes                                                                                               | Multiple default modes with scheduler                                                                                                                                                                           |
| Privacy Masking                                                                                           | Eight independent areas per imager, fully programmable                                                                                                                                                          |
| Display stamping                                                                                          | Name; Logo; Time; Alarm message; fully programmable per imager                                                                                                                                                  |
| Additional functions                                                                                      | Contrast, Saturation level and control, Brightness, Sharpness, ALC level, Defog                                                                                                                                 |
| Video content analysis                                                                                    |                                                                                                                                                                                                                 |
| Analysis type                                                                                             | Intelligent Video Analytics Pro: IVA Pro Buildings;<br>Intelligent Video Analytics Pro: IVA Pro Perimeter                                                                                                       |
| Alarm triggers                                                                                            | Any object; Object in field; Line crossing; Enter / leave field; Loitering; Follow route; Idle / removed object; Counting; Occupancy; Condition change; Similarity search; Objects stopping or starting to move |
| Object filters                                                                                            | Duration; Size; Aspect ratio; Speed; Direction; Color; Object classes (4)                                                                                                                                       |
| Tracking modes                                                                                            | Ship tracking (2D); Museum mode; Perimeter tracking (2D); Perimeter tracking (3D); People tracking (3D); Base tracking (2D)                                                                                     |
| Object classes                                                                                            | Person; Car; Bike; Truck                                                                                                                                                                                        |
| Calibration                                                                                               | Automatic based on gyro sensor, focal length, and camera height                                                                                                                                                 |

| Video content analysis                          |                                                                                                                                                                                                                             |
|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of possible alarm rules (simultaneously) | 16 per imager                                                                                                                                                                                                               |
| Additional functions                            | Tamper detection                                                                                                                                                                                                            |
| Local storage                                   |                                                                                                                                                                                                                             |
| Internal RAM                                    | 5 s pre-alarm recording                                                                                                                                                                                                     |
| Memory card slot                                | Micro SDXC / SDHC / SD card                                                                                                                                                                                                 |
| Industrial SD cards                             | Extreme lifetime and health monitoring support (if supported by the SD card) that provides early service indication.                                                                                                        |
| Input/output                                    |                                                                                                                                                                                                                             |
| Audio line in                                   | 0.6 Vrms, 40 kOhm                                                                                                                                                                                                           |
| Audio line out                                  | 1.0 Vrms, 10 kOhm                                                                                                                                                                                                           |
| Microphone                                      | 1 integrated microphone (can be disabled)                                                                                                                                                                                   |
| Alarm input                                     | 1 input                                                                                                                                                                                                                     |
| Alarm input activation                          | Short or DC 5V activation                                                                                                                                                                                                   |
| Alarm output                                    | 1 output                                                                                                                                                                                                                    |
| Alarm output voltage                            | 30 VDC, max. load 0.5 A                                                                                                                                                                                                     |
| Ethernet                                        | RJ-45                                                                                                                                                                                                                       |
| USB                                             | USB 2.0 Type C, for use with wireless USB dongle for setup and commissioning                                                                                                                                                |
| Fiber optics (sold separately)                  | The Fiber Optic Ethernet Media Converter kit (VG4-SFPSCKT) installed inside a Surveillance Cabinet (NDA-U-PA0, NDA-U-PA1 or NDA-U-PA2) provides the fiber optic interface to the mounted camera.                            |
| Audio streaming                                 |                                                                                                                                                                                                                             |
| Standard                                        | G.711, 8 kHz sampling rate<br>L16, 16 kHz sampling rate<br>AAC-LC, 48 Kbit/s at 16 kHz sampling rate<br>AAC-LC, 80 Kbit/s at 16 kHz sampling rate                                                                           |
| Signal-to-Noise Ratio                           | >50 dB                                                                                                                                                                                                                      |
| Audio Streaming                                 | Full-duplex / half duplex                                                                                                                                                                                                   |
| Network                                         |                                                                                                                                                                                                                             |
| IP                                              | One IP address for all four imagers                                                                                                                                                                                         |
| Protocols                                       | IPv4, IPv6, UDP, TCP, HTTP, HTTPS, RTP/RTCP, IGMP V2/V3, ICMP, ICMPv6, RTSP, FTP, ARP, DHCP, APIPA (Auto-IP, link local address), NTP (SNTP), SNMP (V1, V3, MIB-II), 802.1x, DNS, DNSv6, DDNS (DynDNS.org, selfHOST.de, no- |

| Network                |                                                                                                                                                                                       |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | ip.com), SMTP, iSCSI, UPnP (SSDP), Diff-Serv (QoS), LLDP, SOAP, CHAP, digest authentication                                                                                           |
| Ethernet               | 10/100/1000 Base-T                                                                                                                                                                    |
| Interoperability       | ONVIF Profile S; ONVIF Profile G; ONVIF Profile M; ONVIF Profile T                                                                                                                    |
| Data security          |                                                                                                                                                                                       |
| Secure Element ("TPM") | RSA 4096 bit, AES/CBC 256 bit                                                                                                                                                         |
| PKI                    | X.509 certificates                                                                                                                                                                    |
| Encryption             | Full end-to-end encryption with supported VMS<br>Network: TLS1.2/1.3, AES128, AES256<br>Local storage: XTS-AES                                                                        |
| Video authentication   | checksum, MD5, SHA-1, SHA-256                                                                                                                                                         |
| Firmware protection    | Signed firmware, secure boot                                                                                                                                                          |
| Mechanical             |                                                                                                                                                                                       |
| Dimensions (D x H)     | 220 x 111 mm (8.7 x 4.4 in)                                                                                                                                                           |
| Weight                 | 2.1 kg (4.63 lbs)                                                                                                                                                                     |
| Color                  | White (RAL9003)                                                                                                                                                                       |
| Gyrosensor             | Yes, 1 per imager                                                                                                                                                                     |
| 4-axis lens adjustment | Pan: 0° to 360°<br>Rotate: -20° to 20°<br>Tilt: 0° to 105°<br>Roll: -90° to 90°                                                                                                       |
| Dome bubble            | Polycarbonate, clear with UV blocking anti-scratch coating                                                                                                                            |
| Housing                | Aluminum with waterproof connection area                                                                                                                                              |
| Mounting               | Mounting plate included for surface mount, 4-inch square junction box, single and double gang box                                                                                     |
| Conduit                | 3/4-inch NPT (M25) conduit side entry (sold separately)                                                                                                                               |
| Environmental          |                                                                                                                                                                                       |
| Operating temperature  | -50 °C to +55 °C (-58 °F to +131 °F) for continuous operation<br>-34 °C to +74 °C (-30 °F to +165 °F) according to NEMA TS 2-2003 (R2008), para. 2.1.5.1. using fig. 2.1 test profile |
| Storage temperature    | -40 °C to 70 °C (-40 °F to 158 °F)                                                                                                                                                    |
| Cold start temperature | -20 °C (-4 °F)                                                                                                                                                                        |
| Operating humidity     | 5% to 93% RH non condensing<br>100% RH condensing                                                                                                                                     |

| Environmental         |                       |
|-----------------------|-----------------------|
| Storage humidity      | Up to 98% RH          |
| Impact protection     | IK10                  |
| Water/dust protection | IP66 and NEMA Type 4X |

### Ordering information

#### NDM-7702-A Fixed dome 12MP 3.7-7.7mm IP66

12 MP multi-imager camera, four motorized zoom/focus lenses, 30 fps, IVA, H.265, IK10, IP66

NDAA compliant

Order number **NDM-7702-A**

### Accessories

#### NDA-7051-PIPW Pendant Interface Plate, 220mm

Pendant interface plate for FLEXIDOME multi 7000i

Order number **NDA-7051-PIPW**

#### NDA-7051-CA Conduit adapter M25 for NDM-770\*, 5pcs

Conduit adapter for FLEXIDOME multi 7000i and FLEXIDOME multi 7000i IR, 5 pieces

Order number **NDA-7051-CA**

#### NDA-U-WMT Pendant wall mount

Universal wall mount for dome cameras, white

Order number **NDA-U-WMT**

#### NDA-U-WMP Wall mount plate

Back plate for universal wall mount, corner mount and pole mount, white, IP66

Order number **NDA-U-WMP**

#### NDA-U-PMT Pendant pipe mount, 12" (31cm)

Universal pipe mount for dome cameras, 31 cm, white

Order number **NDA-U-PMT**

#### NDA-U-PMTE Pendant pipe extension, 20" (50cm)

Extension for universal pipe mount, 50 cm, white

Order number **NDA-U-PMTE**

#### NDA-U-PMTS Pendant pipe mount, 4" (11 cm)

Universal pendant pipe mount for dome cameras, 11 cm (4"), white

Order number **NDA-U-PMTS**

#### NDA-U-PSMB Pendant wall/ceiling mount SMB

Surface mount box (SMB) for wall mount or pipe mount.

Order number **NDA-U-PSMB**

#### NDA-U-PMAS Pole mount adapter small

Pole mount adapter small

Universal pole mount adapter, white; small.

Order number **NDA-U-PMAS**

#### NDA-U-PMAL Pole mount adapter large

Universal pole mount adapter, white; large

Order number **NDA-U-PMAL**

#### NDA-U-RMT Pendant parapet mount

Universal roof mount for dome cameras, white, for outdoor usage

Order number **NDA-U-RMT**



**NDA-U-CMT Corner mount adapter**

Universal corner mount, white

Order number **NDA-U-CMT****NDA-U-PA0 Surveillance cabinet 24VAC**

Surveillance cabinet, 24 VAC input, 24 VAC output, IP66

Order number **NDA-U-PA0****NDA-U-PA1 Surveillance cabinet 120VAC**

Surveillance cabinet, 100 - 120 VAC 50/60 Hz input, 24 VAC output, IP66

Order number **NDA-U-PA1****NDA-U-PA2 Surveillance cabinet 230VAC**

Surveillance cabinet, 230 VAC input, 24 VAC output, IP66

Order number **NDA-U-PA2****VG4-SFPSCKT Ethernet to SFP interface kit**

Ethernet media converter video transmitter/data receiver fiber optic kit for AUTODOME 7000i cameras and for the Surveillance cabinets (NDA-U-PA0, NDA-U-PA1 and NDA-U-PA2).

Order number **VG4-SFPSCKT****SFP-2 Fiber module, multimode, 1310nm, 2LC**

SFP Fiber Optic Module, 2 km (1.2 miles), 2 LC connectors.

Multi-mode

1310 nm

Order number **SFP-2****SFP-3 Fiber module, single-mode, 1310nm, 2LC**

SFP Fiber Optic Module, 20 km (12.4 miles), 2 LC connectors.

Single-mode

1310 nm

Order number **SFP-3****SFP-25 Fiber module, 1310/1550nm, 1SC**

SFP Fiber Optic Module, 2 km (1.2 miles), 1 SC connector

Multi-mode

1310/1550 nm

Order number **SFP-25****SFP-26 Fiber module, 1550/1310nm, 1SC**

SFP Fiber Optic Module, 2 km (1.2 miles), 1 SC connector

Multi-mode

1550/1310 nm

Order number **SFP-26****NDA-U-PMTG Pendant pipe mount, gang box**

Universal pipe mount, compatible with gang box installation for fixed dome cameras only, white

Order number **NDA-U-PMTG****NDA-U-WMTG Pendant wall mount, gang box**

Universal wall mount, compatible with gang box installation for fixed dome cameras only, white

Order number **NDA-U-WMTG****NPD-6001C Midspan, bt, 60W, indoor**

Indoor midspan with Power-over-Ethernet for use with PoE-enabled cameras; 60 W, single-port, AC input

Order number **NPD-6001C****MSD-064G IP SECURITY MICROSD CARD 64GB**

64 GB industrial microSD card with health status monitoring

Order number **MSD-064G****MSD-128G IP SECURITY MICROSD CARD 128GB**

128 GB industrial microSD card with health status monitoring

Order number **MSD-128G****MSD-256G IP SECURITY MICROSD CARD 256GB**

256 GB industrial microSD card with health status monitoring

Order number **MSD-256G****NCA-WLAN-EU Wireless installation dongle EU**

Wireless installation dongle for wireless commissioning

Order number **NCA-WLAN-EU****NCA-WLAN-NA Wireless installation dongle NA**

Wireless installation dongle for wireless commissioning for North America

Order number **NCA-WLAN-NA**