

CEILING AUDIO PREMIUM BUNDLE QUICK SETUP GUIDE

BSYS-EVID-C6.2-G2W

STEP 1

Set correct tap settings for EVID-C6.2-G2 speakers


- 1) The tap dial can be found behind the grille
- 2) For ease, make sure the tap settings on your speakers are set accordingly before installing
- 3) Reference chart below for recommended settings
- 4) Tap settings can be adjusted after installation

TAP SETTING	SPL @ 1 m / 3.3 ft
1.25 W	93 dB
2.5 W	96 dB
5 W	99 dB
10 W	102 dB
20 W	105 dB
8Ω	109 dB

RECOMMENDED TAP SETTING: 30 W

4 x 30 W = 120 W


Dynacord U120:1M = 120 W

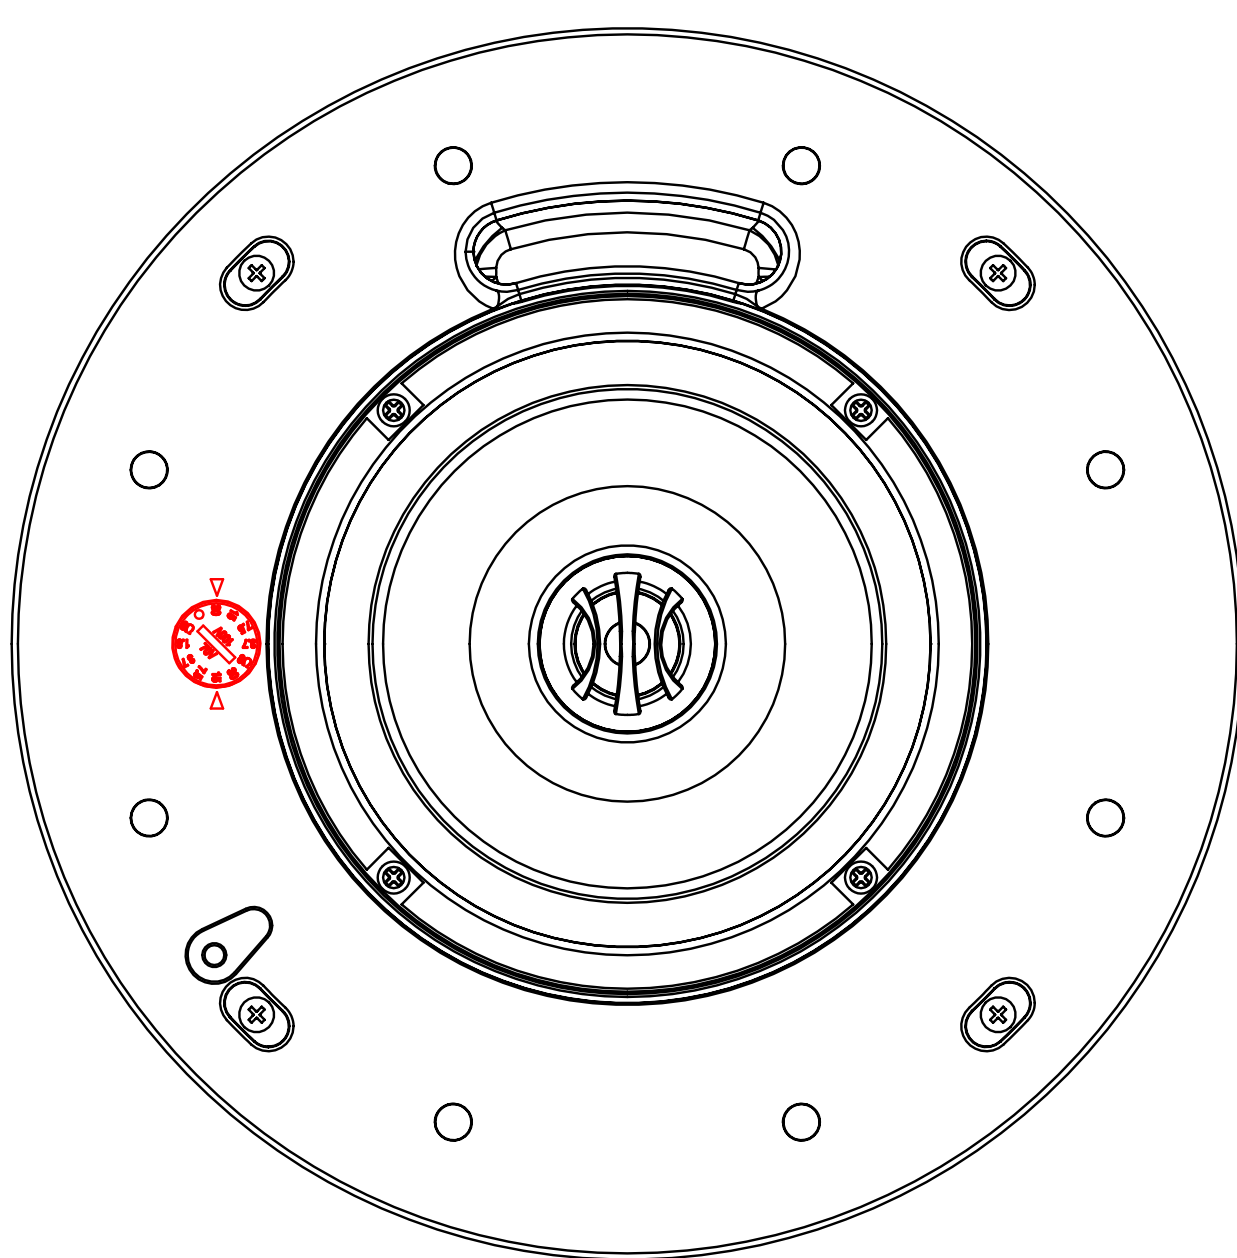

STEP 2

Wire your EVID-C6.2-G2 speakers


Recommended wire types: 18-12 AWG (.823 to 4.0 mm²) 2-conductor

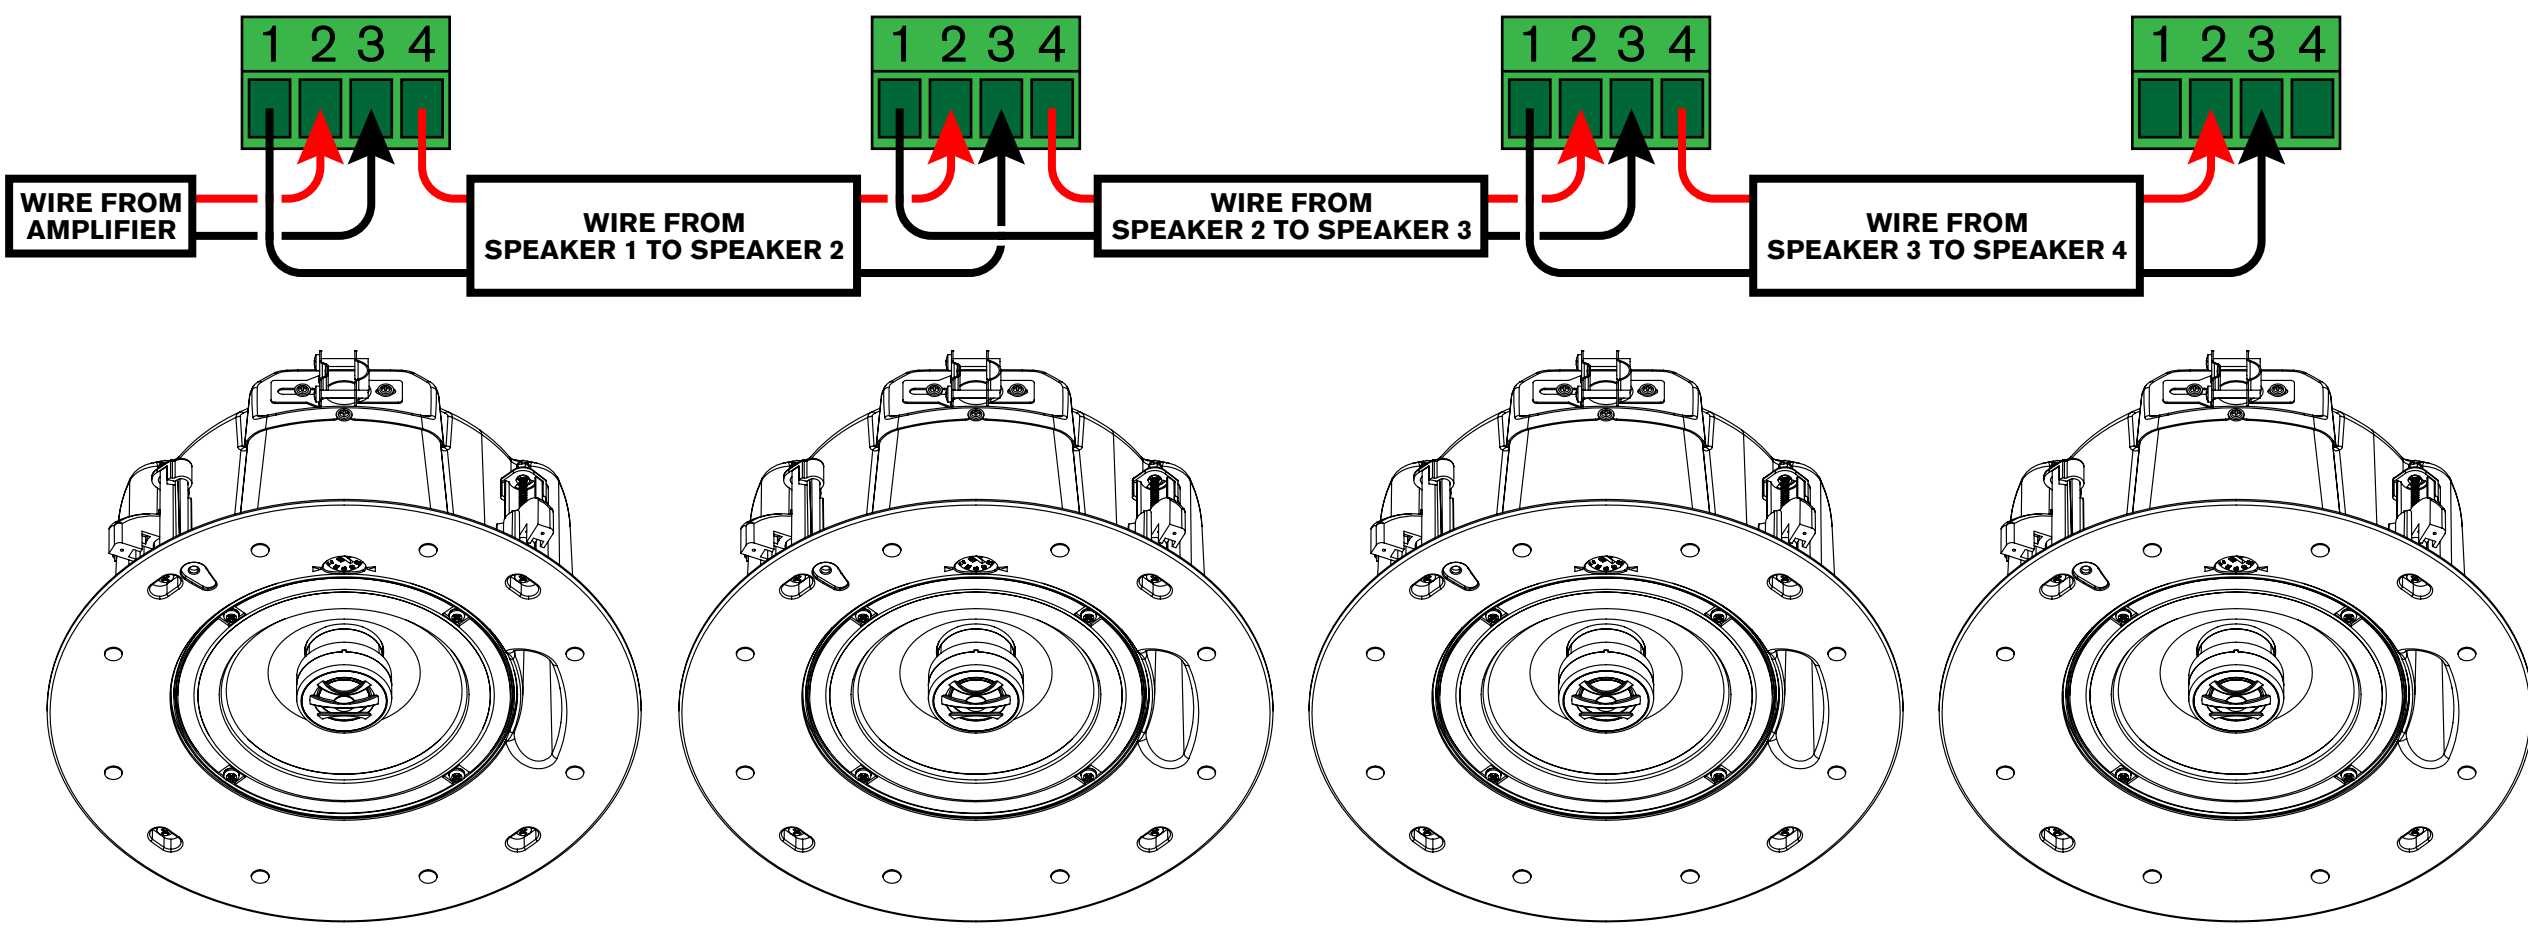

- 1) Install the four speakers in the ceiling (reference installation guide)
- 2) Remove Phoenix connector plate covers and feed wires through the port
- 3) Daisy chain the four speakers using the wire diagram above

STEP 3


Connect the daisy-chained speakers to the U Series amplifier

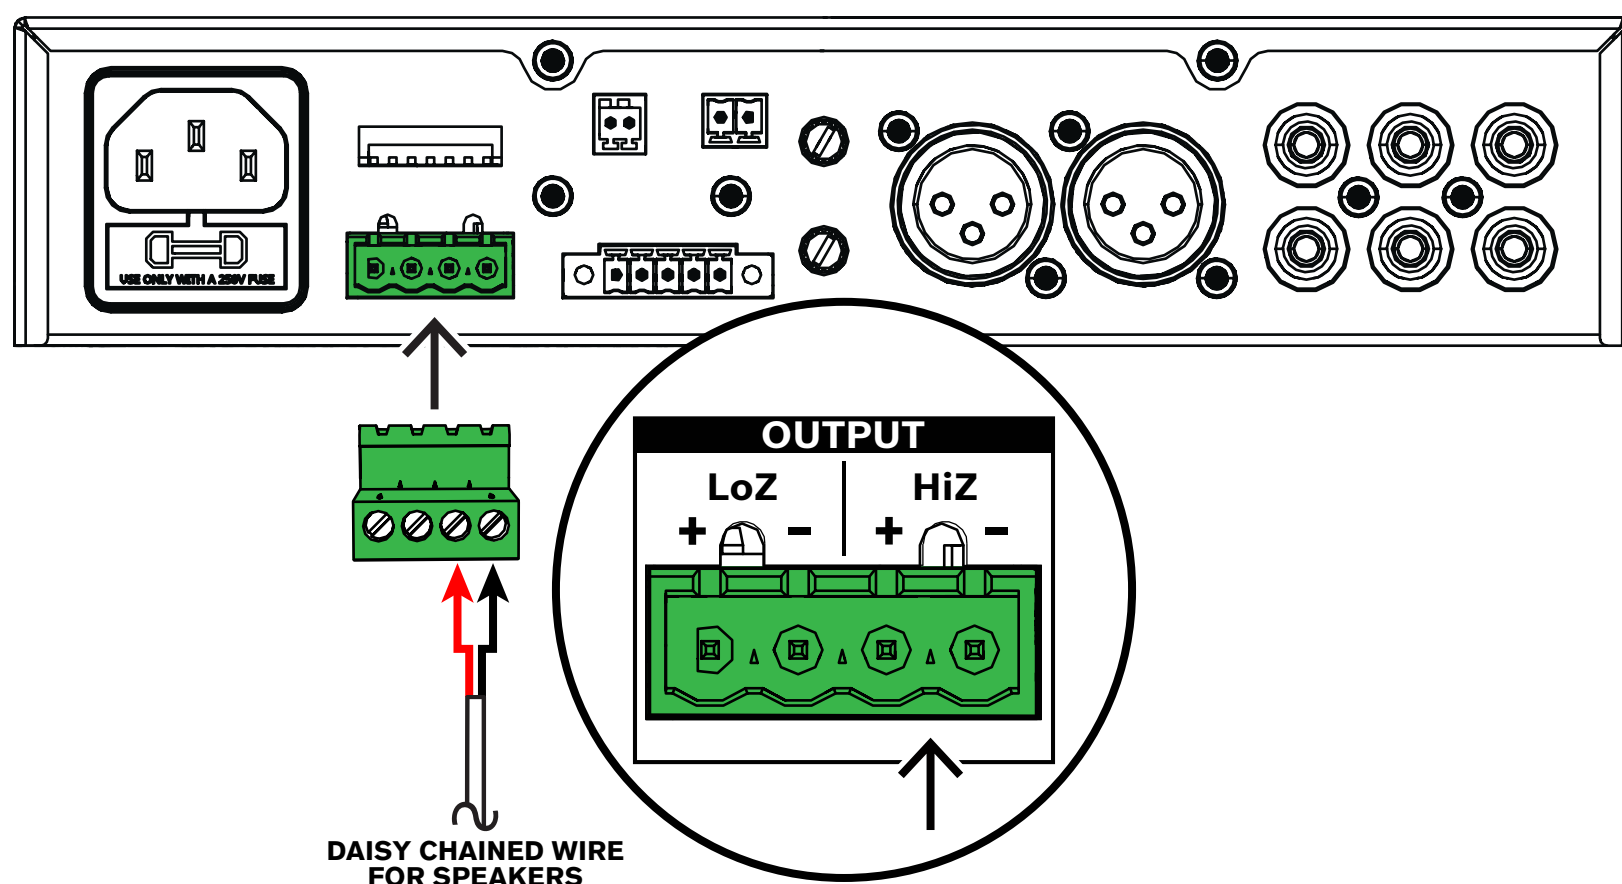

- 1) Make sure the wire leads are installed in the right two ports for "HiZ"
- 2) Plug the cable into the "OUTPUT" port

STEP 4


Set U Series amplifier DIP switches

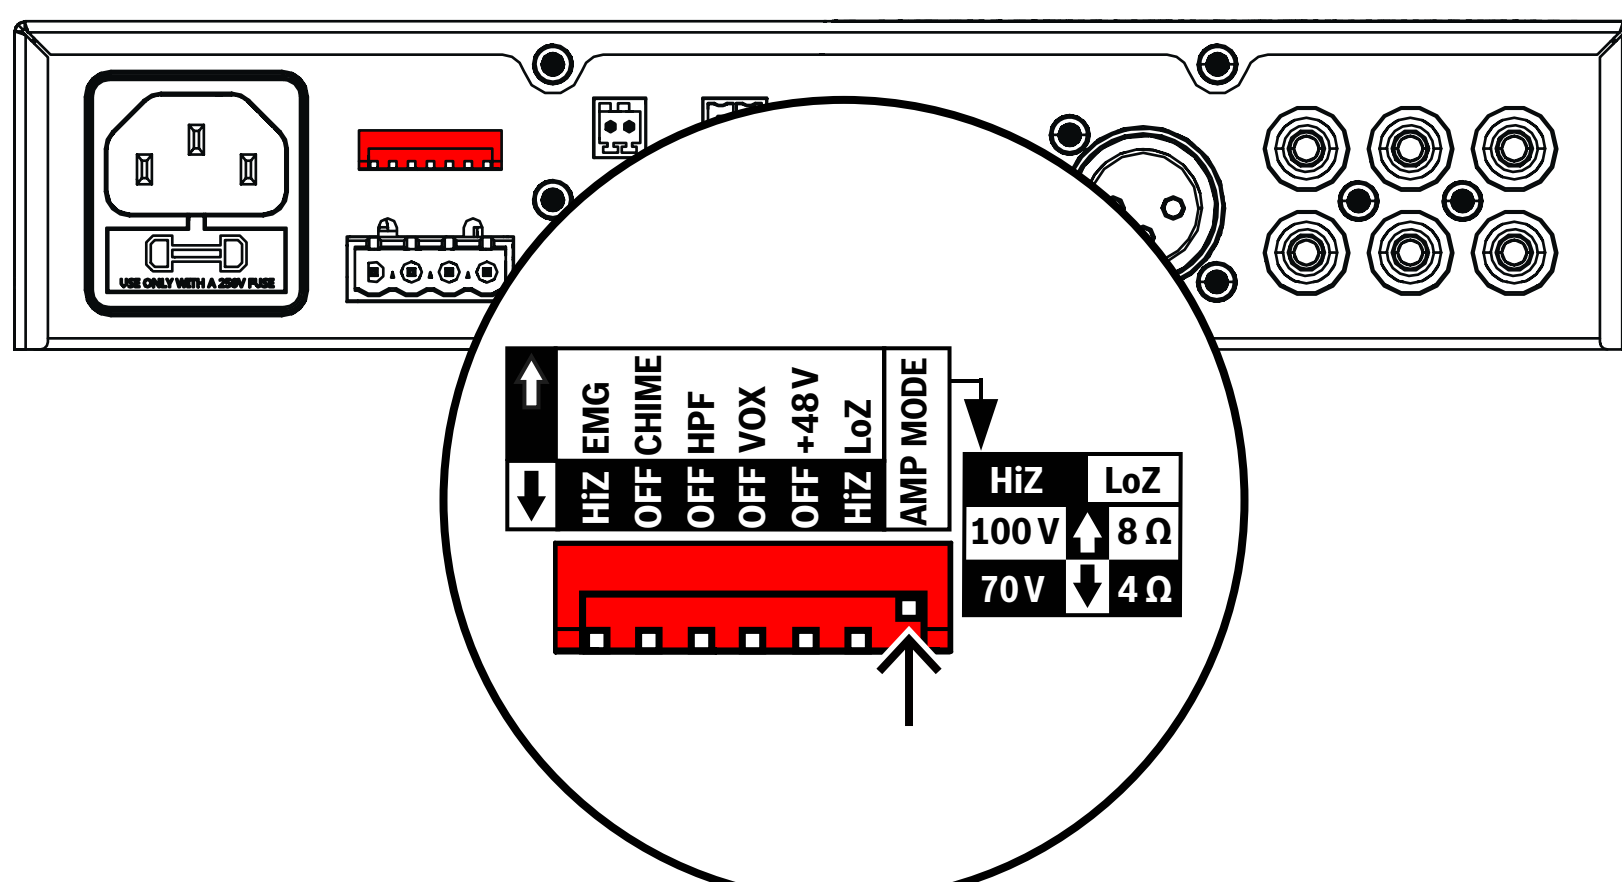

- 1) Using a small screwdriver, set the far right switch to the up position

STEP 5

Connect optional accessories to the U Series amplifier

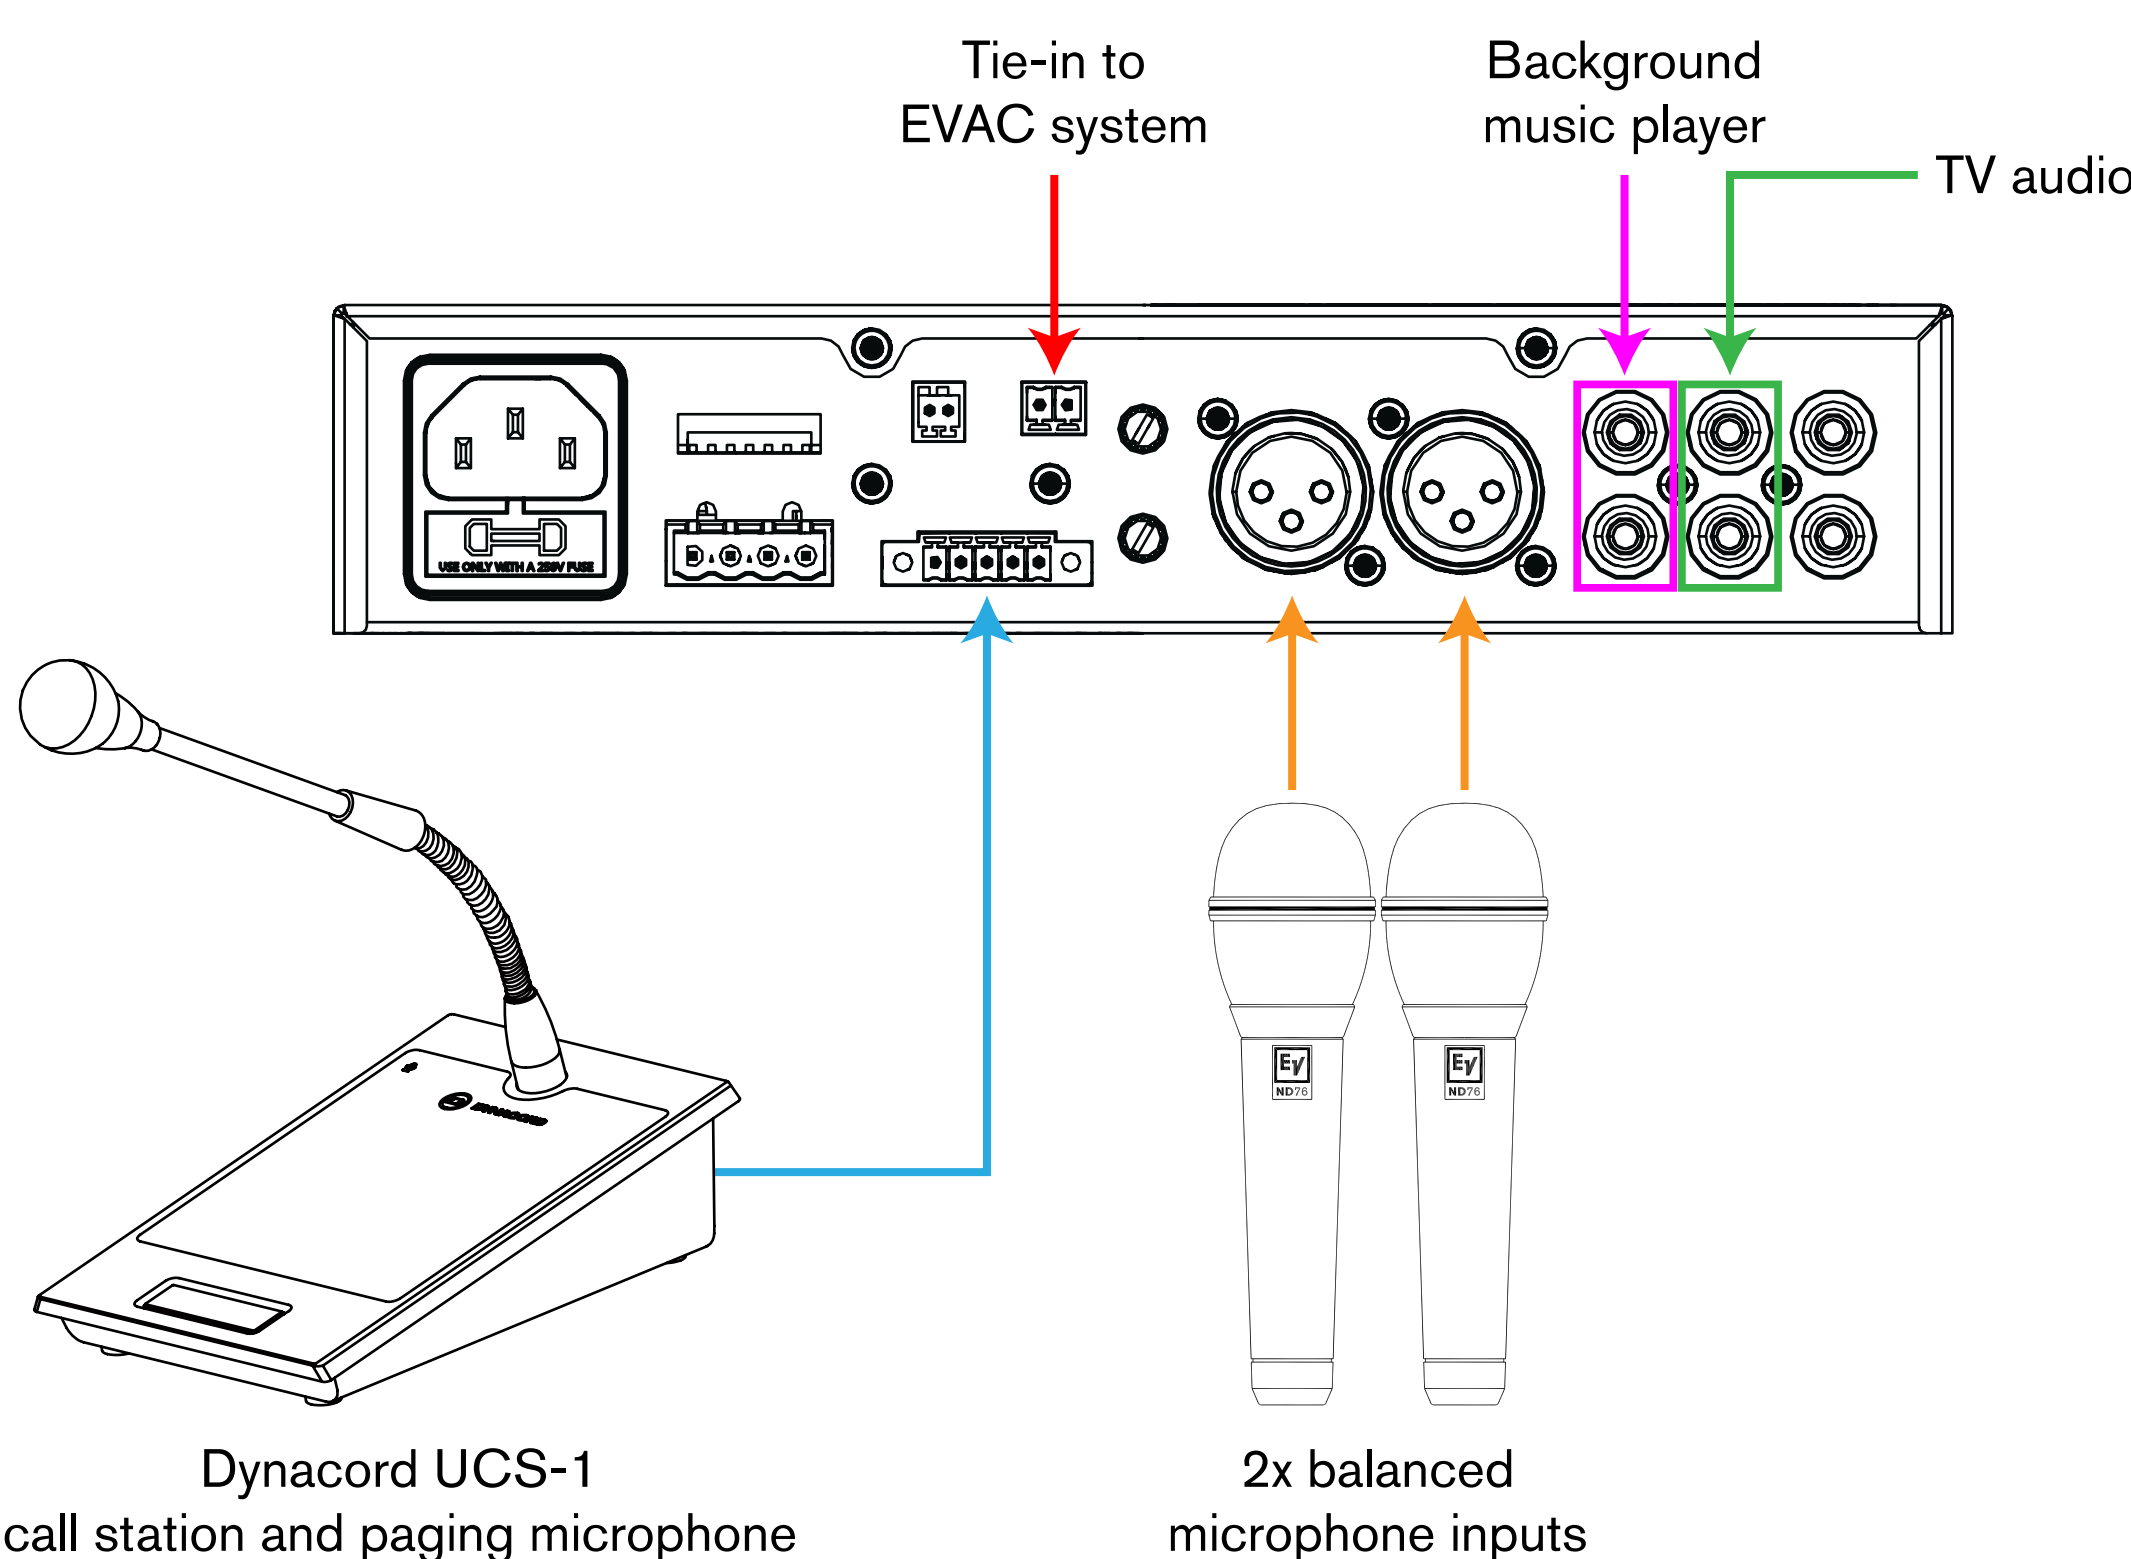

QUESTIONS?

Call our product & system troubleshooting line:

+49 (0) 9421 706 0

electro-voice.com dynacord.com