


Insulated Panels
Bulgaria

KS LH K-Roc[®] Wall Panel

Product Data Sheet

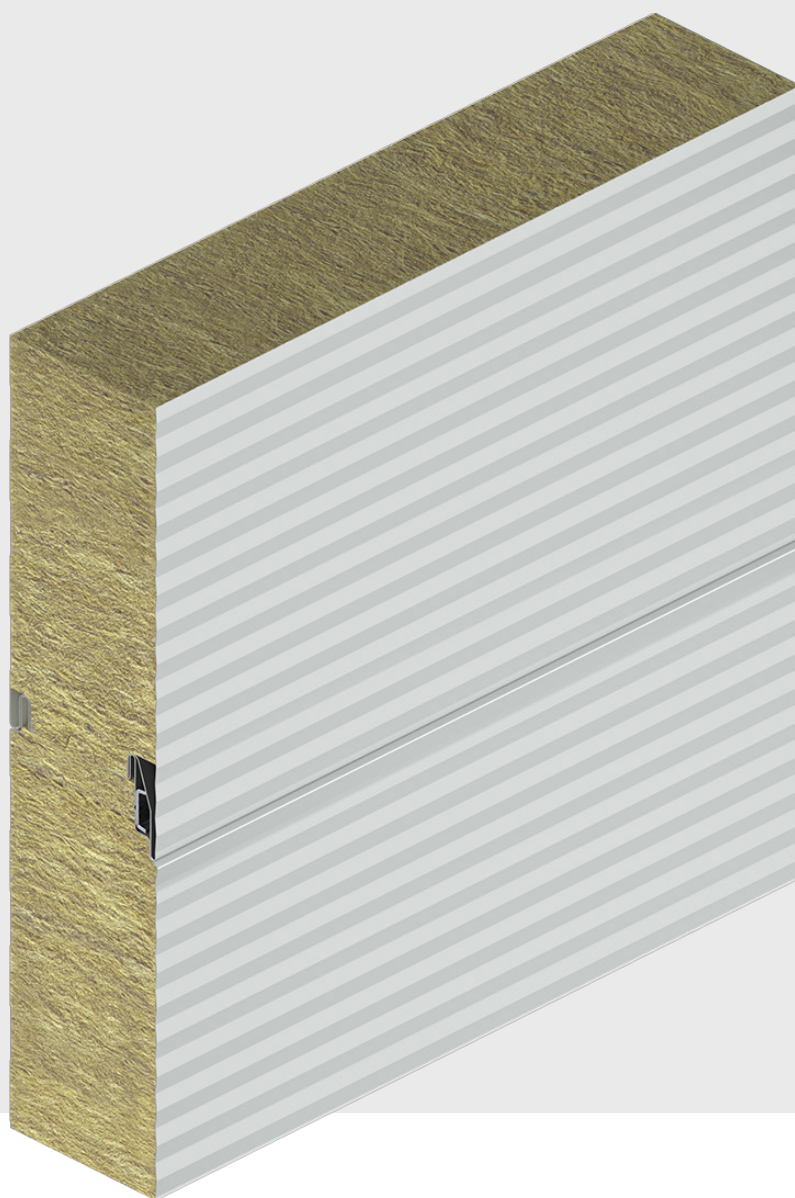

Application


KS LH K-Roc® wall panel is a sandwich panel with K-Roc® mineral wool insulation core, supplied from the production plant in Hradec Kralove, Kingspan Czech Republic.

The panel is suitable for cladding the external walls of all types of buildings with a design internal temperature higher than 5°C. For wall application, horizontal and vertical panel installation is possible.

The method of fixing to the structure: hidden anchoring elements, or, if necessary, admitted anchoring (screw with sealing washer). For hidden anchoring, the use of 2 screws with Ø 16 mm sealing washer and Z15b spreading washer is recommended. The use of a Kingspan system washer is required. Provided that it is statically satisfactory, one bolt with Ø 22 mm washer can be used without a spreader washer.

The suitability and feasibility of using a panel must be assessed individually with regard to the specific conditions of the project.

Panel Cross Section

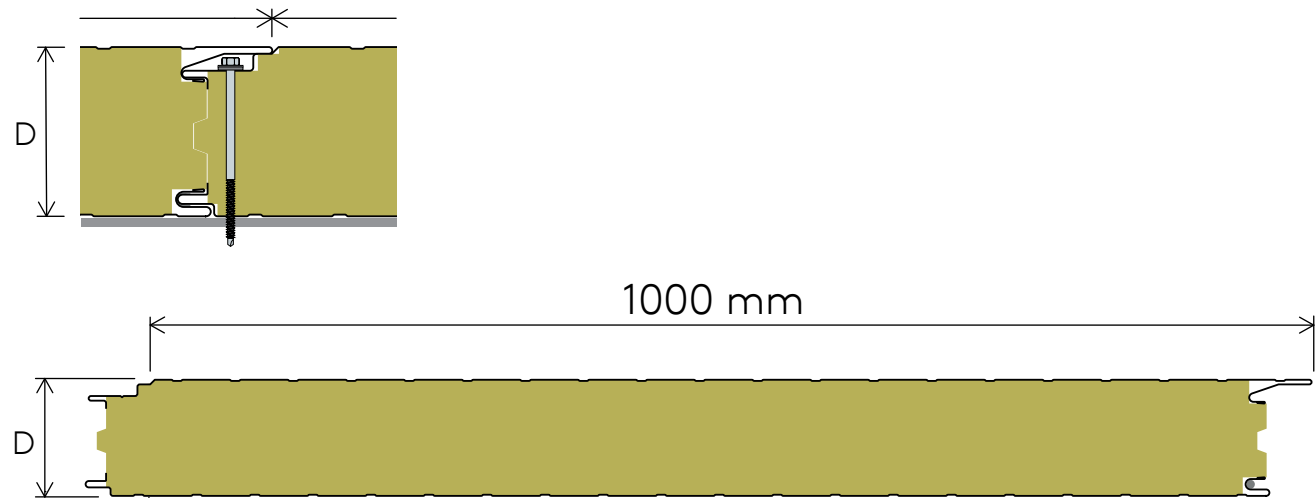

Technical Parameters

Kingspan insulated panels have been tested and approved to comply with EN 14509:2013.

Module width / Cover width [mm]	Core Thickness [mm]	Mass [kg/m ²]	Thermal Transmittance (U-value) acc. EN 14509:2013 [W/m ² ·K]	Airborne Sound Insulation R _w (C; C _{tr})	Weighted Sound Absorption Coefficient [α _w]
1,000 / 1,000	100	21.67	0.42	NPD	NPD
	120	24.07	0.35	NPD	NPD
	150	27.67	0.28	NPD	NPD

The technical data is valid for a face thickness of Ext / Int. 0.60 / 0.50 mm.
NPD - value has not been defined

Fire Performance

KS LH K-Roc® Wall Panel has been tested and approved to comply with EN 14509:2013.

Fire resistance classifications are given in accordance with EN 13501-2:2023. The table only shows the maximum fire resistance values according to EN 1364-1:2015 for external and internal walls and EN 1364-2:2018 for ceilings. Contact your Kingspan representative for results according to the extended application of fire tests for larger spans to EN 15254-5:2018 for exterior and interior walls and to EN

15254-7:2018 for ceilings.

Please note: the values given for fire resistance and other characteristics are subject to change over time.

Module width/Cover width [mm]	Core Thickness [mm]	Reaction to Fire	Fire Resistance - Ceiling	Fire Resistance - External Wall - Horizontal	Fire Resistance - External Wall - Vertical	Fire Resistance - Internal Wall - Horizontal	Fire Resistance - Internal Wall - Vertical
1,000/1,000	100	A2-s1, d0	NPD	• EI 120-ef (o→i) - 6m • EI 30 (i→o) / EW 30 (i→o) - 4m	• EI 30 (i→o) / EW 30 (i→o) - 7.5m • EI 90-ef (o→i) - 4m	NPD	NPD
	120	A2-s1, d0	NPD	• EI 120-ef (o→i) - 6m • EI 60 (i→o) / EW 60 (i→o) - 4m	• EI 60 (i→o) / EW 60 (i→o) - 4m • EI 90-ef (o→i) - 4m	NPD	NPD
	150	A2-s1, d0	NPD	• EI 120-ef (o→i) - 6m • EI 60 (i→o) / EW 60 (i→o) - 4m	• EI 60 (i→o) / EW 60 (i→o) - 4m • EI 90-ef (o→i) - 4m	NPD	NPD

¹ See details in the relevant certification report and/or in technical documentation available on request.

³ Class is not defined in standard EN 13501-2 for this application, but the product meets its criteria.

NPD - value has not been defined

Dimensions

Length

Shorter lengths (non-standard) [mm]	270-1849
Standard lengths [mm]	1850-10000
Longer lengths (non-standard) [mm]	10001-14200

Additional costs and transport restrictions may apply for non-standard lengths.

Width

The standard module width is 1,000 mm

Product Tolerances

Product tolerances are measured according to the standard EN 14509:2013, , Annex D.

Length tolerance	L≤3m, -	5 mm
Length tolerance	L≤3m, +	5 mm
Length tolerance	L>3m, -	10 mm
Length tolerance	L>3m, +	10 mm
Cover width tolerance	-	2 mm
Cover width tolerance	+	2 mm
Thickness tolerance	-	2 mm
Thickness tolerance	+	2 mm
Thickness tolerance	D>100mm, -	2 %
Thickness tolerance	D>100mm, +	2 %
Deviation from squareness		0.006 x w
Deviation from straightness (on length)		1mm/m, maximum 5 mm/m

Materials

Insulation Core

K-Roc® mineral wool insulation core with a Thermal Conductivity (λ) of 0.043 W/m·K according to EN 14509:2013, EN 13162:2012+A1:2015.

External facing

The standard thicknesses of the coil coated steel sheet are 0.6 mm.

On request also other steel sheet thicknesses are available.

Standard coating: Polyester SP25 (Kingspan PES 25).

Internal facing

The standard thicknesses of the coil coated steel sheet are 0.5 mm. On request also other steel sheet thicknesses are available.

Standard coating: Polyester SP25 (Kingspan PES 25).

Seals

KS LH K-Roc® Wall Panel is designed for direct installation. For normal use and installation, they are supplied from the factory in the final longitudinal joint design, without the need for the addition of seals and tapes on site. For non-standard applications or specific requirements, please contact Kingspan Support.

Profiles

The available profiles can be found in the corresponding profile table.

Colours

The available colours can be found in the "Colour shades and surface treatments" brochure.

Mechanical Resistance

Load capacity/span tables can be found in the booklet "Kingspan Technical Manual - Load span tables" or contact Kingspan Support.

Environmental Performance

Facilities located in Hradec Kralove generate renewable electrical energy onsite(PV) which contributes to that sites energy mix.

Kingspan Insulated Panels source steel with 13-23% recycled

content.

Kingspan Insulated Panels directly contribute to BREEAM® and LEED® credits.

Production Standard

Kingspan Insulated Panels apply to the European Standard EN 14509:2013 Self-supporting double skin metal faced insulating panels.

Quality

Kingspan Insulated Panels are manufactured from the highest quality materials using state of the art production equipment to rigorous quality control standards, complying with ISO 9001:2015 Quality management systems standards, ensuring long term reliability and durability.

The panels are also manufactured under Environmental management system certification EN ISO 14001:2015 and Occupational health and safety certification EN ISO 45001:2018.

KS LH K-Roc® Wall Panel is CE marked to EN 14509:2013.

Packing

Standard Packing - Road Transportation

Unless otherwise stated, all Kingspan insulation panels are supplied in packs, folded interior side down, the last three panels, top side up (not applicable to incomplete packs). The top and bottom walls of the packs are protected by polystyrene

or honeycomb board. The sides are then protected by polystyrene or honeycomb strips. The whole bales are covered on the underside with polystyrene blocks or a wooden pallet and wrapped in protective foil.

Core Thickness [mm]	100	120	150
Number of Panels	11/10	9	7

Delivery

All deliveries are by road transport to a project site unless otherwise indicated. Unloading is the responsibility of the customer.

Sea Freight

Full timber crate packs are available at extra cost for projects requiring sea freight delivery. Alternatively steel containers can be used. Special loading charges apply.

Site Storage & Installation

For site storage and installation instructions please refer to the respective brochure "Kingspan Technical Manual - Handling and Installation" or contact Kingspan.

Warranty

Kingspan warranties are assessed individually for each project, depending in particular on the aggressiveness of the environment and the type of surface treatment chosen.

Profiles

Profile	External	Internal
B - Box		
F - Flat		
M - Micro		
Q - Minibox		

Contact Details

Kingspan Insulated Panels
Manufacturing plant
Horka dűlő 1.
Újhartyán
2367
Tel: 36-30-455-4021
Email: info@kingspan.hu



Scan the QR code or [click here](#) for the latest version of the document.

The information provided in this datasheet is accurate as of its date of publication and represents our commitment to quality and transparency. However, Kingspan Insulated Panels reserve the right to modify product specifications without prior notice to reflect advancements or improvements.

For applications not explicitly covered within this datasheet, consultation with our Technical Advisory Service is strongly advised to ensure the product meets your specific requirements.

Users are responsible for verifying the product's suitability for their particular needs and for ensuring compliance with all applicable laws and regulations.

For the most up to date and comprehensive product details, always refer to the latest version of this datasheet by scanning the QR code above.

We reserve the right to update this datasheet, and any other informational materials, at our discretion and without notice.

For the latest information, please visit: <https://www.kingspan.com/bg/bg/>

