



ZXS Series

Stand-On ZTR MOWERS



ZXS SERIES

Stand-On ZTR

Designed with ergonomics and serviceability in mind, KIOTI ZXS Stand-on Mowers tackle your toughest turf with comfort and ease.

Ergonomic Controls

Spring Suspension Platform

Adjustable Dampers

48", 54" Cutting Widths

Large Fuel Capacity

Excellent Cut Quality



COMMERCIAL GRADE

ZXS48
ZXS54




Operator Controls

The ZXS stand-on controls include a key start, choke, throttle control, single pull deck lift, and adjustable dampers so landscapers can fine tune the controls to their desired feel and response. The front stationary bar is adjustable to reduce hand strain, or to make it easier for smaller hands to operate. Also, this adjustable bar can be easily setup to reduce speed for new users as well as increase speed for those who are more experienced.



Spring Suspension Operator Platform

Platform is suspended for comfort but can also be stowed away allowing the operator to walk-behind the mower for tight or confined areas.

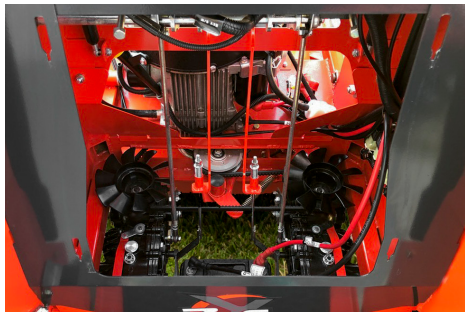

Spacious Center Tower

Center tower located behind plush operator pad is spacious to allow plenty of room for maintenance and service.



Large Fuel Tank

Large 7-gallon fuel tank allows for extended mowing, preventing downtime on the job due to refueling.



Kawasaki Engine

The KIOTI ZXS Series is equipped with a Kawasaki FT730V 2-Cylinder 90° V-twin internally vented carburetor engine delivering 24 HP.



Intuitive Deck Lift

Deck lift with locking pin height adjustment is also equipped with a single-pull handle to enable self-locking transport mode with push button release.



Heavy Gauge Fabricated Deck

10-gauge fabricated deck in 48" & 54" sizes with reinforced 7-gauge edge for long lasting durability.

SPECIFICATIONS

MODEL		ZXS48 / -EU	ZXS54 / -EU
ENGINE			
Maker		Kawasaki	
Model		FT730V	
Engine Gross	hp (KW)	24 (17.9)	
Displacement	cu. in. (cc)	44.3 (726)	
Rated Revolution	rpm	-	
Engine Idle Max.	rpm	3600	
Choke		Manual	
Fuel		Gasoline	
Engine Oil Capacity w/filter	ℓ	2	
Battery		12V 20Ah	
Type		Air-cooled, Vertical Shaft, OHV	
Number of cylinders		2(90° V-twin)	
Bore and Stroke		3.1 x 3.0 (78 x 76mm)	
Engine Starting		Electric Start	
Lubrication		Full Pressure Lubrication	
DRIVE SYSTEM			
Maker		Hydro-Gear	
Transmission, Transaxle		2*HST / ZT-3400	
Speeds	kph	16.8 5.6	
Steering		2-Hand levers	
Pump / Motor		12/16	
Parking Break		-	
PTO Type			
Clutch Type		Electric	
Battery (Minimum Recommended)		12 V 300 CCA/SP-35 or equivalent	
MOWER			
Mounting Method		Parrallel Linkage	
Adjustment of cutting height		Pin	
Deck Width	mm	1219.2	1371.6
Cutting Height	mm	38.1 - 114.3	
Discharge chute type		Side (Molded Rubber)	
Quantatity of blades		3	
Lift System		Manual	
CAPACITIES			
Fuel Tank	ℓ	26.5	
Engine oil	ℓ	1.8	
Transaxle oil (Transmission)	ℓ	5.3	
Engine coolant	ℓ	-	
TIRE SIZE			
ROPS (Foldable)		-	
Seat	Suspension	-	
	Seat Belt	Std.	
Headlight		-	
DIMENSIONS			
Overall length	mm	1650	
Overall width (discharge chute down)	mm	1540	1740
Overall height	mm	1200	
Wheel base	mm	1277.27	
Tread	Front	887	
	Rear	994.67	



KIOTI Europe B.V.

World Trade Centre Rotterdam, Beursplein 37,
3011 AA Rotterdam, The Netherlands

Tel +31 (0) 85 10 63 580

Web www.KIOTI.eu



Dealer Imprint Area