


Rugged 3U VPX SOSA Aligned Compute Intensive PIC with XMC for Crypto/Storage/Acceleration

Key Features

Magni is a rugged 3U VPX Plug In Card (PIC) based on the 16-core Intel® Core™ Ultra (Series 3) Processor for Crypto, Storage and Acceleration needs. It is designed in alignment with the SOSA® Technical Standard for compute intensive processor PICs.

- 16-core Intel® Core™ Ultra (Series 3) Processor
- Secure Enclave using security FPGA
- Intel® Iris Xe3 Graphics with Intel NPU for acceleration and AI Inferencing
- 64GBytes LPDDR5
- Data Plane: 100GBASE-KR4 Ethernet
- Control Plane: 2 x 10GBASE-KR Ethernet
- Expansion Plane: 1 Gen5 + 1 Gen4 x4 links PCI Express
- Up to 3.84TB storage with option for FIPS 140-3 compliant security
- XMC Site for crypto, storage or acceleration

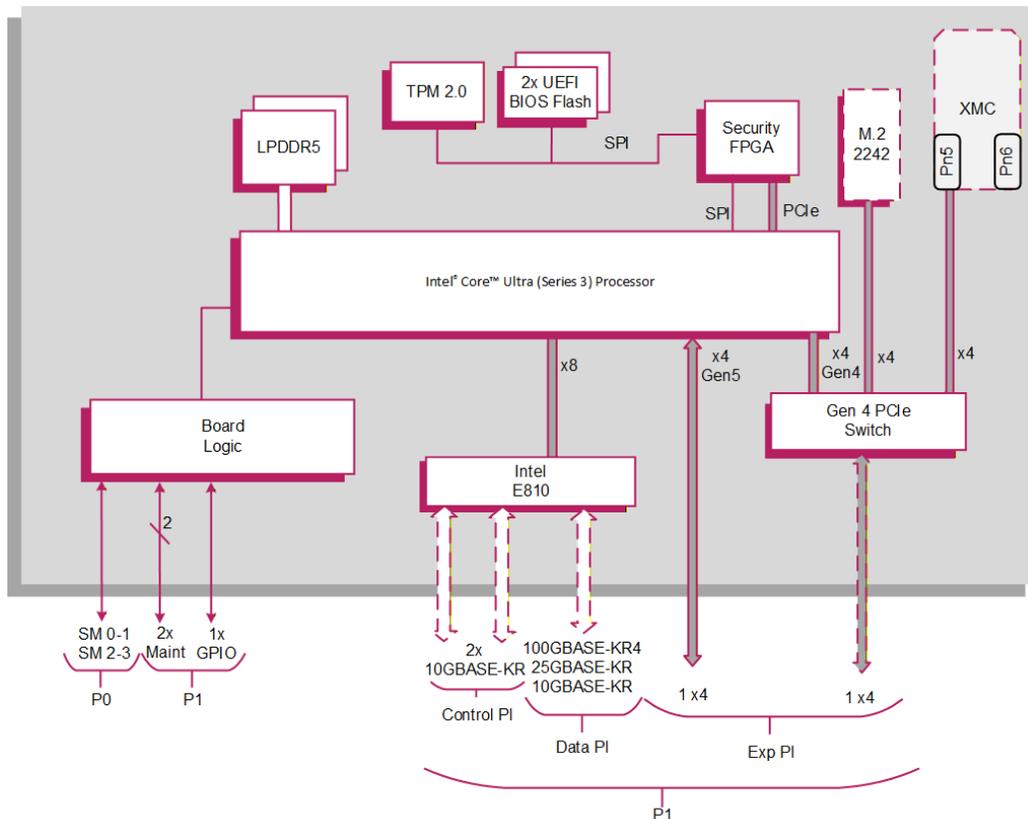

VPX Processor PIC

- Rugged conduction-cooled 3U VPX PIC based on 16-core Intel® Core™ Ultra (Series 3) Processor
- Compliant with one OpenVPX™ slot profile:
 - SLT3-PAY-1F1U1S1S1U1U2F1H-14-6.11-0

Central Processor

- 16-core Intel® Core™ Ultra (Series 3) Processor
- Intel® Iris Xe3 Graphics with Intel NPU for acceleration and AI Inferencing

DRAM

- 64 Gbytes soldered LPDDR5 IB ECC DRAM:
 - in-band ECC
 - single bit error correction

Optional XMC Site

- 1x XMC site, in a single VPX slot (VITA 42.0):
 - 1x4 PCI Express® (PCIe®)
 - PCIe® Gen 1, Gen 2, Gen 3 and Gen 4
- XMC connector type:
 - VITA 42 XMC (black colour)
- XMC VPWR +12 V

Serial Ports

- 2x maintenance ports accessed via P1
- Maintenance ports on P1 support LVCMOS levels
- 16550 compatible UARTs

Other Peripheral Interfaces

- PC RTC, watchdog timer
- 1x GPIO signal via P1
- USB-C on front for development purposes

Mass Storage Interfaces

- 1x M.2 SSD site supports:
 - 2242 format module
 - X4 PCIe® interface (M-key)
 - Opal 2.0 security encryption
 - Hardware Write Protect
 - NVMe Express® (NVMe®) logical device interface

VPX Control Plane, Ethernet

- Configurable Control Plane (VITA 46.6)
- 1x 10GBASE-KR Ethernet port via P1:
 - Supports up to 10GBASE-KR
 - Implemented by Intel® Ethernet Controller E810 via x8 PCIe®
 - Factory build option available to disable Control Plane
- Supports IEEE 1588 Precision Time Protocol

VPX Data Plane, 100 Gigabit Ethernet

- Configurable Ethernet VPX Data Plane fabric interface (VITA 46.7)
- 1x 100 Gigabit Ethernet port via P1 (VITA 46.7):
 - Supports 1x 100GBASE-KR4 or 1x 25GBASE-KR or 4x 10GBASE-KR
 - Additional 10GBASE-KR port supported in 4x 10GBASE-KR mode
 - Implemented by Intel® Ethernet Controller E810 via x8 PCIe®
 - Factory build option available to disable Data Plane
- Supports IEEE 1588 Precision Time Protocol

VPX Expansion Plane, PCI express®

- Configurable PCI Express® (PCIe®) VPX Expansion Plane fabric interface (VITA 46.4):
 - 1x4 (Gen 4) and 1 x4 (Gen 5)
 - Factory build option available to disable Expansion Plane

Optional Built-In Test (BIT) Support

- Power-on BIT, Initiated BIT, Continuous BIT

System Management

- IPMC on board controller:
 - SM0-1 and SM2-3
- VITA 46.11-2022 Tier 3 IPMC
- Option for VITA 46.11-2022 compatible Tier 1 Chassis Manager

Board Security

- Trusted Platform Module (TPM 2.0)
- Supports Total Memory Encryption, ROP Attack Prevention and Advanced Crypto-Key Protection
- Option for Sanitization Utility Software Package
- Option for proprietary board-level security features
- FPGA for Boot Security
 - FPGA adds an additional level of security in addition to the standard Boot Guard and Secure Boot

Software Support

- Supports Linux®

Firmware Support

- Dual 64 Mbyte BIOS Flash EPROMS
- UEFI boot firmware (BIOS):
 - UEFI 2.7 support
 - Implements Secure Boot
- Implements Intel® Boot Guard
- Optional Fast Boot solution using the Intel® Firmware Support Package (FSP)

- LAN boot firmware included

Support Safety

- PCB (PWB) manufactured with flammability rating of UL94V-0

Electrical Specification (Estimated)

- Typical current figure:
 - +12 V VS1 @ TBD
 - +3.3 V AUX @ TBD
- +12 V AUX and -12 V AUX routed to XMC site
- +5 V and +3.3 V are not connected

Environmental Specification

- Conduction-cooled (VITA 48.2)
- Operating temperature at card edge:
 - VITA 47 Class CC4, -40°C to +85°C
- Non-operating temperature at card edge:
 - VITA 47 Class CC4, -55°C to +105°C
- Operating altitude:
 - -1,500 to 60,000 feet (-460 to 18,300 meters)
- Rapid decompression:
 - From 8,000 to 60,000 feet (from 2440 to 18,300 meters)
- Relative humidity: 5% to 95%, non-condensing

Mechanical Specification

- 3U VPX form-factor (VITA 46.0, VITA 48.0)
- 3.9-inches x 6.3-inches (100 mm x 160 mm)
- Slot width (VITA 48.0):
 - 1.0-inch VPX-REDI Type 1, RCR-Series, Type 1 Extended Covers Two Level Maintenance (VITA 48.2)
 - 1.0-inch VPX-REDI Type 1, RCR-Series, Type 1 Standard Covers Two Level Maintenance (VITA 48.2)
- Connectors to VITA 46.0 for P0 and P1
- Operating mechanical:
 - Shock - VITA 47 Class OS2, 40 g
 - Random vibration - VITA 47 Class V3, 0.1 g²/Hz