



Operating instructions

Electrical Vacuum Generator ECBPMi

Note

The Operating instructions were originally written in German. Store in a safe place for future reference. Subject to technical changes without notice. No responsibility is taken for printing or other types of errors.

Published by

© J. Schmalz GmbH, 12/25

This document is protected by copyright. J. Schmalz GmbH retains the rights established thereby. Reproduction of the contents, in full or in part, is only permitted within the limits of the legal provisions of copyright law. Any modifications to or abridgments of the document are prohibited without explicit written agreement from J. Schmalz GmbH.

Contact

J. Schmalz GmbH
Johannes-Schmalz-Str. 1
72293 Glatten, Germany
T: +49 (0) 7443 2403-0
schmalz@schmalz.de
www.schmalz.com

Contact information for Schmalz companies and trade partners worldwide can be found at:
www.schmalz.com/salesnetwork

Contents

1	Important Information	5
1.1	Note on Using this Document	5
1.2	The technical documentation is part of the product	5
1.3	Type Plate	5
1.4	Symbols	6
2	Fundamental Safety Instructions	7
2.1	Intended Use	7
2.2	Non-Intended Use	7
2.3	Personnel Qualification	7
2.4	Warnings in This Document	8
2.5	Modifications to the Product	8
3	Product Description	9
3.1	Design of the ECBPMi	9
3.2	Display and Control Elements	10
4	Technical Data	13
4.1	Electrical Parameters	13
4.2	Mechanical Data	14
5	Description of Functions	16
5.1	Control Scheme	16
5.2	Depositing the Workpiece	16
5.3	Control Interfaces	16
5.3.3	ISDU Parameter Data	17
5.4	Lifting the Workpiece	18
5.5	Automatic Operation	18
5.6	Monitoring the System Vacuum and Displaying the Control Value	19
5.7	Setting the Vacuum Limit Value H2	19
5.8	Calibrating the vacuum sensor	20
5.9	Suction Functions	20
5.10	Drop-off Modes	22
5.11	Output and Input Signals	23
5.12	Activating a Freedrive Request	24
5.13	Switch-Off Delay	24
5.14	Device Functions	24
5.15	Resetting the Device to the Factory Settings	25
5.16	Counter(s)	26
5.17	Displaying Errors and Warnings	27
5.18	Energy and Process Control (EPC)	29
5.19	Production Setup Profiles	34
5.20	Device Data	34
5.21	User-Specific Localization	34
5.22	Robot-specific Device Data	35
5.23	Device Status	35

6	Checking the Delivery	36
7	Installation	37
7.1	Installation Instructions	37
7.2	Mechanical Attachment	37
7.3	Compatibility of the Schmalz Software for UR Robot Systems.....	39
7.4	Description of the Electrical Connection	39
7.5	Start of Operations	43
8	Operation	44
8.1	Hazard during Operation.....	44
8.2	Preparations	44
8.3	Operating Modes.....	44
9	Maintenance.....	46
9.1	Safety.....	46
9.2	Cleaning the Device.....	46
9.3	Cleaning the Sieve Insert.....	46
10	Warranty	48
11	Troubleshooting.....	49
12	Spare and Wearing Parts, Accessories	50
13	Disposing of the Device	51
14	Attachment.....	52
14.1	EC Declaration of Conformity.....	52
14.2	UKCA Conformity	53
14.3	ECBPMi Data Dictionary_21.10.01.00140_00.PDF	54

1 Important Information

1.1 Note on Using this Document

J. Schmalz GmbH is generally referred to as Schmalz in this document.

The document contains important notes and information about the different operating phases of the product:

- Transport, storage, start of operations and decommissioning
- Safe operation, required maintenance, rectification of any faults

The document describes the product at the time of delivery by Schmalz and is intended for:

- Installers who are trained in handling the product and can operate and install it
- Technically trained service personnel performing the maintenance work
- Technically trained persons who work on electrical equipment

The displayed figures are only examples. Depending on the particular design, they can differ from the product.

1.2 The technical documentation is part of the product

1. For problem-free and safe operation, follow the instructions in the documents.
2. Keep the technical documentation in close proximity to the product. The documentation must be accessible to personnel at all times.
3. Pass on the technical documentation to subsequent users.
 - ⇒ Failure to follow the instructions in these Operating instructions may result in injuries!
 - ⇒ Schmalz is not liable for damage or malfunctions that result from failure to heed these instructions.

If you still have questions after reading the technical documentation, contact Schmalz Service at:
www.schmalz.com/services

1.3 Type Plate

The type plate is permanently attached to the product and must always be clearly legible. It contains product identification data and important technical information.

The QR code enables access to the digital technical documentation for the product.

- ▶ For spare parts orders, warranty claims or other inquiries, have the information on the type plate on hand.

1.4 Symbols



This symbol indicates useful and important information.

- ✓ This symbol represents a prerequisite that must be met before an action is performed.
- ▶ This symbol represents an action to be performed.
- ⇒ This symbol represents the result of an action.

Actions that consist of more than one step are numbered:

1. First action to be performed.
2. Second action to be performed.

2 Fundamental Safety Instructions

2.1 Intended Use

The ECBPMi is designed to generate a vacuum for gripping and transporting objects when used in conjunction with suction cups. The pump is designed to be connected to a PLC or a robot control unit.

It has been specially developed for use in collaborative robot systems.

Non-aggressive and flammable gases and dry and oil-free air (no graphite) are permitted as the media to be evacuated.

To safely operate the ECBPMi Plus version, you require the latest version (V4.3.6) of the relevant Schmalz URCap software. Schmalz URCap is not downward compatible. Validity of Schmalz URCap:

- Schmalz URCap (V4.3.6) valid for ECBPMi and ECBPMi PLUS on robot systems from UR with the control software Polyscope 5.8 or higher (used in UR e series).
- Schmalz URCap (V4.3.6) valid for ECBPMi on robot systems from UR with the control software Polyscope 3.12 or higher (used in UR CB series).

The product is built in accordance with the latest standards of technology and is delivered in a safe operating condition; however, hazards may arise during use.

The product is intended for industrial and commercial applications.

Intended use includes observing the technical data and the installation and operating instructions in this manual.

2.2 Non-Intended Use

Schmalz accepts no liability for damages caused by the use of the product for purposes other than those described under "Intended Use." The use of the product for loads that are not specified in the order confirmation or have different physical properties than those specified in the order confirmation shall be considered non-intended use.

2.3 Personnel Qualification

Unqualified personnel cannot recognize dangers and are therefore exposed to higher risks!

The operating company must ensure the following points:

- The personnel must be commissioned for the activities described in these operating instructions.
- The staff must be at least 18 years of age and physically and mentally capable.
- The operating staff have been instructed in the operation of the product and have read and understood the operating instructions.
- Work on electrical equipment must be carried out only by qualified electrical specialists.
- Installation, maintenance, and repairs must be carried out only by specialists or by persons who can prove that they have undergone appropriate training.

Applicable for Germany:

A qualified employee is defined as an employee who has received technical training and has the knowledge and experience – including knowledge of applicable regulations – necessary to enable him or her to recognize possible dangers and implement the appropriate safety measures while performing tasks. Qualified employees must observe the relevant industry-specific rules and regulations.

2.4 Warnings in This Document

Warnings warn against hazards that may occur when handling the product. The signal word indicates the level of danger.

Signal word	Meaning
 WARNING	Indicates a medium-risk hazard that could result in death or serious injury if not avoided.
 CAUTION	Indicates a low-risk hazard that could result in minor or moderate injury if not avoided.
NOTE	Indicates a danger that leads to property damage.


2.5 Modifications to the Product

Schmalz assumes no liability for consequences of modifications over which it has no control:

1. The product must be operated only in its original condition as delivered.
2. Use only original spare parts from Schmalz.
3. The product must be operated only in perfect condition.

3 Product Description

3.1 Design of the ECBPMi

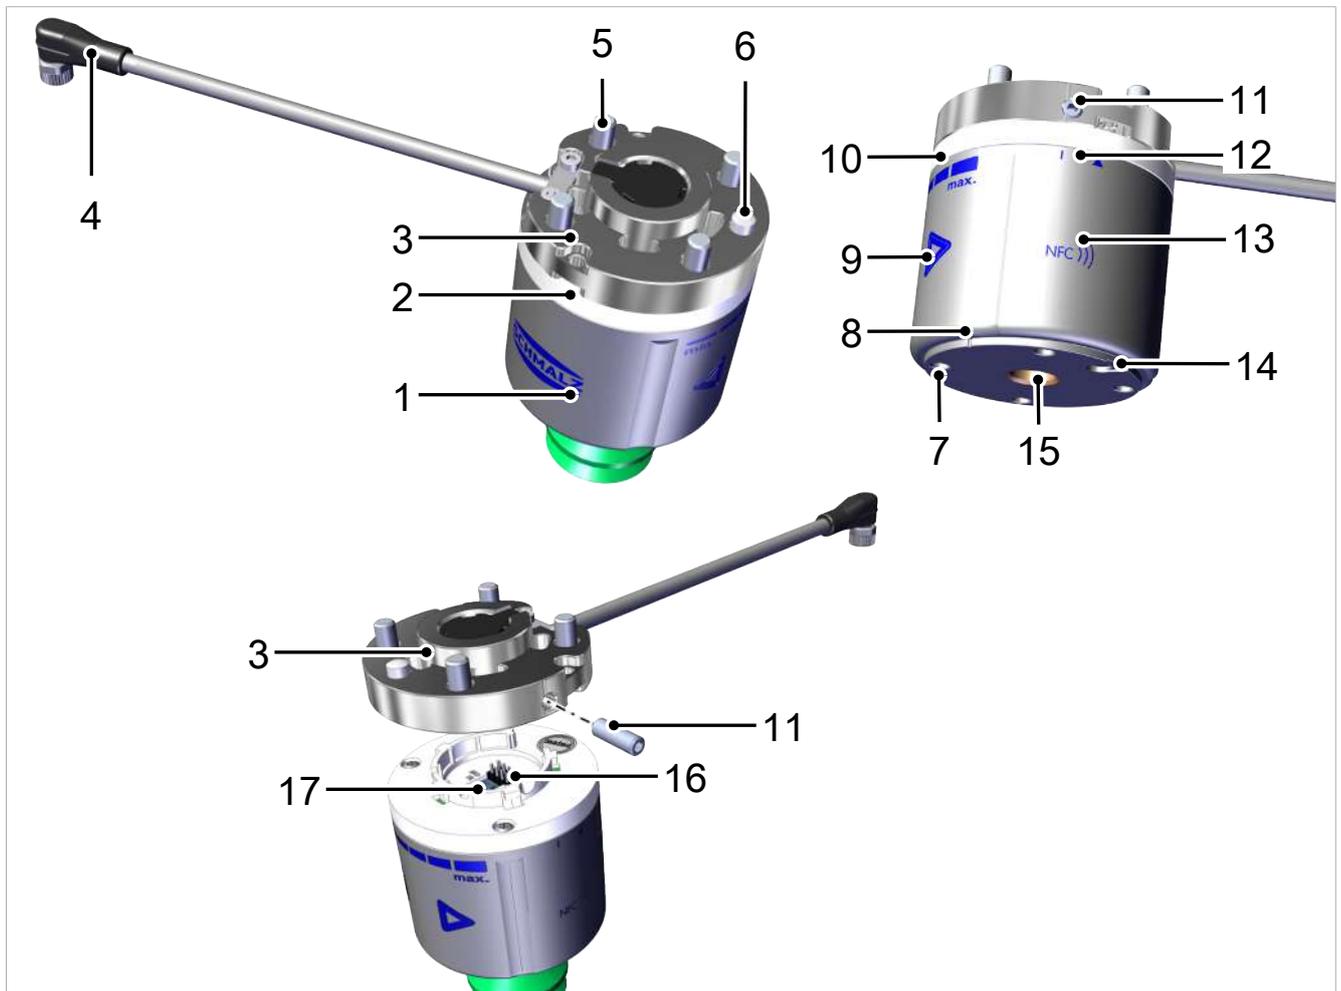


1	Housing of ECBPMi	10	Vacuum display field, segmented LED display in the front section
2	LED status indicator, 360° RGB circumferential light	11	Set screw for securing the customer-specific robot connection flange
3	Customer-specific robot connection flange	12	Bayonet fastener position indicator
4	Electrical connection, connection cable with robot-specific length and connection plug	13	NFC symbol
5	Fastening screw for the robot, 4x M6x10	14	Ventilation opening
6	Positioning pin	15	Vacuum connection with G1/4" female thread
7	Thread insert, 4x M4 female thread	16	Pin spring contact for the flange
8	Marking for the alignment of the optional VEE flange ¹⁾	17	ECBPMi PNP/NPN setting for the inputs and the output OUT2
9	Touch capacitive button, 2x		

1) When mounting the VEE flange, the side marking on the ECBPMi (8) must align with the marking on the flange.

3.2 Display and Control Elements

3.2.1 Description of the Display and Control Elements

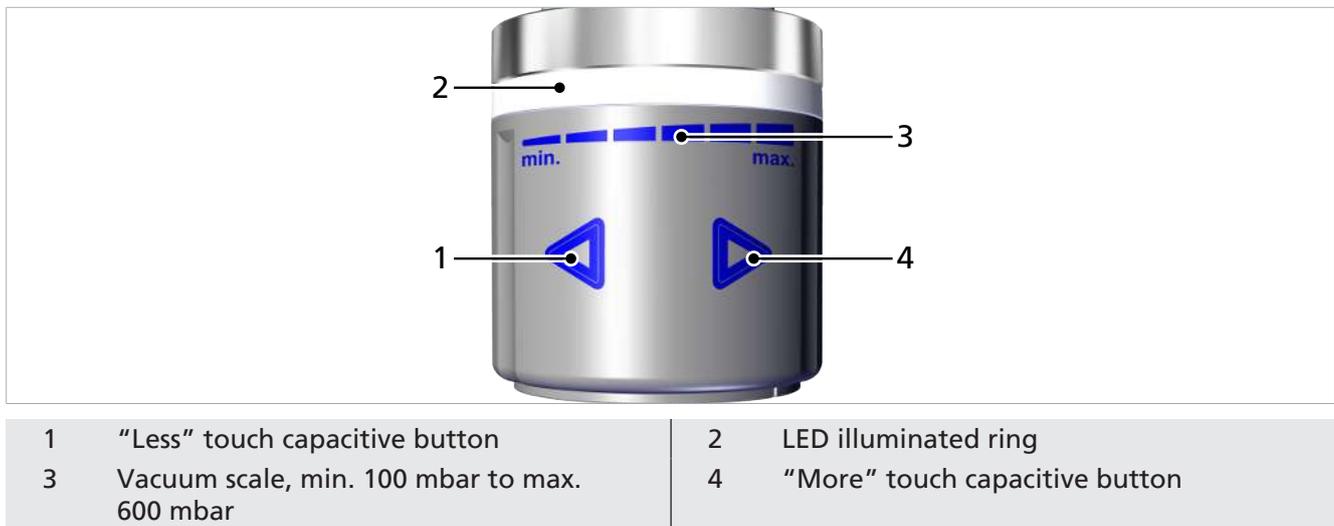

The ECBPMi is operated using two touch capacitive buttons.

The buttons are used to set the limit value H2 ("Part Present"). When this limit value is exceeded, the digital output OUT2 is activated.

The LED illuminated ring conveys various status information and the vacuum level is shown in the front section when adjusting the limit value.

When the power supply is switched on, the touch capacitive buttons self-calibrate. The buttons should not be touched at this time.

3.2.2 Operation with Gloves

The sensitivity of the touch capacitive buttons is designed in such a way that the relevant button is activated only if the housing is touched during operation with the finger or hand. However, it can also be operated with a variety of thin or special gloves.

Wear gloves made from cotton or gloves with touch-sensitive surfaces with the capacitive touch feature.

Do not use thick gloves to operate the touch-sensitive buttons.




If the buttons do not respond while you are wearing gloves, please remove the gloves and try again without them.

3.2.3 LED State Indicators

The integrated LED status indicators show the current process statuses.

The ECBPMi has two LED areas for displaying the status.

The table below explains the meaning of the LEDs:

360° status indicator LEDs		ECBPMi status
	All lights are off.	No power supply The device is inactive
	Blue light remains illuminated	Default status: "Part Present" status: Ready, vacuum < H2 (vacuum has fallen below "Part Present" limit value), OUT2 is deac- tivated
	Blue light, circulating	Freedrive: The robot arm is free to move to a new position, output OUT3 is activated.
	Blue light, flashing	The set value has been saved.
	Green light remains illuminated	Vacuum limit value H2 is reached, vacuum > H2, output OUT2 is activated
	Yellow light, which illuminates sec- tion by section	Initiating "Reset to factory settings" via manual operation Performing "Reset to factory settings"
	Orange light remains illuminated	Warnings have been issued
	Orange light, flashing	The set value was not saved.
	Red light pulsing	1x supply voltage error 2x temperature error 3x pump error For more information, see (> See ch. 5.17.1 Displaying Errors, p. 27)

Adjusting the color and brightness of the “Part Present” LED status display

The blue, continuously illuminated light to indicate “Part Present” status is selected in the default settings.

“Part Present” status can be adjusted in IO-Link mode in terms of color and brightness. Individual settings can be configured for “Ready” status, “Vacuum < H2” as well as the status “Vacuum limit value H2” reached, “Vacuum > H2.”


The “Color-Profile” parameter [0x0052] can then be used to define color tone (RGB) and brightness for the above-mentioned statuses using four bytes each.

The brightness setting has no influence on the color tone. I.e. when the brightness changes, the perceived brightness is changed — not the color, the color tone remains the same.

The “System Command” parameter [0x0002] can be used to reset the LED settings to the factory settings (default values) using the 0xAC command.

3.2.4 Vacuum Level Indicator

Above the printed scale on the front, six LEDs indicate the vacuum level of the vacuum limit value H2 for the “Part Present” check, in a range of 100 to 600 mbar.

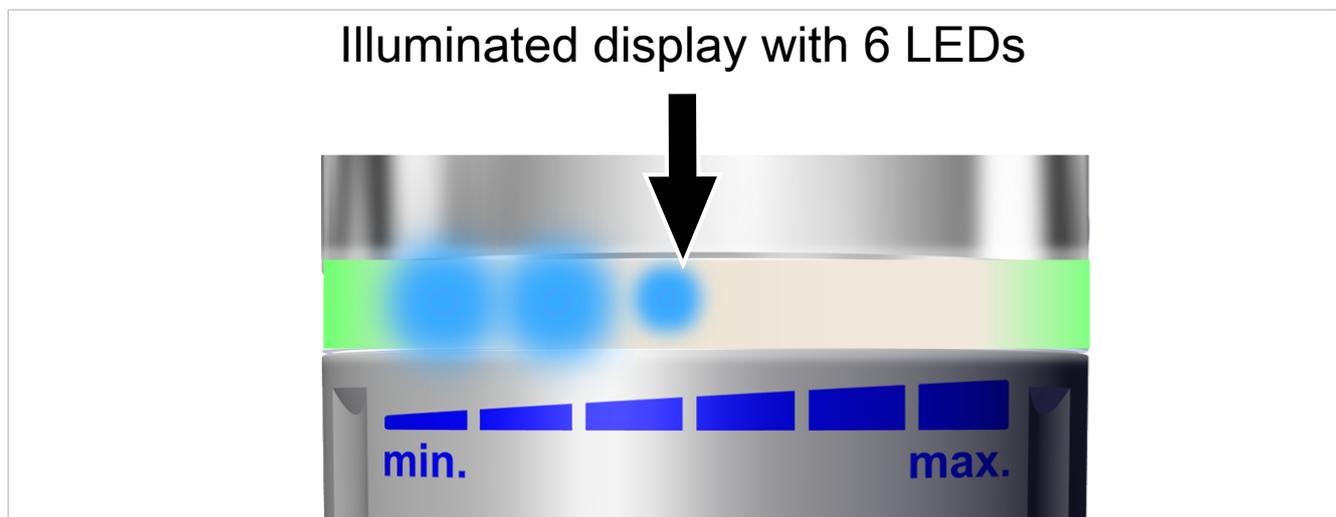

The indicator for the vacuum level that is currently set is activated using one of the buttons.

The vacuum limit value can be increased or lowered either by tapping or holding down the two touch capacitive buttons.

The scale shows a range of 100 (min.) to 600 mbar (max.) (100 mbar per LED). It can be adjusted in 10 mbar increments.

The example above shows a vacuum level of 240 mbar:

- The first two LEDs light up with 100% brightness
- The third LED lights up with 40% brightness

You can save a new setting for vacuum limit value H2 by pressing both buttons for more than one second. A blue flashing light indicates that the setting was saved successfully.

If the set value is not compatible with the set profile because the H1 value is exceeded, this is also indicated by an orange flashing light.

If the buttons are not pressed for more than five seconds, the display is deactivated and the current set value is not saved. This is also indicated by the LED ring flashing orange.

4 Technical Data

4.1 Electrical Parameters

Parameter	Symbol	Limit values			Unit	Comment
		min.	typ.	max.		
Supply voltage	U_S	19.2	24	26.4	V _{DC}	PELV ¹⁾
Rated current from U_S	I_S	—	130	180	mA	$U_S = 24.0$ V
Voltage of signal output OUT2 (PNP)	U_{OH}	$U_S - 2$	—	U_S	V _{DC}	$I_{OH} < 140$ mA
Voltage of signal output OUT2 (NPN)	U_{OL}	0	—	2	V _{DC}	$I_{OL} < 140$ mA
Voltage of signal output OUT3 (PNP)	U_{OH}	$U_S - 1$	—	U_S	V _{DC}	$I_{OH} < 5$ mA
Current of signal output OUT2 (PNP)	I_{OH}	—	—	140	mA	Short-circuit-proof ²⁾
Current of signal output OUT2 (NPN)	I_{OL}	—	—	-140	mA	Short-circuit-proof ²⁾
Current of signal output OUT3 (only PNP)	I_{OH}	—	—	5	mA	Not protected against short circuits
Voltage of signal input IN1 / IN2 (PNP)	U_{IH}	15	—	U_A	V _{DC}	—
Voltage of signal input IN1 / IN2 (NPN)	U_{IL}	0	—	9	V _{DC}	—
Current of signal input IN1 / IN2 (PNP)	I_{IH}	—	5	—	mA	—
Current of signal input IN1 / IN2 (NPN)	I_{IL}	—	-5	—	mA	—
Reaction time of signal inputs	t_i	—	3	—	ms	—
Reaction time of signal output	t_o	—	2	3	ms	—

1) The power supply must correspond to the regulations in accordance with EN60204 (protected extra-low voltage). The signal inputs and signal outputs are all protected against reverse polarity.

2) The signal output OUT2 is protected against short circuits. However, it is not protected against overloading. Constant load currents of > 0.14 A can lead to impermissible heating and subsequent functional failure.

4.2 Mechanical Data

4.2.1 General Parameters

Parameter	Symbol	Limit values		Comment
		min.	max.	
Temperatures of working medium and environment	T_{amb}	0° C	40° C	—
Storage temperature	T_{sto}	-10° C	60° C	—
Humidity	H_{rel}	10% r.h.	90 % r.h.	Free from condensation
Degree of protection with flange	—	IP40		—
Service life	—	6,000 h	—	At an ambient temperature of 25 °C
Permitted operating medium	—	Non-aggressive and flammable gases; dry, oil-free air (no graphite)		


4.2.2 Mechanical Performance Data

Max. vacuum	Suction rate	Sound level	Weight	Load limit Horizontal installation ¹	Load limit Vertical installation ² (l = 100 mm)
600 mbar	0 to 1.6 l/min	57 dBA	230 g	Max. 30 N	Max. 10 N


Note on the specifications for the ECBPMi load limits

These figures apply for static loads. The maximum load limits given here apply to the ECBPMi only. For use in connection with an HRC-capable robot, observe the maximum weight limits determined by the manufacturer of the robot.


¹ horizontal installation

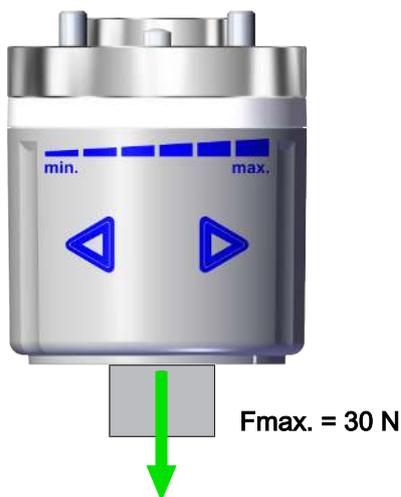

² vertical installation

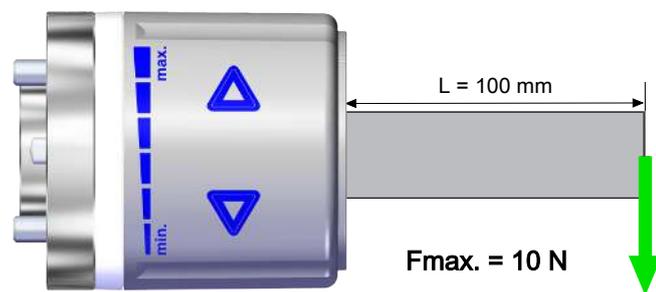

4.2.3 Dimensions

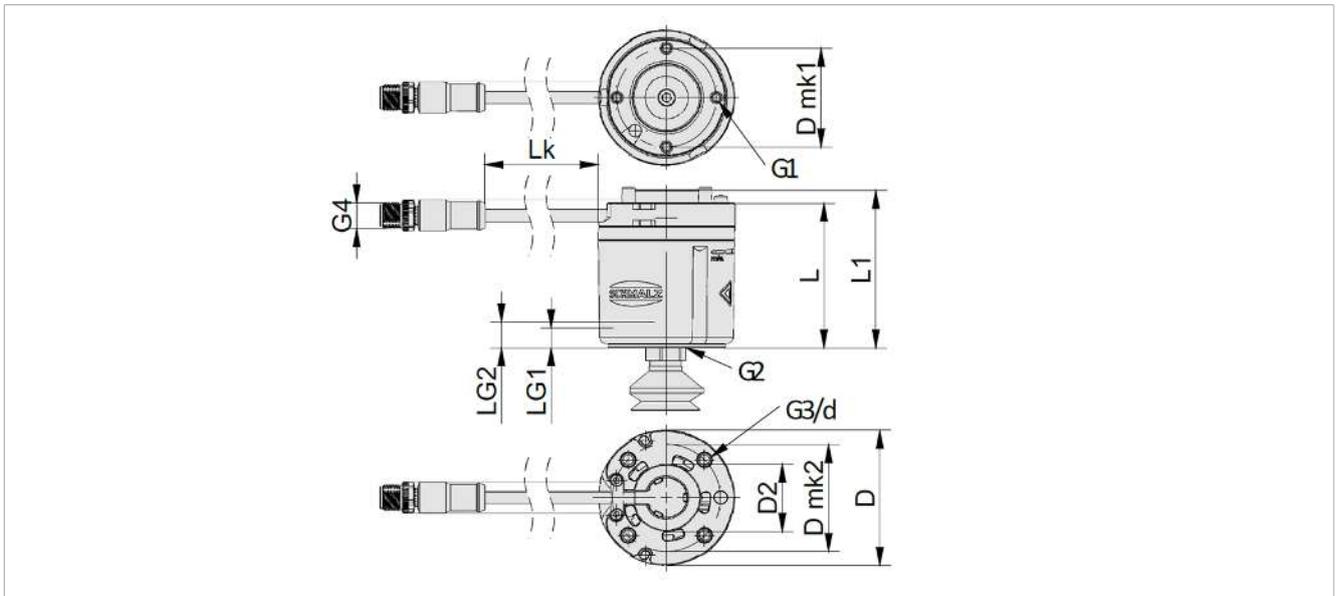

The dimensions of the individual ECBPMi products and additional technical data can be found at: www.schmalz.com

Other robot sets (robot flange and connection cable) available upon request.

4.2.4 Maximum Torque

Connector	Max. torque
G1 thread (4x injection bushing)	1.3 Nm
G2 thread (vacuum connection)	2.0 Nm
Attachment (1x set screw 4027 M5x16)	0.2 Nm

4.2.5 Factory Settings

Parameter	Value of the factory setting
Vacuum limit value H1	600 mbar
Reset point h1	580 mbar (H1 - 20 mbar)
Vacuum limit value H2	480 mbar
Reset point h2	460 mbar (H2 - h2)
Signal type for inputs and OUT2	PNP
Signal type for OUT3	PNP

5 Description of Functions

5.1 Control Scheme

The controls of the device are defined in such a way that, if both inputs are activated at the same time, blowoff has priority over suction.

5.2 Depositing the Workpiece

The “blowoff” valve is controlled directly via the “blowoff” signal input IN2 in SIO mode. In IO-Link mode, the device changes to “Blowoff” mode via the “Drop-off” output process data bit.

In “Blowoff” operating mode, the vacuum circuit of the ECBPMi is vented to the outer atmosphere while the signal is issued. This ensures that the vacuum drops immediately and the workpiece is deposited quickly ([> See ch. 5.10 Drop-off Modes, p. 22](#)).

In IO-Link mode, the set input process data bit “Signal H3 (part detached)” provides information about:

- Whether, after reaching the limit value H2 (vacuum > H2), the vacuum has dropped again during suction (vacuum < H2)
- Whether a picked-up part has been deposited.

The ventilation opening on the underside must not be covered. Otherwise, error-free blowoff will not be possible.

5.3 Control Interfaces

5.3.1 Basic Principles of IO-Link Communication

The component is operated via IO-Link to enable intelligent communication with a controller.

IO-Link is a communication system for connecting intelligent sensors and actuators to an automation system and is described in the standard IEC 61131-9. The standard contains both the electrical connection data as well as a digital communication protocol via which sensors and actuators exchange data with the automation system.

An IO-Link system consists of an IO-Link master and one or more IO-Link enabled sensors or actuators. The IO-Link master provides the interface to the higher level controller (PLC) and controls the communication with the connected IO-Link devices. An IO-Link master can have one or more IO-Link ports, however only one IO-Link device can be connected to each port.

IO-Link devices have parameters that can be read or written via the IO-Link protocol. Parameters can therefore be changed by the higher-level controller during operation. Since the sensor and actuator parameters are device-specific, parameter information is available for each device in the form of an IODD (IO Device Description).

5.3.2 Process Data

The cyclical process data is used to control the product and receive current information reported from the component. There is a difference between the input data (Process Data In) and the output data (Process Data Out) for control:

The input data Process Data In is used to report the following information cyclically:

- Limit values H1 and H2
- The status of H3
- The product device status in the form of a status traffic light
- EPC data
- Feedback about the executed Autoset function
- Freedrive request and approval
- Feedback about the operating mode

The output data Process Data Out is used to control the product cyclically:

- EPC Select is used to define which data is sent.
- The product is controlled using the suction and blowoff commands.
- The desired operating mode is specified via control mode (continuous suction or control)
- Condition monitoring parameters can be determined automatically with CM Autoset
- Activation of predetermined parameter profiles (production profiles)
- Specification of limit value H1 in control mode
- Specification of pump capacity in continuous suction mode
- Specification of limit value H2
- Can be set to Freedrive, Warning or Error states by the robot

The exact meaning of the data and functions is described in more detail in the “Description of Functions” chapter. A detailed description of the process data can be found in the data dictionary.

The corresponding device description file (IODD) is available for integration into a higher-level control unit.

5.3.3 ISDU Parameter Data

The acyclical communication channel can be used to retrieve what are known as ISDU (Index Service Data Unit) parameters, which contain further information on the system status.

The ISDU channel can also be used to read or overwrite all the settings, e.g. the limit values, additional leakage, etc. Further information on the identity of the product, such as the part number and serial number, can be retrieved using the IO-Link. The product also provides space for saving user-specific information here, such as the installation and storage location.

The exact meaning of the data and functions is described in more detail in the “Description of Functions” chapter.

You can find a detailed diagram of the process data in the data dictionary and IODD.

In order for a control unit to access the ISDU parameters, the necessary system functions must be purchased from the manufacturer of the control unit and used.

5.3.4 Near Field Communication (NFC)

NFC (Near Field Communication) refers to a standard for wireless data transfer between different devices over short distances.

The ECBPMi functions as a passive NFC tag that can be read or written by a read or write device which has NFC activated, such as a smartphone or tablet. Access to the ECBPMi's parameters via NFC also works when the supply voltage is not connected.

There are two options for communicating via NFC:

- Read access only can be obtained via a website viewed in a browser. For this, no additional app is needed. The reading device requires only that NFC and the Internet connection are enabled.
- Another option for communication is the "Schmalz ControlRoom" control and service app. In addition to pure read access, the app allows you to actively write the parameters of the device via NFC. The "Schmalz ControlRoom" app is available in the Google Play Store or Apple App Store.

For the best data connection, place the reading device on the NFC symbol in the middle of the ECBPMi.



The reading distance is very short for NFC applications. Determine the position of the NFC antenna in the reading device used. If parameters of the device are modified via IO-Link or NFC, then the power supply must subsequently remain stable for at least three seconds to prevent data loss.

5.4 Lifting the Workpiece

The ECBPMi is designed for vacuum handling of parts in combination with suction systems and collaborative robots.

The electrical pump is activated and deactivated via the "suction" signal input.

An integrated sensor measures the vacuum generated by the pump. The vacuum level is evaluated by an electronics system and, in SIO mode, issues a signal on digital output OUT2 when a preset or specified vacuum limit value H2 is exceeded. The set vacuum limit value H2 can also be indicated visually in the vacuum display and changed using the buttons.

The ECBPMi has an integrated energy-saving feature. When the machine is in "Suction" mode, it automatically controls the vacuum to keep it at the preset vacuum limit value H1 in accordance with the default settings.

5.5 Automatic Operation

Once the product is connected to the power supply, it is ready for operation and enters automatic mode. This is the normal operating mode, in which the product is operated by the system control unit.

5.6 Monitoring the System Vacuum and Displaying the Control Value

The device has an integrated vacuum sensor for monitoring the current system vacuum. When you press a touch capacitive button in SIO mode, the current limit value H2 is displayed above the "vacuum display field." Note: In IO-Link mode, the "Setpoint H2" parameter [0x0066] is displayed in profile P0.

The limit value H2 is displayed in the front section of the segmented display and can be set using the touch capacitive buttons.

For control purposes, the limit values are used to control the pump cycle speed.

Overview of the vacuum limit values:

Limit value	Description
H1	Vacuum limit value/control value
H1 - h1	Deactivation value of vacuum limit value
H2	Activation value of "part present" check signal output
H2 - h2	Deactivation value of "part present" check signal output

The current, minimum and maximum applied vacuum (since the supply voltage was applied) can be read from the parameters "Vacuum value, live / Vacuum value, min / Vacuum value, max" [0x0040]. The maximum and minimum values can be reset with the command 0xA9 using the parameter "System command" [0x00002].

5.7 Setting the Vacuum Limit Value H2

Display the current set vacuum limit value H2:


- ✓ If the status of the ECBPMi is "Part Present," the LED ring remains lit up in blue (default setting, the color is freely adjustable) or if the status is "Warning," the LED lights up orange.
- ▶ Press one of the two buttons for at least one second.
- ⇒ The vacuum limit value is displayed.

The vacuum limit value is used for the "Part Present" check. It can be used to check whether a sufficient vacuum has been generated. If the vacuum limit value is exceeded, the constant blue status indicator switches to a brighter blue on the one hand and the output OUT2 is activated in SIO mode on the other. While the vacuum limit value is being set or displayed, the device can continue to be operated.

Adapt the vacuum limit value H2 for monitoring the control function to the given process conditions:

- ✓ The ECBPMi is ready for operation. There must not be any errors (red lights).

1. Press one of the buttons  or  for at least one second.

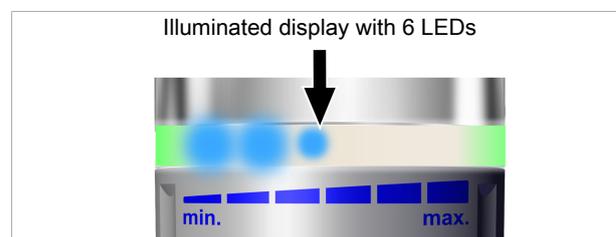

- ⇒ The indicator LEDs (at the front = blue) are activated and roughly indicate the current vacuum limit value H2. If the device is in IO-Link mode, the value of the "Setpoint H2" parameter is displayed in the production setup profile P0.
- ⇒ The LED ring in the rear section does not light up.

2. Continue to press or tap the button. The vacuum limit value is lowered () or increased () immediately. When you tap a button, the value is changed by ± 10 mbar per tap.
 - ⇒ The vacuum display is changed accordingly.
3. The new set value is saved by pressing the buttons  and  simultaneously for more than one second.
 - ⇒ This is indicated by a blue flashing light in the LED status indicator.

If you wait for more than five seconds to press the buttons simultaneously after making the adjustment, the set value is not saved. This is indicated by an orange flashing light in the LED status indicator.

If the device is in IO-Link mode, the vacuum limit value is specified directly via the "Setpoint H2 demand" process data byte. If the process data byte is written as "0," the corresponding value from the "Setpoint H2" parameter becomes valid, depending on the activated production profile set.

In IO-Link mode, the aforementioned procedure for displaying and changing the vacuum limit value is used to display or change the value in the "Setpoint H2" parameter [0x0066] in the production setup profile P0. (This only corresponds to the currently valid vacuum limit value H2 if profile P0 has been activated using process data and the "Setpoint H2" process data byte is written as 0.)

The option to change the vacuum limit value H2 using the touch capacitive buttons can be disabled ([> See ch. 5.14 Device Functions, p. 24](#)).

5.8 Calibrating the vacuum sensor

Since the production conditions for the integrated vacuum sensor can vary, we recommend calibrating the sensor once it is installed. To calibrate the vacuum sensor, the system's vacuum circuit must be open to the atmosphere.



A zero offset is only possible in the range of ± 3 percent of the end value of the measuring range.

If the permissible limit of $\pm 3\%$ is exceeded, the LED status display and various diagnostic channels display ([> See ch. 5.17.1 Displaying Errors, p. 27](#)) via IO-Link.

Via IO-Link, the sensor zero-point adjustment command is executed using the parameter "System command" 0x0002 with the value 0xA5 for Calibrate vacuum sensor.

5.9 Suction Functions

To lift the workpiece, the ECBPMi can be operated either in continuous suction mode or in control mode. The selection is made via "control mode" in the output data byte. In SIO mode, the "control mode" parameter [0x004E] in the production setup profile P0 determines the operating mode.

5.9.1 Sustained Suction

The ECBPMi sustains suction at the set power or motor rotation speed. The setting is made in IO-Link mode using the bit "control mode" = 1 (speed demand) in the output process data bytes.

To set the device to continuous suction in SIO mode, this setting must first be configured using the "control mode vacuum/speed" parameter [0x004E] in the "production setup profile P0." The additional "Speed" parameter [0x0065] can then be used to specify the speed (in %) at which the pump motor should rotate (the motor only rotates from a value of around 16%).

The performance of the pump (speed of the pump motor) is set in IO-Link mode using the "setpoint for control" process data byte. Enter a value in the range from 0 to 255. If a value greater than 100 is entered, then the ECBPMi runs at full power. If the value 50 is entered, then the ECBPMi runs at half power. If the value 0 is entered, the values set in the activated profile set are used for the motor rotation speed.


5.9.2 Control

This function of the ECBPMi allows you to save energy and prevent generation of excessive vacuum levels. H1 can be specified in IO-Link mode via output process data byte 1. In SIO mode, H1 is determined using the "Setpoint H1" parameter [0x0064] in the production setup profile P0. (> [See ch. 5.19 Production Setup Profiles, p. 34](#)).

The vacuum is regulated to the vacuum limit value H1.

The leakage is also measured during regulation.

The following diagram illustrates the control function.

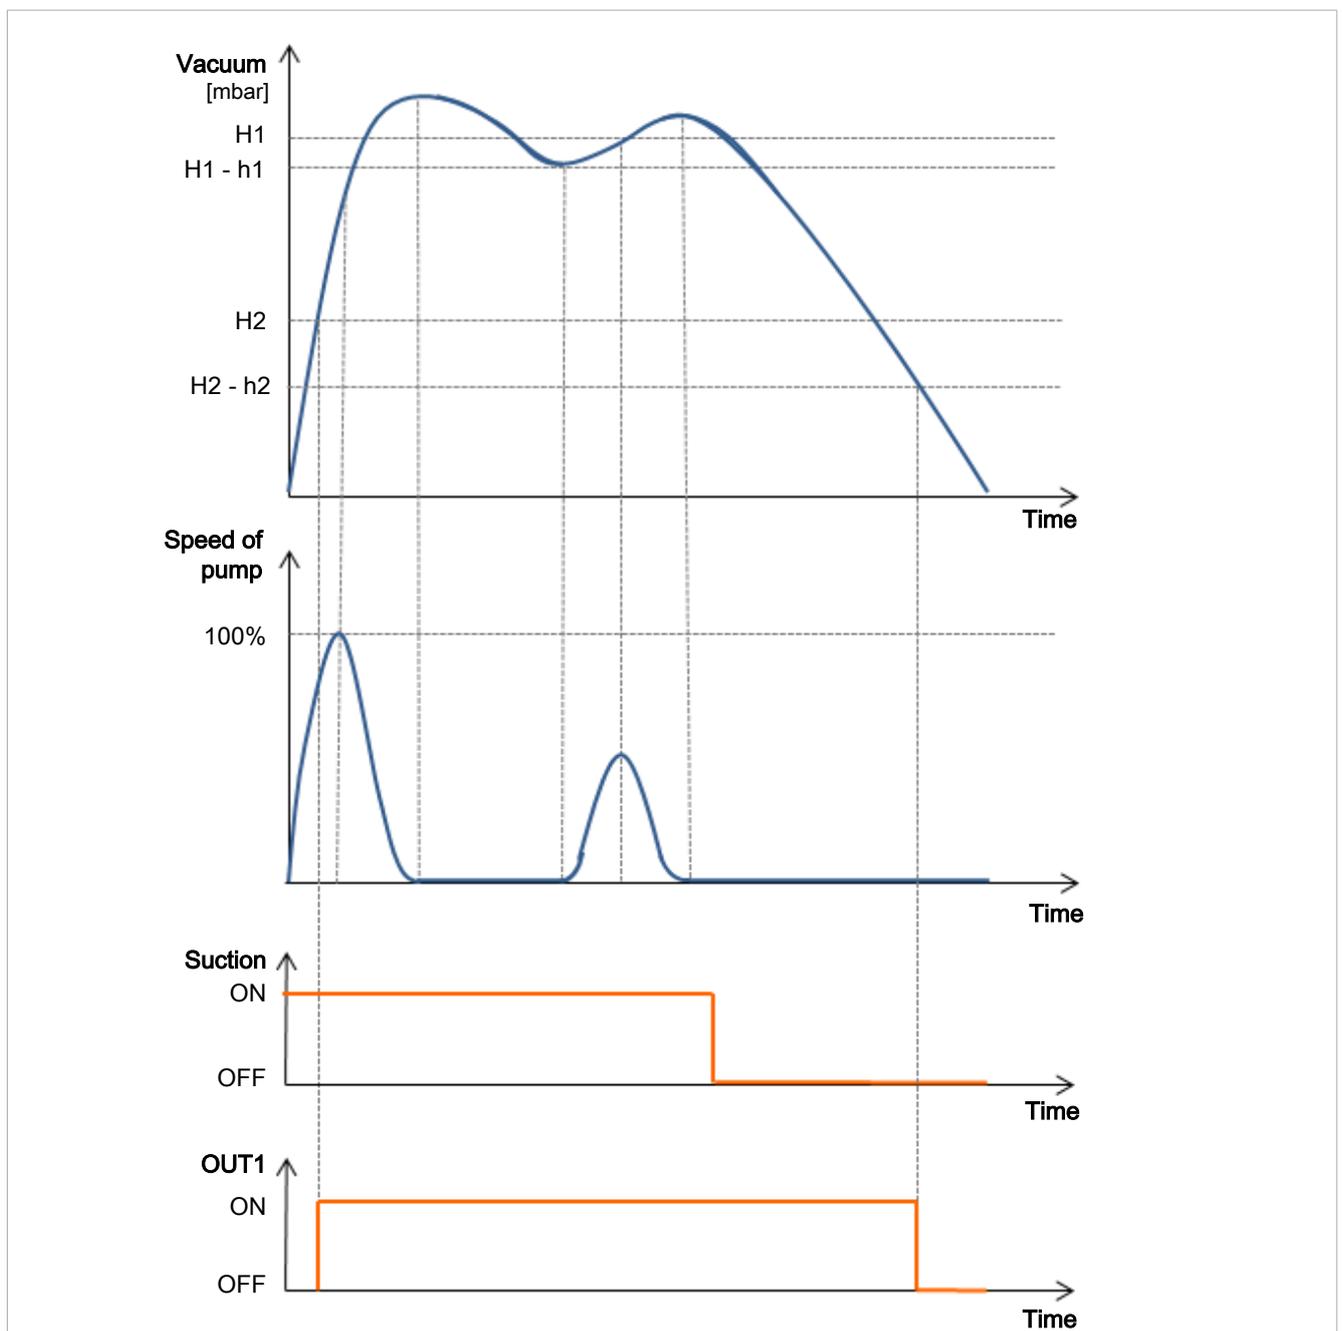

The output OUT2 for the “Part Present” check is activated when the limit value H2 is reached in SIO mode. If the limit value H2 - h2 mbar is not reached, the output is deactivated.

5.10 Drop-off Modes

The following three drop-off modes are available. The function is set in the IO-Link using the “Drop-off mode” parameter 0x0045.

If you want to change the drop-off mode for SIO operation, the parameters in the production setup profile P0 must be configured accordingly beforehand via IO-Link.

5.10.1 Externally Controlled Blowoff

In SIO mode, the “drop-off” valve is controlled directly via the “drop-off” signal input IN2 as standard. The device vents to atmosphere as long as the signal is present.

This function is activated via IO-Link with the “Externally controlled drop-off” value.

5.10.2 Internally Time-controlled Blowoff

The “drop-off” valve is automatically activated for the time period set as soon as the device leaves “suction” mode. This function makes it possible to save an output on the controller.

This function is activated via IO-Link in the parameter “Blow-Off mode” 0x0045 with the value for “Internally controlled drop-off – time-dependent.”

The duration of the blowoff time is set via the IO-Link parameter “Duration automatic drop off” 0x006A. The “Blowoff” signal overrides the “Suction” signal, even if the specified blowoff time is very long.



“Blowoff” mode can still be activated in this mode using the “Blowoff” signal input.

5.10.3 Externally Time-controlled Blowoff

The drop-off pulse is controlled externally via the “Drop-off” input IN₂. The “Drop-off” valve is activated for the specified time. A longer input signal does not increase the drop-off duration.

This function is activated via IO-Link with the “Externally controlled drop-off – time-dependent” value.

The duration of the drop-off time is set via the IO-Link “Duration automatic drop off” parameter 0x006A.

5.10.4 Setting the Blowoff Time

The drop-off time can be set for internally and externally controlled time-dependent drop-off via the IO-Link parameter “Duration automatic drop off” for each production setup (e.g. for production setup P0 in 0x006A).

This drop-off time comes into effect when externally controlled time-dependent drop-off or internally controlled time-dependent drop-off is selected as the drop-off mode.

The drop-off time is specified in milliseconds [ms].

5.11 Output and Input Signals

In SIO mode, all input and output signals are connected to the higher-level control unit (e.g. a robot) directly or via IO fieldbus boxes.

For this purpose, in addition to the power supply, two input signals and two output signals must be connected. The product communicates with the control unit via these signals.

5.11.1 Signal Inputs

The ECBPMi only has two signal inputs IN1 and IN2 in IO mode.

The "suction ON/OFF" function is assigned to signal input IN1, while the "blowoff/vent ON/OFF" function is assigned to signal input IN2.



The signal inputs and thus SIO mode are not available in the "ECBPMi Plus" model.

5.11.2 Signal Outputs

The ECBPMi has two signal outputs.

The function of vacuum limit value H2 (part present) is only assigned to signal output OUT2 in SIO mode. The output is activated when the set vacuum limit value H2 is reached.

The signal output OUT3 can be used, for example, to display the manual control of a robot (e.g. freedrive).

- ▶ The output is activated when you press the buttons  and  simultaneously for more than one second.




When guiding a robot arm, it has proven more effective to use both hands. In this case, one hand grasps the ECBPMi so that both buttons are pressed and the other hand assists with the movement of the robot arm.

5.11.3 Signal Type

The signal type can be switched between PNP and NPN. It is switched using the switches displayed in the figure.

- Switch 1: Switchover for inputs IN1 and IN2
- Switch 2: Switchover for output OUT2

OUT3 is fixed as a PNP output. In IO-Link mode, the signal type can be read using the "Signal type Input" parameter or "Signal type Output" parameter [0x0049].

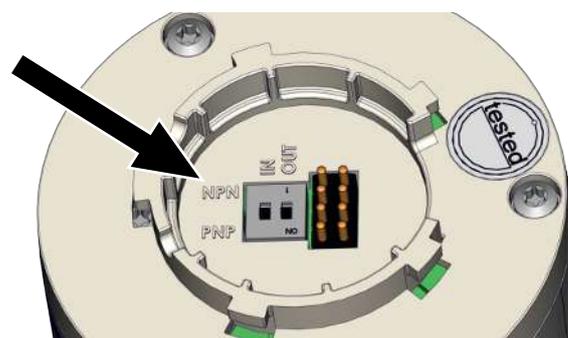

5.12 Activating a Freedrive Request

A freedrive request is used to issue a signal to set the robot to “manual control” mode (e.g. freedrive mode when using UR robots) via the higher-level control unit. This mode must be supported by the applicable robot system and configured accordingly.

In freedrive mode, the robot arm or handling system is released and can be moved to a new position manually.

Activating a freedrive request

- ✓ The ECBPMi is ready for operation and remains illuminated in blue. There must not be any errors (red lights). In addition, the device must not be in the adjustment mode for the limit value.
- 1. Press the two buttons  and  simultaneously for one second (e.g. by grasping the ECBPMi with your hand to guide the robot arm).
 - ⇒ In SIO mode, the ECBPMi switches directly to freedrive mode. The output OUT3 is then set and the color of the LED status indicator switches to a blue circumferential light.
 - ⇒ You can continue to operate the device during freedrive mode. The output OUT2 is also activated and deactivated based on the vacuum limit value H2.
 - ⇒ In IO-Link operation, bit 0 is activated in input process data byte 4 (= Freedrive desired).
 - ⇒ The digital output OUT3 is not set and the freedrive request is made via the higher-level control unit.
 - ⇒ The LED status display does not change color yet.
 - ⇒ The control unit releases the robot arm or the handling system.
- 2. Activate bit 0 (= Enable Freedrive) using the higher-level control unit in output process data byte 3.
 - ⇒ The LED status indicator switches to a blue circumferential light.
 - ⇒ This status is then confirmed to the control unit by activating the “Freedrive activated” bit.

If freedrive mode is activated via a button other than that on the ECBPMi (e.g. on the robot itself), freedrive mode can be indicated on the LED status display of the ECBPMi without it being activated via the device.

If neither button is pressed for 0.5 seconds, the ECBPMi switches back to the status from which freedrive mode was called. The output OUT3 is deactivated in SIO mode.

The freedrive request can also be deactivated via IO-Link using the “Extended Device Access Locks” parameter [0x005A] ([> See ch. 5.14.2 Restricting Extended Access with Extended Device Access Locks \[0x005A\], p. 25](#)).

5.13 Switch-Off Delay

You can use this function to set a switch-off delay for the H2 “part present” check signal. This can be used to mask short-term fluctuations in the vacuum level of the vacuum system. The duration of the switch-off delay is set in IO-Link via the parameter “Output filter” [0x004B].

The value can be set to 10, 50 or 200 ms. To deactivate this function, enter the value “off” (0 = off).

The switch-off delay affects the discrete output OUT3, the process data bit in IO-Link and the status display.



If the output is configured as a normally open contact [NO], there is an electrical switch-off delay. On the other hand, if it is configured as a normally closed contact [NC], there will be an equivalent switch-on delay.

5.14 Device Functions

Device functions can be protected against unintentional access using the “Device Access Locks” parameter [0x000C] or “Extended Device Access Locks” parameter [0x005A].

5.14.1 Restricting Access Using Device Access Locks [0x000C]

In IO-Link mode, the “Device Access Locks” default parameter is available to prevent changes to parameter values using the operating element of the ECBPMi.

Bit	Meaning
2	Local parametrization locked (The vacuum limit value H2 cannot be changed using the touch capacitive buttons.)
3	Lock HMI (The touch capacitive buttons are deactivated)

An existing lock will be retained in SIO mode.

It can only be canceled using IO-Link, not on the ECBPMi itself.

5.14.2 Restricting Extended Access with Extended Device Access Locks [0x005A]

Extended device functions can be disabled via the “Extended Device Locks” parameter [0x005A].


Bit	Meaning
0	NFC write lock (Parameter changes via NFC are blocked)
1	NFC disable (NFC deactivated. The device cannot be recognized by an NFC reader.)
4	IO-Link event lock (IO-Link events are disabled in IO-Link mode)
5	Lock Freedrive desired (The device is not able to make a freedrive request when the touch capacitive buttons are pressed. The freedrive functionality is now deactivated.)

5.15 Resetting the Device to the Factory Settings

Proceed as follows to reset the ECBPMi to the factory settings. In IO-Link mode, the function is called using the “System Command” parameter [0x0002] with 0x82. This is not visually indicated by the status LEDs.

- ✓ The ECBPMi is in the basic state control status.

1. Press one of the buttons  or  for at least one second.

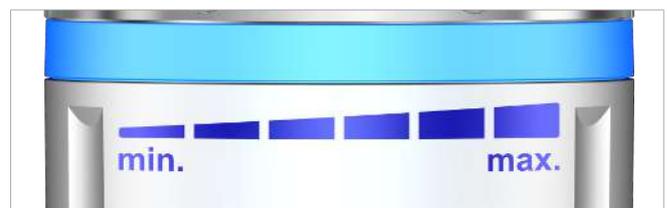


- ⇒ The ECBPMi first switches to the mode for adjusting the vacuum limit value.

2. Press and hold the  and  buttons simultaneously for more than seven seconds.

- ⇒ After one second, the ECBPMi first switches back to the basic state control status.

3. Continue to press the two buttons. After five seconds, one third of the status LEDs light up yellow; after six seconds, two thirds of the LEDs light up yellow; after seven seconds, all the LEDs flash yellow.

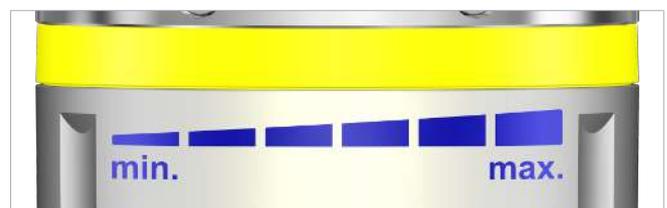

⇒ The yellow lights are activated section by section.

⇒ After they begin flashing, the ECBPMi is reset to the factory settings. It returns to the default status (continuous blue light).

The function for resetting factory settings does not affect the following elements:

- The counter readings
- The zero-point adjustment of the sensor.

5.16 Counter(s)

The ECBPMi is equipped with four internal counters that cannot be cleared.

Counter 1 Increases with each valid pulse at the "suction" signal input, meaning that it counts the suction cycles during the ECBPMi's service life. The time of the suction cycle can be read from the "Total Cycle time" parameter [0x0096].
(Vacuum-on-counter [0x008C])

Counter 2 Measures the total running time of the ECBPMi in seconds.
(Power-On Total Time [0x00A8])

Counter 3 Measures the total running time of the vacuum pump in seconds.
(Pump-ON Total time [0x00A7])

Counter 4 Counts the CM events that have occurred (> [See ch. 5.18.1.7 Condition Monitoring Events and Status Display, p. 31](#)).
(Condition Monitoring counter [0x008E])


The counters can be read via IO-Link.

Counters 1 and 3 can also be read from the erasable counters "Vacuum-on counter erasable" [0x008F] and "Condition Monitoring counter erasable" [0x0091]. The counters can be cleared with the value 0xA7 using the "System Command" parameter [0x0002].

5.17 Displaying Errors and Warnings

5.17.1 Displaying Errors

If an error occurs, the ECBPMi changes to an error state. The LED ring lights up red to indicate error states. The type of error can be identified by the repeated pulsing of the red light.

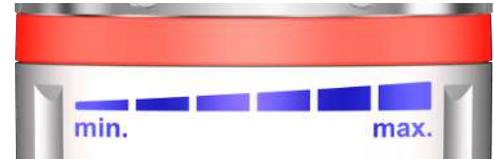

Suction cycles that are already running can be carried out to the end if an error occurs (depending on the error pattern). However, a new suction cycle cannot be started while the error is ongoing.

Warnings and errors are issued via IO-Link. They can be processed and evaluated accordingly in the higher-level control unit.

The ECBPMi monitors the following parameters:

- Supply voltage
- Internal device temperature
- Pump control unit
- Internal electronic fault
- Calibration error in the vacuum sensor

If the values are outside the permitted operating conditions or a pump is faulty, the ECBPMi switches to an error state.

The following table shows potential errors and the corresponding output on the LED status display or parameters in IO-Link:

Name	Error description	LED status display	"Active Error Code" parameter [0x0082]
Electronic Error	There is an internal electronic fault	Red (3 flashes)	0x01
Sensor Voltage too low	Supply voltage < 19.2 V	Red (1 flash)	0x02
Sensor Voltage overrun	Supply voltage > 26.4 V	Red (1 flash)	0x04
Pump not working properly	Error in the pump motor control unit	Red (3 flashes)	0x08
Temperature overrun	Permissible device temperature has been exceeded	Red (2 flashes)	0x10
Error Robot	Error bit 1 of process output byte 3 was set by the robot	Red (flashing continuously)	0x20
Sensor calibration failed	The permissible zero offset was exceeded by > ±3% after calibration of the vacuum sensor	Red (3 flashes)	0x40
EEPROM Error	Internal EEPROM error	Red (3 flashes)	0x80

The number of errors (since the supply voltage was applied) can be read using the "Error Count" parameter [0x0020].

5.17.2 Display of Warnings

Condition Monitoring (CM) events are displayed as warnings via the LED ring.

If warnings occur, this is indicated by an orange light on the LED ring.



The following table shows potential warnings and the corresponding output on the LED status display or parameters in IO-Link: The exact CM description can be found under Condition Monitoring:

CM event	Description	"Condition Monitoring" parameter [0x0092]
H1 selected under H2	The "H2 not reached" process error is issued while "SUCTION = on."	0x01
Evacuation Time t1 above limit	The evacuation time exceeds the set value.	0x02
Leakage rate above limit	The measured leakage exceeds the set value.	0x04
H1 not reached in last suction cycle	Vacuum limit value H1 not reached in the last suction cycle	0x08
Free-flow vacuum > (H2 - h2) but < H1	The value of the dynamic pressure measurement is larger than (H2 - h2), but smaller than H1.	0x10
Warning Robot	"Set warning robot" process output data bit was set by the higher-level control unit.	0x20
Vacuum under H2-h2 if Pump running and Vacuum over H2 prior	<p>During suction, the vacuum fell below the value (H2 - h2) when it had previously exceeded H2.</p> <p>This warning is triggered by a leakage that cannot be compensated by a higher pump capacity. The error is acknowledged by issuing the "suction" command again or pressing a button. The error is acknowledged in any event (regardless of whether or not the leakage is eliminated). If the leakage is not eliminated, the LEDs initially change to blue (low brightness) and H2 is not reached.</p>	0x40

5.17.3 Temperature Display

The temperature is monitored in the area of the circuit board. If the temperature exceeds an internal limit value, the ECBPMi switches off to protect against overheating. No new suction cycle can be started as long as the error state is present. The error state can only be acknowledged by setting it to an error-free state.

The error state is shown on the LED ring and/or via IO-Link (> [See ch. 5.17 Displaying Errors and Warnings, p. 27](#)).

The current, minimum and maximum temperature (since the supply voltage was applied) can be read from the parameters "Temperature, live / Temperatur, min / Temperature, max" [0x0044].

The maximum and minimum values can be reset with the command 0xA7 using the "System Command" parameter [0x0002].

5.17.4 Process Data Monitoring

IO-Link provides the current measurements for the following parameters, plus the lowest and highest values measured since switching on:

- For the system vacuum, System vacuum live Ejector / System vacuum min Ejector / System vacuum max Ejector (0x0040)
- For the supply voltage, Primary supply voltage, live / Primary supply voltage, min / Primary supply voltage, max (0x0042)

The maximum and minimum values can be reset using the appropriate system command (0x0002) with the command 0xA7.

See also

-  Displaying Errors and Warnings [▶ 27]

5.18 Energy and Process Control (EPC)

In IO-Link mode, the energy and process control (EPC) function is available. It is subdivided into three modules:

- Condition monitoring (CM): Condition monitoring to increase system availability
- Energy monitoring (EM): Energy monitoring to optimize the vacuum system's energy consumption
- Predictive maintenance (PM):
 - Predictive maintenance to increase the performance and quality of the gripping systems
 - In byte 0 of the output process data, IO-Link can be used to specify which preselected EPC values can be read using data bytes 1 + 2 of the input process data.

5.18.1 Condition Monitoring (CM)


Control Threshold Monitoring

If the vacuum limit value H1 is never reached during the suction cycle, the "H1 not reached" condition monitoring warning is triggered and the system status light switches to yellow.

This warning is available at the end of the current suction phase and remains active until the next suction cycle.

Evacuation Time Monitoring

If the measured evacuation time t_1 (from H2 to H1) exceeds the specified value, the "Evacuation time longer than t_1 " condition monitoring warning is triggered and the system status light ("Device Status" process data) switches to yellow.

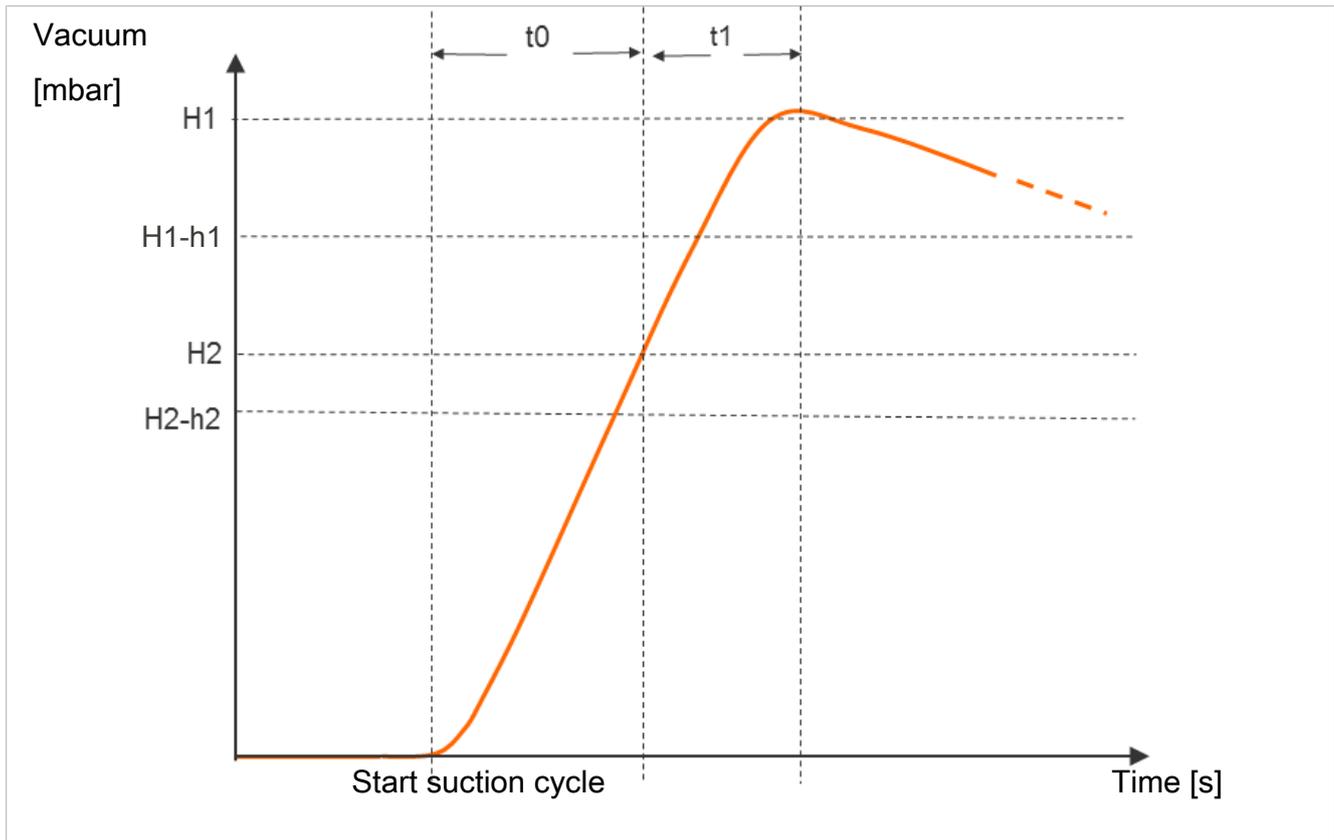

The specified value for the max. permitted evacuation time t_1 can be set using the IO-Link ("Permissible evacuation time" parameter) [0x006B]. Setting the value to "0" (= off) deactivates monitoring. The maximum permitted evacuation time setting is 9.99 s.

Measuring the Evacuation Time t_0 and t_1

Measuring the evacuation time t_0 :

The time is measured (in ms) from the beginning of the suction cycle to the time when the limit value H2 is reached ("Evacuation time t_0 " parameter [0x0094]).

Measuring the evacuation time t_1 :

The interval between reaching the limit values H2 and H1 is measured (in ms) ("Evacuation time t_1 " parameter [0x0095]).

Leakage Monitoring and Evaluation

The leakage is measured and monitored in control mode. The measurement is performed using a calculation based on the pump control values (speed and duration) when readjusting to the setpoint H1. The calculated value can be read as a volume flow rate using the "Leakage rate" parameter [0x00A0] or alternatively using the process data (EPC-Select) in ml/min.

Evaluation of the leakage level differentiates between two statuses:

Leakage L < permitted value -L-

If the leakage L is less than the set value "Permissible leakage rate"

- The condition monitoring warning is not activated
- There is no effect on the system status light and the display on the LED ring

Leakage L > permitted value -L-

If the leakage L is greater than the set value "Permissible leakage rate"

- The condition monitoring warning is activated
- The system status light switches to yellow and a warning (orange) is displayed on the LED ring

The "Permissible leakage rate" can be set via IO-Link using the "permissible leakage rate" parameter e.g. [0x006C].

Monitor Dynamic Pressure

If possible, a dynamic pressure measurement is taken at the start of every suction cycle (vacuum during unobstructed suction). The result of this measurement is compared to the limit values set for H1 and H2.

If the dynamic pressure is greater than (H2 – h2) but less than H1, the corresponding condition monitoring warning is triggered, the system status light switches to yellow and a warning (orange) is displayed via the LED ring.

Condition Monitoring Autoset

The "CM Autoset" process data function allows the condition monitoring parameters for the maximum permitted leakage "Permissible leakage rate" and the evacuation time (t-1) "Permissible evacuation time" to be determined automatically.

The actual values from the last suction cycle are combined with an additional tolerance and stored in the parameter data of production setup P0.

Feedback about the completed "CM Autoset" function is displayed via input process data byte 0 "CM Autoset acknowledged."

Condition Monitoring Events and Status Display

Any condition monitoring events that occur during the suction cycle cause the system status indicator light to immediately switch from green to yellow. The event that caused this switch can be seen in the "Condition monitoring" IO-Link parameter [0x0092].

The table below explains the coding of the condition monitoring warnings:

Bit	Event	Update
0	The setting for H1 was smaller than H2	Constant
1	Set limit value t_1 for evacuation time exceeded	Cyclic
2	Set limit value "Permissible leakage rate" for leakage exceeded	Cyclic
3	Vacuum limit value H1 was not reached	Cyclic
4	Dynamic pressure $> (H2 - h2)$ and $< H1$	As soon as a corresponding dynamic pressure value has been determined
5	Bit 2 of process output data byte 3 was set by the robot. This indicates a warning status for the robot.	Constant
6	"H2 not reached" process error is issued while SUCTION = on.	Cyclic
7	Temperature above 50° C	Constant

Bits 1–3 and 6 describe events that can only occur once per suction cycle. They are reset at the start of every suction cycle and remain stable until it has ended.

Bit number 4, which describes dynamic overpressure, is initially deleted when the device is switched on and is updated when a dynamic pressure value is detected.

Bits 5 to 7 are regularly updated independently of the suction cycle and reflect the current values.

The values measured by the condition monitoring, namely the evacuation times t_0 and t_1 and the leakage value, are reset at the beginning of the suction and updated once they have been measured.

Bit 6: This warning is triggered by a leakage that cannot be compensated by a higher pump capacity. The error is acknowledged by issuing the "suction" command again or pressing a button.

The error is acknowledged in any event (regardless of whether or not the leakage is eliminated). If the leakage is not eliminated, the LEDs initially change to blue (low brightness) and H2 is not reached.

5.18.2 Energy Monitoring (EM) [0x009D]

In order to permit optimization of vacuum gripping systems' energy efficiency, the product provides a function for measuring and displaying the energy consumption. The electrical energy consumed by the device and by the valve coil (-n) during a suction cycle is measured and given in watt-seconds (Ws). The value can be read from the "Energy consumption per cycle" parameter [0x009D].

The measured value is reset at the beginning of the suction cycle and constantly updated during the running cycle. Thus no further changes can occur after venting has finished. For determining the electrical energy consumption, the neutral phase of the suction cycle must also be considered. Therefore the measured values can be updated only when the next suction cycle begins. During the entire cycle, they represent the results from the previous cycle.



The product is not a calibrated measuring device. However, the values may be used as a reference and for comparison measurements.

5.18.3 Predictive Maintenance (PM)

Overview of Predictive Maintenance (PM)

To allow early detection of wear and other impairments to the vacuum gripping system, the product provides functions for recognizing trends in the quality and performance of the system. This is accomplished using the measured values for leakage and dynamic pressure.

The measurement value for the leakage rate and the related quality assessment in percent are reset at the start of every suction cycle and constantly updated during the cycle as moving averages. The values therefore only remain stable after the end of suction and can be read from the "Quality" parameter 0x00A2.

Measure Leakage (0x00A0)

The leakage is measured and monitored in control mode. The measurement is performed using a calculation based on the pump control values (speed and duration) when readjusting to the vacuum limit value H1. The calculated value can be read as a volume flow rate using the "Leakage rate" parameter 0x00A0 or alternatively using the process data (EPC-Select) in ml/min.

Measurement of Dynamic Pressure [0x00A1]

This measures the system vacuum achieved during unobstructed suction. The measurement length is approx. 1 s. Thus evaluation of a valid dynamic pressure value requires at least one second of unobstructed suction after the suction cycle has commenced. The suction point must not be occupied by a component at this time.

Measured values below 5 mbar or above the vacuum limit value H1 are not regarded as valid dynamic pressure measurements and are discarded. The result of the last valid measurement is retained.

Measured values that are below the vacuum limit value H1 but simultaneously above the vacuum limit value H2 – h2 result in a condition monitoring event.

The dynamic pressure and the percentage performance value based on it are initially unknown when the product is switched on. As soon as a dynamic pressure measurement can be performed, the dynamic pressure and the performance evaluation are updated and retain their values until the next dynamic pressure measurement. The value can be read from the "Free-flow vacuum" parameter [0x00A1].

Quality Assessment

To evaluate the entire gripping system, the device calculates a quality rating based on the measured system leakage.

The greater the leakage in the system, the worse the quality rating of the gripping system. Conversely, low leakage results in a high quality rating.

The quality assessment can be read out using the parameter "Quality" 0x00A2. The value indicates the quality relative to a leakage-free system in %.

Performance Calculation [0x00A3]

The performance calculation helps in evaluating the system status. The performance of the gripping system can be assessed based on the measurement of the dynamic pressure.

Optimal configuration of gripping systems leads to low dynamic pressure and thus to high performance. Conversely, poorly configured systems achieve low performance.

Dynamic pressure events that exceed the vacuum limit value (H2 – h2) always result in a performance rating of zero percent. A dynamic pressure value of 0 mbar (which indicates that no valid measurement value could be obtained) also results in a performance rating of zero percent.

The value can be read from the "Performance (flow)" parameter [0x00A3].

Maximum Device Temperature that Occurred [0x00A9]

The "Maximum temperature" parameter [0x00A9] specifies the highest device temperature measured during the life cycle.

Maximum Vacuum Reached in the Last Cycle [0x00A4]

The “Maximum reached vacuum in last cycle” parameter [0x00A4] can be used to obtain the highest vacuum measured in the last cycle. In “continuous suction” mode, this can provide information about the pump capacity.

5.19 Production Setup Profiles

In IO-Link mode, the product can store up to four different production setup profiles (P0 to P3). All important parameter data for workpiece handling is stored in these profiles. The profile is selected by means of the output process data byte 0. Thus parameters can be adjusted to suit differing process conditions.

Production setup profile P0 is selected as the basic setting and in SIO mode, i.e. the settings that are valid for SIO mode are determined by profile P0.

5.20 Device Data

The product provides a range of identification data that can be used to uniquely identify a specific device. The following parameters can be queried via IO-Link or NFC:

- Manufacturer name and web address of the manufacturer (Vendor name [0x0010] / Vendor text [0x0011])
- Supplier text (Product ID [0x0013])
- Product name and product text (Product name [0x0012] / Product text [0x0014] / Product text detailed [0x00FE])
- Serial number (Serial number [0x0015])
- Version status of the hardware and firmware (Hardware revision [0x0016] / Firmware revision [0x0017])
- Unique device ID and device properties (Unique Device ID [0x00F0])
- Article number and development status (Article number [0x00FA] / Article revision [0x00FB])
- Date of manufacture and installation (Manufacture date [0x00FC] / Installation date [0x00FD])
- Location identifier (Geolocation [0x00F6])
- System configuration (Device features [0x00F1])
- Device ID (Equipment identification [0x00F2])
- Web link for NFC app and device description file (Link to IOT-Server [0x00F8] / Weblink to IODD [0x00F7])

5.21 User-Specific Localization

The following parameters are available when saving user-specific information in every individual copy of the product:

- ID of the installation location (Equipment identification [0x00F2])
- ID of the storage location (Storage location [0x00F9])
- Equipment identification from the circuit diagram (Application specific tag [0x0018])
- Installation date (Installation Date [0x00FD])

The parameters are ASCII character strings with the maximum length given in the data dictionary. They can also be used for other purposes if necessary.

5.22 Robot-specific Device Data

The following parameters are available when saving data relating to the robot tool measurement in every individual copy of the product:

- Operating point position / coordinates of the tool in x, y, z (Tool Center Point [0x0083])
- Operating point alignment of the tool in α , β , γ (Tool Center Point [0x0083])
- Center of gravity position / coordinates of the tool (Center of Gravity [0x0084])
- Gripper shape (Grippershape [0x0055])
- End effector dimensions for length, width and height (Length, Width, Height [0x0055])
- End effector weight (Weight [0x0056])

All values can be reset to the factory setting (default) using the "System Command" parameter [0x0002] with the 0xAD command.

5.23 Device Status

In IO-Link mode, further status information is available in addition to the error messages displayed in SIO mode.

More details on this can be found in the final section of the enclosed data dictionary

- Device Status (process data)
- Device Status [0x0024] and [0x0025] (parameter data)
- Extended Device Status [0x008A](type + ID)
- NFC status [0x008B]
- IO-Link events

Any condition monitoring events that occur during the suction cycle cause the system status light to immediately switch from green to yellow/orange. The specific event that caused this switch can be seen in the "Condition monitoring" IO-Link parameter [0x0092].

6 Checking the Delivery

The scope of delivery can be found in the order confirmation. The weights and dimensions are listed in the delivery notes.

1. Compare the entire delivery with the supplied delivery notes to make sure nothing is missing.
2. Damage caused by defective packaging or occurring in transit must be reported immediately to the carrier and J. Schmalz GmbH.

7 Installation

7.1 Installation Instructions



CAUTION

Improper installation or maintenance

Personal injury or damage to property

- ▶ Prior to installation and before maintenance work, the vacuum generator must be disconnected from the power supply and secured against unauthorized restart!

For safe installation, the following instructions must be observed:

Use only the connectors, mounting holes and attachment materials that have been provided.


Firmly connect and secure pneumatic and electrical line connections to the vacuum generator.

7.2 Mechanical Attachment


The ECBPMi may be installed in any position.

The ECBPMi can be adapted to a collaborative robot using a robot-specific flange adapter plate and connection cable. The markings and/or a positioning pin on the flange and a marking on the housing of the ECBPMi must be observed, because these determine the orientation of the display and the suction cup on the robot.


Flange connection: The angle of rotation of the bayonet flange is limited to 15° by stops.

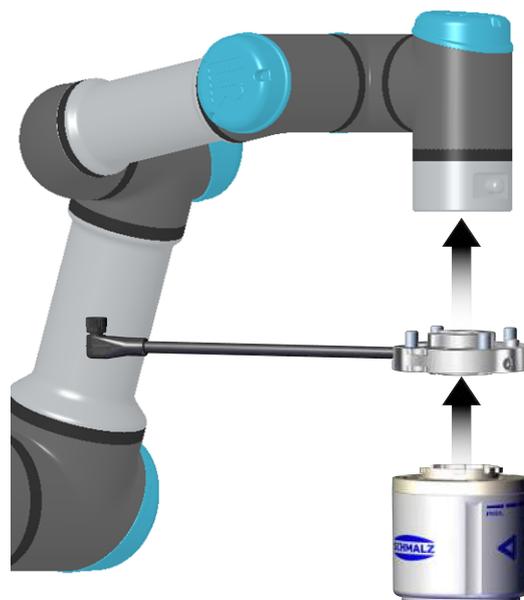

1. Unscrew and remove the set screw (1)  to detach the flange adapter plate from the ECBPMi .

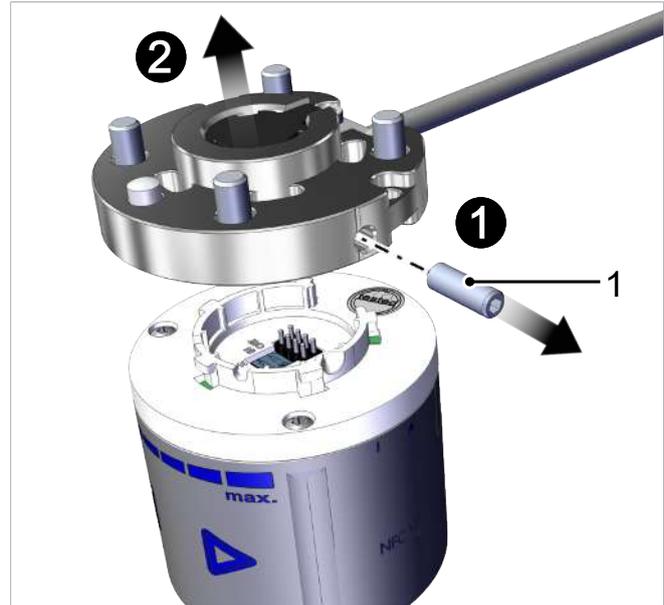


2. Position the flange adapter plate included in the delivery on the suitable collaborative robot using the positioning pin and fasten it using the four M6x12 cylinder head screws. Observe the permitted tightening torque for the thread.

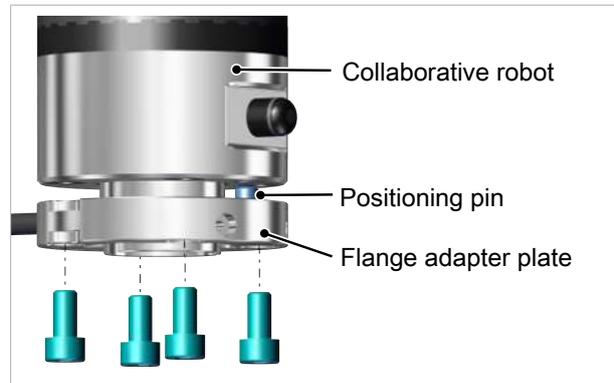

3. Tightly connect the ECBPMi to the flange adapter plate using the bayonet fastener. Position the ECBPMi so that the small triangle points toward the groove on the flange adapter plate.



4. Turn the ECBPMi clockwise by 15° (until it stops) (the line marking matches the groove on the adapter flange).

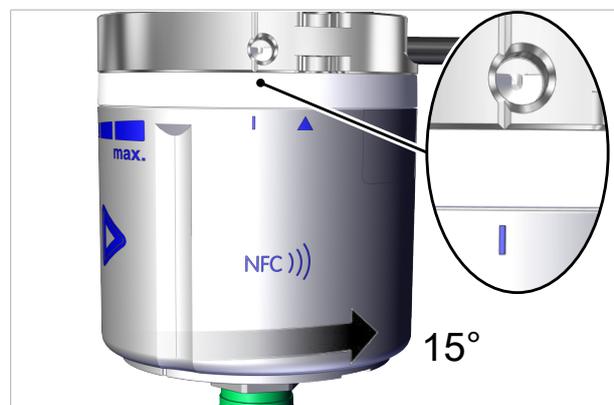


5. **NOTE! End position is not reached and the line on the ECBPMi does not match the groove on the flange. Screwing in the set screw will damage the fiber optics.** Then use the set screw (1) to prevent unintentional opening of the attachment. Observe the max. tightening torque of 0.2 Nm.
Optional: Use low-strength threadlocker.



6. To attach the vacuum suction cup, vacuum end effector or custom gripper:
» Use the bottom universal flange interface with 4x M4 internal thread with a maximum tightening torque of 1.3 Nm or
» The central 1/4 inch internal thread interface with a maximum tightening torque of 2.0 Nm

When using the Schmalz modular system VEE, the mounted flange plate must be aligned to the marking (1).

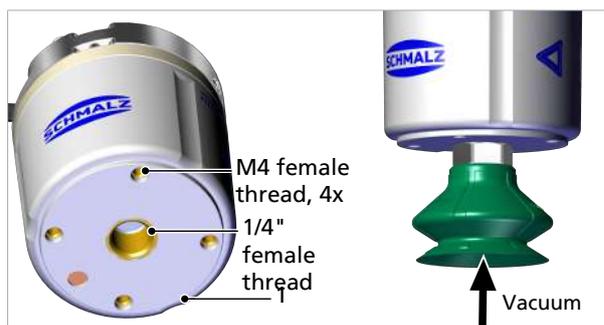

7.3 Compatibility of the Schmalz Software for UR Robot Systems

Suitable Schmalz URCap software with the current version no. V4.3.6 is a requirement for the safe operation of the ECBPMi Plus model. Schmalz URCap is not downward compatible.

Below you will find the requirements or the description of the required software:

- Schmalz URCap (V4.3.6) valid for ECBPMi and ECBPMi PLUS on robot systems from UR with the control software Polyscope 5.8 or higher (used in UR e series).
- Schmalz URCap (V4.3.6) valid for ECBPMi on robot systems from UR with the control software Polyscope 3.12 or higher (used in UR CB series).



ECBPMi Plus is not compatible with Universal Robots CB series (Polyscope 3.x).

7.4 Description of the Electrical Connection



⚠ WARNING

Electric shock

Risk of injury

- ▶ Operate the product using a power supply unit with protected extra-low voltage (PELV).



⚠ CAUTION

Changing output signals when the product is switched on or plug is connected

Personal injury or damage to property!

- ▶ The electrical connection must be performed only by specialists who can evaluate the effects of signal changes on the overall system.



⚠ CAUTION

Risk of getting caught by the connection cable when the collaborative robot moves.

Injury due to limbs or hair getting caught.

- ▶ Route the connection cable as close to the robot arm as possible.
- ▶ Avoid the danger zone.


The electrical connection of the ECBPMi (the voltage supply and the transmission of input and output signals) is directly connected to the electrical interface of the robot using the adapted connection cable on the flange.

Carry out assembly or disassembly work only when the device is disconnected from the power supply. Electrical connections must be firmly connected to the ECBPMi and secured.

When connecting to the electrical supply, take note of the following:

- The maximum length of the connection cable is 20 m.
- The maximum length of the connection cable for the "ECBPMi Plus" is 10 m.


1. Connect the connection cable on the robot (1).

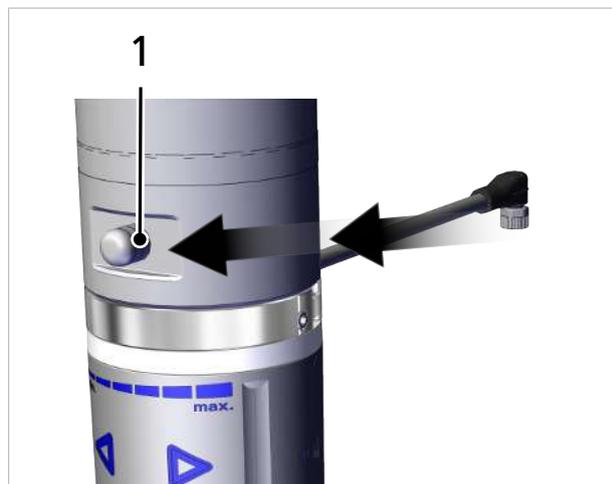


2. Optional: Use cable ties to fasten the connection cable to the drilled holes on the flange so that it is laid tightly against the robot arm.



The electrical interface to the robot is customer-specific. The PIN assignment on the flange connector (1) is always the same.

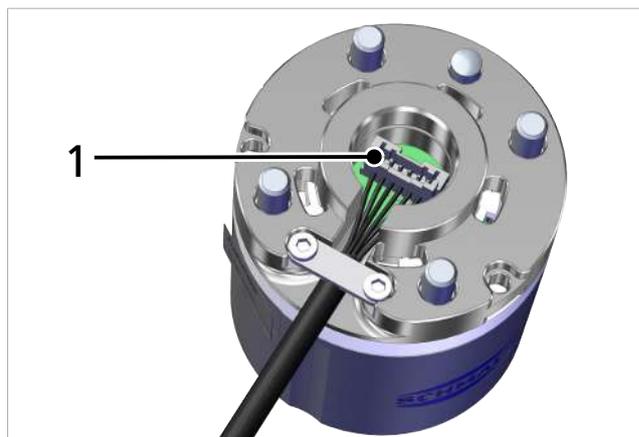


Pin assignments, 6-pin flange connector

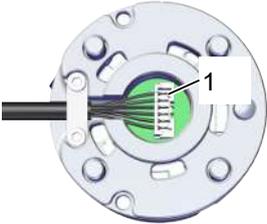Flange connector	PIN	Symbol	Function
	1	IN2	"Blow off" signal input
	2	IN1	"Suction" signal input
	3	OUT3	Optional signal output (e.g. activate freedrive)
	4	OUT2	Signal output for "Part Present"/IO-Link
	5	GND	Ground
	6	U	24 V supply voltage


Pin assignments, flange set for Schmalz standard M12 8-pin connector

8-pin M12 connector	Pin	Symbol	Function
	1	—	—
	2	U	24 V supply voltage
	3	—	—
	4	IN1	"Suction" signal input
	5	OUT2	Signal output for "Part Present"/IO-Link
	6	IN2	"Blow off" signal input
	7	GND	Ground
	8	OUT3	Optional signal output (e.g. activate freedrive)

Pin assignments, UR M8 flange set

8-pin M8 connector	Pin	Symbol	Function
	1	—	—
	2	—	—
	3	OUT2	Signal output for "Part Present"/IO-Link
	4	OUT3	Optional signal output (e.g. activate freedrive)
	5	U	24 V supply voltage
	6	IN1	"Suction" signal input
	7	IN2	"Blow off" signal input
	8	GND	Ground

Pin assignments, UR M8 ECBPMi Plus flange set

8-pin M8 socket	Pin	Litz wire color	Function
	1	White	Communication line RS485+
	2	Brown	Communication line RS485-
	3	Green	OUT2, "part present"/IO-Link signal output
	4	Yellow	OUT3, freedrive
	5	Gray	U, +24 V supply voltage
	6	Pink	Digital IN1
	7	Blue	Digital IN2
	8	Red	GND, ground

7.5 Start of Operations

As soon as power is supplied to the ECBPMi via the higher-level control unit, it is ready for operation. If the robot is active, the ECBPMi performs an internal test run and then lights up continuously blue.

The vacuum (p) of the ECBPMi is routed to the vacuum gripping system/suction cup via the 1/4 inch thread.

When using any grippers, ensure that the connection between the gripper and the ECBPMi is airtight.



A typical handling cycle is divided into the following three phases: suction, blow off and idle.

To check whether sufficient vacuum has built up, the limit value H2 is monitored by an integrated vacuum sensor during suction and output to the higher-level control unit via OUT2.

Phase	Switching step	ECBPMi		
		Signal	Status	
1	1		IN1	Suction ON
	2		OUT2	Vacuum > H2
2	3		IN1	Suction OFF
	4		IN2	Drop-off ON
3	5		OUT2	Vacuum < (H2-h2)
	6		IN2	Drop-off OFF

Signal state change from inactive to active Signal state change from active to inactive

8 Operation

8.1 Hazard during Operation



CAUTION

Falling objects due to a sudden drop in vacuum (e.g. a power failure)

Risk of injury from falling parts!

- ▶ Wear protective work shoes (S1).



CAUTION

A strong vacuum is produced on the suction cup and suction lines.

Hair, skin, body parts and items of clothing can be sucked in.

- ▶ Wear protective glasses and tight-fitting clothing.
- ▶ Use a hairnet if necessary.
- ▶ Do not look or reach into the suction cup openings.

8.2 Preparations



WARNING

Extraction of hazardous media, liquids or bulk material

Personal injury or damage to property!

- ▶ Do not extract harmful media such as dust, oil mists, vapors, aerosols etc.
- ▶ Do not extract aggressive gases or media such as acids, acid fumes, bases, biocides, disinfectants or detergents.
- ▶ Do not extract liquids or bulk materials, e.g. granulates.

The following measures must be taken each time the device is activated:

1. Check the device for visible damage. Correct any faults or report them to the supervising personnel.
2. Ensure that only authorized persons are present in the working area of the machine or system in order to prevent any hazard from switching on the machine.
3. Ensure that the danger zone of the machine or system is free of persons during automatic operation in non-HRC applications.

8.3 Operating Modes

The ECBPMi may be operated in two modes:

- SIO mode, with direct connections at inputs and outputs (SIO = standard I/O). SIO mode is not available in the "ECBPMi Plus" model
- IO-Link mode, with a communications line (IO-Link)
- RS485 operation for the "ECBPMi Plus" model

By default, the ECBPMi always runs in SIO mode, but it can be switched into and out of IO-Link mode at any time using an IO-Link master.

8.3.1 SIO Operating Mode

During operation in SIO mode, all input and output signals are connected to a control unit, either directly or using intelligent terminal boxes.

For this purpose, in addition to the power supply lines, one or two input signals and two output signals must be connected. The device communicates with the control unit via these signals.

This enables use of the basic functions "Suction" and "Blowoff" as well as providing "Parts Present" feedback.

The individual basic functions are:

Inputs	Outputs
Suction ON/OFF (IN ₁)	H2 (part present) feedback (OUT2)
Blowoff ON/OFF (IN ₂)	Freedrive desired

If the device is operated in the "internally time-controlled" drop-off mode, then the "drop-off" signal is not required. This allows operation on a single port in a configurable terminal box (using 1xDO and 1xDI). For this purpose, the parameters in "production setup profile P0" must be configured accordingly beforehand via IO-Link.

8.3.2 IO-Link Operating Mode

During operation in SIO (digital communication) mode, the power supply voltages and the communication line are connected to a control unit, either directly or using intelligent terminal boxes. The ECBPMi can be finely parameterized in IO-Link mode.

When the ECBPMi is connected via IO-Link, the following functions are enabled in addition to the basic functions:

- Selection between four production setup profiles
- Error messages and warnings
- Status display of the system
- Access to all parameters
- Condition monitoring
- Energy monitoring
- Predictive maintenance
- Robot-specific Device Data

All modifiable parameters can be read, modified and written back to the ECBPMi by the higher-level control unit.

Evaluation of the condition monitoring and energy monitoring results affords direct feedback regarding the current handling cycle as well as trend analysis.

The ECBPMi supports IO-Link version 1.1 with six bytes of input data and four bytes of output data.

The exchange of process data between the IO-Link master and the ECBPMi is cyclical. Parameter data (acyclical data) is exchanged by the user program in the control unit using communication modules.

8.3.3 Operating Mode RS-485

In the "ECBPMi Plus" model, the device communicates via a specific RS-485 protocol. Suitable software is required to use this model (> [See ch. 7.3 Compatibility of the Schmalz Software for UR Robot Systems, p. 39](#)), e.g. URCap. This model can only be operated on compatible Universal Robots. (ECBPMi Plus is not compatible with Universal Robots CB series).

For instructions on using this model --> see the ECBPMi Plus gripping system Quick Start Guide.

9 Maintenance

9.1 Safety

Maintenance work may only be carried out by qualified personnel.



WARNING

Risk of injury due to incorrect maintenance or troubleshooting

- ▶ Check the proper functioning of the product, especially the safety features, after every maintenance or troubleshooting operation.

Opening the device will damage the “tested” label. This voids the warranty.

9.2 Cleaning the Device

1. Remove exterior dirt with a soft, damp cloth and soap suds (max. 60° C).
2. Ensure that the housing and control unit are not soaked with soap suds.

9.3 Cleaning the Sieve Insert

There is a sieve insert in the vacuum opening of the CobotPump. Dust, shavings and other solid materials may accumulate in this sieve over time.

- ▶ If the performance drops noticeably, clean the sieve with a paintbrush.

If it is heavily soiled, you can send the CobotPump to Schmalz for repair (subject to a fee, the soiled sieve is replaced).

9.4 Replacement of the Device with a Parameterization Server

The IO-Link protocol provides an automated process for transferring data when a device is replaced. For this Data storage mechanism, the IO-Link master mirrors all setting parameters for the device in a separate non-volatile memory. When a device is swapped for a new one of the same type, the setting parameters for the old device are automatically saved in the new device by the master.

- ✓ The device is operated on a master with IO-Link version 1.1 or higher.
- ✓ The Data storage feature in the configuration of the IO-Link port is activated.
- ▶ Ensure that the new device is restored to the factory settings **before** it is connected to the IO-Link master. If necessary, reset the device to the factory settings.
- ⇒ The device parameters are automatically mirrored in the master when the device is configured using an IO-Link configuration tool.
- ⇒ Changes to the parameters made in the user menu on the device or via NFC are mirrored in the master.

Changes to the parameters made by a PLC program using a function module are **not** automatically mirrored in the master.

- ▶ Manually mirroring data: After changing all the required parameters, execute ISDU write access to the parameter “System command” 0x0002 using the command “Force upload of parameter data into the master” (numerical value 0x05) (see Data Dictionary).



Use the Parameterization server function of the IO-Link master to ensure that no data is lost when switching the device.

10 Warranty

The CobotPump is guaranteed in accordance with our general terms of sale and delivery. The same applies to spare parts, provided that these are original parts supplied by us.

We are not liable for any damage resulting from the use of non-original spare parts or accessories.

The exclusive use of original spare parts is a prerequisite for the proper functioning of the CobotPump and for the validity of the warranty.

Wearing parts are not covered by the warranty.



NOTE

Use of non-original spare parts

Malfunctions or damage to the equipment

- ▶ Use only original and spare parts from J. Schmalz. Otherwise the warranty is void.
-

11 Troubleshooting

General errors

Fault	Possible cause	Solution
ECBPMi does not respond	No power supply	▶ Check electrical connection and PIN assignment.
	Signal input type does not match the signal type at the robot	▶ Set the correct signal type, PNP or NPN, using the appropriate switch
Vacuum level is not reached or vacuum is built up too slowly	Press-in screen is contaminated	▶ Clean screen or have it replaced by Schmalz if necessary
	Leakage at vacuum gripper	▶ Check vacuum gripper and replace if necessary.
Load cannot be held	Vacuum level too low	▶ Check system for leakage and correct if necessary.
	Vacuum gripper too small	▶ Choose a larger vacuum gripper.
Warning is indicated by orange light.	During the suction process, the vacuum fell below the limit value H2.	<ol style="list-style-type: none"> 1. Check the system for leakage. 2. Check whether vacuum limit value H2 can be lowered.
Warning is indicated by red light	1x pulsing red light: Supply voltage outside the permitted range.	▶ Set the supply voltage correctly.
	2x pulsing red light: Device temperature is too high.	<ol style="list-style-type: none"> 1. Check the ambient temperature (permitted conditions) YES => there is an internal error; contact the Schmalz service team. 2. Let the device cool down.
	3x pulsing red light: Pump error, sensor calibration error, electronic error or EEPROM error	▶ If this error occurs repeatedly, contact the Schmalz service team.
	Continuously pulsating red light: Robot error	▶ Contact the robot manufacturer

12 Spare and Wearing Parts, Accessories

Type	Part no.	Description	Type
ECBPMi 24V-DC FK UNI	10.03.01.00500	Mini-CobotPump ECBPMi	S
ECBPMi 24V-DC FK RS-485	10.03.01.00584	Mini-CobotPump ECBPMi RS485	S
SPB1 30 ED-65 1/4" external thread	10.01.06.04530	Bellows suction cup (round)	A
SFF 20 SI-55 1/4" external thread	10.01.01.14621	Flat suction gripper (round) plus	A
SCHR 4762 M6x12 ST-8.8 VZ	20.01.02.01002	4x for fastening the flange	W
STIFT 2338 6x10 A1	20.05.01.00081	Positioning pin	S
GEW-STIF 4027-M5x16-ST-45H-VZ-T	20.05.07.00229	1x for fastening the ECBPMi to the flange	W

Legend:	W ...	Wearing part
	S _	Spare part
	A _	Accessories

The accessory parts listed here are current as of the writing of the operating instructions. An up-to-date overview of all accessory parts for the ECBPMi can be found online at www.schmalz.com

13 Disposing of the Device

1. Dispose of the product properly after replacement or decommissioning.
2. Observe the country-specific guidelines and legal obligations for waste prevention and disposal.

Component	Material
Housing	PA 12
Inner components	Aluminum alloy, brass, stainless steel, POM, silicone
Seals	NBR
Lubrication	Silicone-free
Screws	Galvanized steel

14 Attachment

See also

 ECBPMi Data Dictionary_21.10.01.00140_00.PDF [[▶ 54](#)]

14.1 EC Declaration of Conformity

EC Declaration of Conformity

The manufacturer Schmalz confirms that the product for the Mini-CobotPump described in these operating instructions fulfills the following applicable EC directives:

2014/30/EU	Electromagnetic Compatibility
2011/65/EU	Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment

The following harmonized standards were applied:

EN ISO 12100	Safety of machinery — General principles for design — Risk assessment and risk reduction
EN 61000-6-2+AC	Electromagnetic compatibility (EMC) - Part 6-2: Generic standards - Immunity for industrial environments
EN 61000-6-3+A1+AC	Electromagnetic compatibility (EMC) - Part 6-3: Generic standards - Emission standard for residential, commercial and light-industrial environments
EN IEC 63000	Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances

Other standards and technical specifications:

EN ISO 9409-1	Manipulating industrial robots – Mechanical interfaces – Part 1: Plates
DIN ISO/TS 15066:2017-04	Robots and robotic devices – Collaborative robots



The EU Declaration of Conformity valid at the time of product delivery is delivered with product or made available online. The standards and directives cited here reflect the status at the time of publication of the operating and assembly instructions.

14.2 UKCA Conformity

Declaration of Conformity (UKCA)

The manufacturer Schmalz confirms that the product described in these operating instructions fulfills the following applicable UK regulations:

2016	Electromagnetic Compatibility Regulations
2012	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations

The following designated standards were applied:

EN ISO 12100	Safety of machinery — General principles for design — Risk assessment and risk reduction
EN 61000-6-2+AC	Electromagnetic compatibility (EMC) - Part 6-2: Generic standards - Immunity for industrial environments
EN 61000-6-3+A1+AC	Electromagnetic compatibility (EMC) - Part 6-3: Generic standards - Emission standard for residential, commercial and light-industrial environments
EN IEC 63000	Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances
EN ISO 9409-1	Manipulating industrial robots – Mechanical interfaces – Part 1: Plates
DIN ISO/ TS 15066:2017-04	Robots and robotic devices – Collaborative robots



The Declaration of Conformity (UKCA) valid at the time of product delivery is delivered with the product or made available online. The standards and directives cited here reflect the status at the time of publication of the operating and assembly instructions.



IO-Link

J. Schmalz GmbH
 Johannes-Schmalz-Str. 1, D 72293 Glatten
 T: +49 7443 2403-0
 schmalz@schmalz.de



IO-Link Implementation

IO-Link Version 1.1	
Vendor ID	234 (0x00EA)
Device ID	100320
SIO-Mode	Yes
Baudrate	38.4 kBd (COM2)
Minimum cycle time	4.6 ms
Processdata input	6 byte
Processdata output	4 byte
Supported profiles	Firmware Update

Process Data

Process data In	Access	Bits	Remark
Signal H2 (part present)	ro	0	Vacuum is over H2 & not yet under H2 - h2
Signal H1 (in control range)	ro	1	Vacuum value within setpoint area (only in setpoint mode)
Control mode	ro	2	1 = Speed demand
CW-Autoset acknowledged	ro	3	Acknowledge that the autoset function has been completed
EPC-Select acknowledged	ro	4	Acknowledge that EPC values 1 and 2 have been switched according to EPC-select: 0 - EPC-Select = 00 1 - otherwise
Signal H3 (part detached)	ro	5	The part has been detached after a suction cycle
Device status	ro	7..6	00 - [green] Device is working optimally 01 - [yellow] Device is working but there are warnings 10 - [orange] Device is working but there are severe warnings 11 - [red] Device is not working properly
PD in byte 1	ro	7...0	EPC value 1 (byte) Holds 8bit value as selected by EPC-select (see PD out byte 0)
PD in byte 2	ro	7...0	EPC value 2 (word) Holds 16bit value as selected by EPC-select (see PD out byte 0)
PD in byte 3	ro	7...0	
PD in byte 4	ro	0	Freedrive desired Both buttons are activated, signaling to transfer in freedrive
PD in byte 4	ro	1	Freedrive activated Freedrive was activated on pd out 3, bit 0
PD in byte 4	ro	7..2	Reserved
PD in byte 5	ro	7...0	Reserved
Processdata Out	Access	Bits	Remark



IO-Link

J. Schmalz GmbH
 Johannes-Schmalz-Str. 1, D 72293 Glatten
 T: +49 7443 2403-0
 schmalz@schmalz.de



IO-Link		DATA	S	FUNCTION
Vacuum		0	wo	Vacuum on/off
Drop-off		1	wo	Activate drop-off
control mode		2		1 = Speed demand 0 = setpoint for control
CM-Autosect		3	wo	Perform CM-autosect function (Info: Values are being safed in selected profile) Select the function of EPC values 1 and 2 in PD in (content is 2 bit binary coded integer)
EPC-Select		5..4	wo	0: EPC value 1 = Actual power in % EPC value 2 = System vacuum (1 mbar) 1: EPC value 1 = CM-Warnings (see ISDU 146 for bit definitions) EPC value 2 = Evacuation time t1 (1 msec) 2: EPC value 1 = Leakage of last suction cycle (lml/min) EPC value 2 = Last measured free-flow vacuum (1 mbar) 3: EPC value 1 = Primary supply voltage (0.1 Volt) max.25.5V EPC value 2 = Energy consumption of last suction cycle (Ws) Select production profile (content is 2-bit binary coded integer) 0: Activate production setup profile P0 1: Activate production setup profile P1 2: Activate production setup profile
Profile-Set		7..6	wo	0: Activate production setup profile P0 1: Activate production setup profile P1 2: Activate production setup profile
Vacuum demand / setpoint for control		7..0	wo	Vacuum demand in % / setpoint for control mode H1 in 10 mbar (if 0 use data from profiles)
Setpoint H2 demand		7..0	wo	Setpoint h2 in 10 mbar (if 0 use data from profiles)
Enable Freedrive		0	wo	Enable Freedrive
Set error robot		1	wo	ECBPMi transfers in error state, LEDs red, blinking
Set warning robot		2	wo	ECBPMi transfers in warning state, LEDs orange
Reserved		7...3	wo	Reserved

ISDU Index (for IO-Link)	Subindex (for IO-Link)	Parameter	Data width	Value range	Access	Default value	Remark
16	0x0010	Vendor name	15 bytes		ro	J. Schmalz GmbH	Manufacturer designation
17	0x0011	Vendor text	15 bytes		ro	www.schmalz.com	Internet address
18	0x0012	Product name	32 bytes		ro	ECBPMi	General product name
19	0x0013	Product ID	32 bytes		ro	ECBPMi	General product name
20	0x0014	Product text	30 bytes		ro		Order-Code (partial): for complete order-code read Index 254, z.B. ECBPMi
21	0x0015	Serial number	9 bytes		ro		Serial number, z.B. 999000101
22	0x0016	Hardware revision	2 bytes		ro		Hardware revision, z.B. 00
23	0x0017	Firmware revision	4 bytes		ro		Firmware revision, z.B. 1.12

Identification

Device Management



J. Schmalz GmbH
 Johannes-Schmalz-Str. 1, D 72293 Glatten
 T: +49 7443 2403-0
 schmalz@schmalz.de



240	0x00F0	0	Unique Device Identification	20 bytes		rw	10,14,1,1,3,2,2,0,30,0,0,VendorID,Device ID, SerialNumber, z.B.:0xA0E0101030200820000 00EA 0187D7 3B8B8825
241	0x00F1	0	Device features	11 bytes		rw	
250	0x00FA	0	Article number	14 bytes		rw	z.B. 0xA0E0101030200820000
251	0x00FB	0	Article revision	2 bytes		rw	Order-Nr., z.B. 10.03.01.00500
252	0x00FC	0	Manufacture date	3 bytes		rw	Article revision, z.B. 00
254	0x00FE	0	Product text (detailed)	64 bytes		rw	Manufacture date, z.B. 119 Order-Code (complete), z.B. ECBPMi

Device Localization

24	0x0018	0	Application specific tag	0...32 bytes		rw	***
242	0x00F2	0	Equipment identification: (tag 3)	64 bytes		rw	***
246	0x00F6	0	Geolocation	64 bytes		rw	***
247	0x00F7	0	Weblink to IODD	64 bytes		rw	***
248	0x00F8	0	Link to IOT-server	64 bytes	"http://"...	rw	https://myproduct.schmalz.com/#/
249	0x00F9	0	Storage location (tag 2)	0...32 bytes	"https://"...	rw	***
253	0x00FD	0	Installation date	16 bytes		rw	***

Robot Specific Data

83	0x0053	1	Tool center point	2 bytes	0 - 65535	rw	100	Centerpoint x-axes in mm- reset by ISDU 2 by writing 0xAD
83	0x0053	2	Tool center point	2 bytes	0 - 65535	rw	100	Centerpoint y-axes in mm- reset by ISDU 2 by writing 0xAD
83	0x0053	3	Tool center point	2 bytes	0 - 65535	rw	100	Centerpoint z-axes in mm- reset by ISDU 2 by writing 0xAD
83	0x0053	4	Tool center point	2 bytes	-6283...+6283	rw	0	Angle alpha (Unit: Millirad, signed integer)- reset by ISDU 2 by writing 0xAD
83	0x0053	5	Tool center point	2 bytes	-6283...+6283	rw	0	Angle beta (Unit: Millirad, signed integer)- reset by ISDU 2 by writing 0xAD
83	0x0053	6	Tool center point	2 bytes	-6283...+6283	rw	0	Angle gamma (Unit: Millirad * 1000, signed integer)- reset by ISDU 2 by writing 0xAD
84	0x0054	1	Center of gravity	2 bytes	0 - 65535	rw	100	Center of Gravity, x-axes in mm- reset by ISDU 2 by writing 0xAD
84	0x0054	2	Center of gravity	2 bytes	0 - 65535	rw	100	Center of Gravity, y-axes in mm- reset by ISDU 2 by writing 0xAD
84	0x0054	3	Center of gravity	2 bytes	0 - 65535	rw	100	Center of Gravity, z-axes in mm- reset by ISDU 2 by writing 0xAD
85	0x0055	1	Grippershape	2 bytes	0 - 1	rw	1	0: Cuboid 1: Cylindrical - reset by ISDU 2 by writing 0xAD
85	0x0055	2	Length	2 bytes	0 - 65535	rw	100	Length of endeffector in mm- reset by ISDU 2 by writing 0xAD
85	0x0055	3	Width	2 bytes	0 - 65535	rw	100	Width of endeffector in mm- reset by ISDU 2 by writing 0xAD
85	0x0055	4	Height	2 bytes	0 - 65535	rw	100	Height of endeffector in mm- reset by ISDU 2 by writing 0xAD
86	0x0056	0	Weight	2 bytes	0 - 65535	rw	224	Weight of endeffector in g - reset by ISDU 2 by writing 0xAD

Parameter

Device Settings

Commands

2	0x0002	0	System command	1 byte		wo		0x05 (dec 5): Force upload of parameter data into the master 0x82 (dec 130): Reset device parameters to factory defaults 0xA5 (dec 165): Calibrate vacuum sensor 0xA7 (dec 167): Reset erasable counters 0xA8 (dec 168): Reset min/max values of supply voltage and temperature 0xA9 (dec 169): Reset vacuum min/max 0xAC (dec 172): Reset LED color 0xAD (dec 173): Reset robot-specific parameters
---	--------	---	----------------	--------	--	----	--	---

Access Control

12	0x000C	0	Device access locks	2 bytes	0, 4, 8, 12	rw	0	Bit 0: reserved Bit 1: reserved Bit 2: Lock local parameterization Bit 3: Lock HMI
----	--------	---	---------------------	---------	-------------	----	---	---



J. Schmalz GmbH
Johannes-Schmalz-Str. 1, D 72293 Glatten
T: +49 7443 2403-0
schmalz@schmalz.de



90	0x005A	0	Extended device access locks	1 byte	0-255	rw	0	Bit 0: NFC write lock Bit 1: NFC disable Bit 2 + 3: reserved Bit 4: IO-Link event lock (suppress sending IO-link events) Bit 5: Lock freedrive desired (freedrive disabled) Bit 6-7: reserved
91	0x005B	0	NFC PIN code	2 bytes	0-999	rw	0	Pass code for writing data from NFC app
Initial Settings								
69	0x0045	0	Drop-off mode	1 byte	0 - 2	rw	0	0 = Externally controlled drop-off (-E-) 1 = Internally controlled drop-off – time-dependent (-I-) 2 = Externally controlled drop-off – time-dependent (E-I)
73	0x0049	1	Signal type output	1 byte		ro		0 = PNP 1 = NPN
73	0x0049	2	Signal type input	1 byte		ro		Dip-Position for SIO mode 0 = PNP 1 = NPN
75	0x004B	0	Output filter	1 byte	0 - 3	rw	1	Dip-Position for SIO mode 0 = Off 1 = 10ms 2 = 50ms 3 = 200ms
82	0x0052	0	Color-Profile	8 byte	0x00-0xFF for colors, 0x00-0x64 for brightness	rw		Byte 0-3: Vacuum<H2 (0 = Red, 1 = Green, 2 = Blue, 3 = Brightness 0-100%) Byte 4- 7: Vacuum >H2 (4 = Red, 5= Green, 6= Blue, 7 = Brightness 0-100%)
Process Settings								
Production Setup - Profile P0/ Setup for SIO Mode								
78	0x004E	0	control mode vacuum/speed	1 bytes	0-1	rw	0	0 = vacuum as controlled value 1 = motor speed as controlled value only adopted in SIO mode
100	0x0064	0	Setpoint H1	2 bytes	H1 > H2 + h2; H1 < 999	rw	600	H1 Value for Control, Unit: 1 mbar
101	0x0065	0	Speed	1 bytes	0-100	rw	100	Unit: % only adopted in SIO Mode
102	0x0066	0	Setpoint H2	2 bytes	H2 < H1 - h2; H2 > h2 + 2	rw	480	Unit: 1 mbar
103	0x0067	0	Hysteresis h2	2 bytes	h2 < H1 - H2; h2 < H2 - 2; h2 >= 10	rw	20	Unit: 1 mbar
106	0x006A	0	Duration automatic drop-off	2 bytes	100 - 9999	rw	2000	Unit: 1 ms
107	0x006B	0	Permissible evacuation time	2 bytes	0, 10 - 9999	rw	1000	Unit: 1 ms, no surveillance if 0 can be set by CM autosect
108	0x006C	0	Permissible leakage rate	2 bytes	0- 2000	rw	1000	Unit: 1 ml/min, no surveillance if 0 can be set by CM Autosect
119	0x0077	0	Profile name	1...32 bytes		rw	***	
Production Setup - Profile P1								
182	0x00B6	0	Setpoint H1	2 bytes	H1 > H2 + h2; H1 < 999	rw	400	
184	0x00B8	0	Setpoint H2	2 bytes	H2 < H1 - h2; H2 > h2 + 2	rw	300	



J. Schmalz GmbH
 Johannes-Schmalz-Str. 1, D 72293 Glatten
 T: +49 7443 2403-0
 schmalz@schmalz.de



185	0x00B9	0	Hysteresis h2	2 bytes	h2 < H1 - H2; h2 < H2 - 2; h2 >= 10	rw	15
186	0x00BA	0	Duration automatic drop-off	2 bytes	100 - 9999	rw	1500
187	0x00BB	0	Permissible evacuation time	2 bytes	0, 10 - 9999	rw	400
188	0x00BC	0	Permissible leakage rate	2 bytes	0 - 2000	rw	1000
199	0x00C7	0	Profile name	1...32 bytes		rw	***

Production Setup - Profile P2

202	0x00CA	0	Setpoint H1	2 bytes	H1 > H2 + h2; H1 < 999	rw	600
204	0x00CC	0	Setpoint H2	2 bytes	H2 < H1 - h2; H2 > h2 + 2	rw	500
205	0x00CD	0	Hysteresis h2	2 bytes	h2 < H1 - H2; h2 < H2 - 2; h2 >= 10	rw	15
206	0x00CE	0	Duration automatic drop-off	2 bytes	100 - 9999	rw	2000
207	0x00CF	0	Permissible evacuation time	2 bytes	0, 10 - 9999	rw	600
208	0x00D0	0	Permissible leakage rate	2 bytes	0 - 2000	rw	1000
219	0x00DB	0	Profile name	1...32 bytes		rw	***

Production Setup - Profile P3

222	0x00DE	0	Setpoint H1	2 bytes	H1 > H2 + h2; H1 < 999	rw	500
224	0x00E0	0	Setpoint H2	2 bytes	H2 < H1 - h2; H2 > h2 + 2	rw	300
225	0x00E1	0	Hysteresis h2	2 bytes	h2 < H1 - H2; h2 < H2 - 2; h2 >= 10	rw	15
226	0x00E2	0	Duration automatic drop-off	2 bytes	100 - 9999	rw	2000
227	0x00E3	0	Permissible evacuation time	2 bytes	0, 10 - 9999	rw	1000
228	0x00E4	0	Permissible leakage rate	2 bytes	0 - 2000	rw	1000
239	0x00EF	0	Profile name	1...32 bytes		rw	***

Observation

40	0x0028	0	Process data in copy	see PD in		ro	Copy of currently active process data input (length see above)
41	0x0029	0	Process data out copy	see PD out		ro	Copy of currently active process data output (length see above)

Monitoring

64	0x0040	1	Vacuum value, live	2 bytes		ro	Vacuum value as measured by the device (unit: 1 mbar)
64	0x0040	2	Vacuum value, min	2 bytes		ro	min. value of vacuum value as measured by the device - reset by ISDU 2 by writing 0xA9
64	0x0040	3	Vacuum value, max	2 bytes		ro	max. value of vacuum value as measured by the device-reset by ISDU 2 by writing 0xA9
66	0x0042	1	Primary supply voltage, live	2 bytes		ro	Primary supply voltage (US) as measured by the device (unit: 0.1 Volt)
66	0x0042	2	Primary supply voltage, min	2 bytes		ro	min. value of primary supply voltage (unit: 0.1 Volt) - reset by ISDU 2 by writing 0xA8
66	0x0042	3	Primary supply voltage, max	2 bytes		ro	max. value of primary supply voltage (unit: 0.1 Volt) - reset by ISDU 2 by writing 0xA8
68	0x0044	1	Temperature, live	2 bytes		ro	Temperature (unit 1 °C) live
68	0x0044	2	Temperature, min	2 bytes		ro	Lowest measured temperature since power-up (unit 1 °C) - reset by ISDU 2 by writing 0xA8
68	0x0044	3	Temperature, max	2 bytes		ro	Highest measured temperature since power-up (unit 1 °C) - reset by ISDU 2 by writing 0xA8



J. Schmalz GmbH
Johannes-Schmalz-Str. 1, D 72293 Glatten
T: +49 7443 2403-0
schmalz@schmalz.de



564	0x0234	0	Communication mode	1 byte					Currently active communication mode: 0x00 = SIO mode 0x10 = IO-Link Revision 1.0 (set by master) 0x11 = IO-Link Revision 1.1 (set by master)
⊕ Diagnosis									
⊕ Device Status									
32	0x0020	0	Error count	2 byte				ro	Errors since power-on or reset 0 = Device is operating properly (GN) 1 = Maintenance required (Yellow) 2 = Out of spec. (Yellow - Red) 3 = Functional check (Yellow - Red) 4 = Failure (red)
36	0x0024	0	Device status	1 byte				ro	Information about currently pending events (event-list) Byte 1: 0x74 = error, 0xE4 = warning, 0xD4 = notification Byte 2..3 = ID Event Code (see below)
37	0x0025	0	Detailed device status	96 byte				ro	Extended device status - Type (see below) 0x10: Device operation property 0x21 Warning lower 0x22 Warning upper 0x42 Critical condition upper 0x81 Defect lower
138	0x008A	1	Extended device status - Type	1 byte				ro	Event code of current device status (see table below)
138	0x008A	2	Extended device status - ID	2 byte				ro	Result of recent NFC activity: 0x00: Data valid, write finished successfully 0x23: Write failed: write access locked 0x30: Write failed: parameter(s) out of range 0x31: value greater then limit 0x32: value lesser then limit 0x41: Write failed: parameter set inconsistent 0xA1: Write failed: invalid authorisation 0xA2: NFC not available 0xA3: Write failed: invalid data structure 0xA5: Write pending 0xA6: NFC internal error
139	0x008B	0	NFC status	1 byte				ro	00 = No error (1x blink = sensor voltage too low/high, 2x blink = temperature, 3 x blink = electronic error, pump not working properly, sensor calibration failed or EEPROM error, always blink = error robot) Bit 0 = Electronic error (IO-link connection abrupted) Bit 1 = Sensor voltage too low Bit 2 = Sensor voltage overrun Bit 3 = Pump not working properly Bit 4 = T temperatur overrun Bit 5 = Error Robot Bit 6 = Sensor calibration failed Bit 7 = reserved EEPROM
130	0x0082	0	Active error code	2 byte				ro	
⊕ Condition Monitoring [CM]									



IO-Link

J. Schmalz GmbH
 Johannes-Schmalz-Str. 1, D 72293 Glatten
 T: +49 7443 2403-0
 schmalz@schmalz.de



146	0x0092	0	Condition monitoring	2 byte	ro		Bit 0 = H1 selected under H2 Bit 1 = Evacuation time t1 above limit [t-1] last cycle Bit 2 = Leakage rate above limit [-L-] last cycle Bit 3 = H1 not reached in suction cycle last cycle Bit 4 = Free-flow vacuum > (H2-h2) but < H1 last cycle Bit 5 = Warning Robot Bit 6 = Vacuum under H2 - h2 if pump running and vacuum was over H2 prior Bit 7 = reserved
Counters							
140	0x008C	0	Vacuum-on counter	4 bytes	ro		Total number of suction cycles (stored all 30 mins)
142	0x008E	0	Condition monitoring counter	4 bytes	ro		Total number of warnings (stored all 30 mins)
143	0x008F	0	Vacuum-on counter erasable	4 bytes	ro		Can be reset by system command "Reset erasable counters" (stored all 30 mins) by writing 0xA7
145	0x0091	0	Condition monitoring counter erasable	4 bytes	ro		Can be reset by system command "Reset erasable counters" (stored all 30 mins) by writing 0xA7
Timing							
150	0x0096	0	Total Cycle time	4 bytes	ro		Total cycle time of last cycle (unit: 1ms)
148	0x0094	0	Evacuation time t0	2 bytes	ro		Time from start of suction to H2 (unit: 1 ms)
149	0x0095	0	Evacuation time t1	2 bytes	ro		Time from H2 to H1 (unit: 1 ms)
167	0x00A7	0	Pump-On total time	4 bytes	ro		Total time of pump-on-in min (stored all 30 min)
168	0x00A8	0	Power-On total time	4 bytes	ro		Total time of power-on in min (stored all 30 min)
Energy Monitoring [EM]							
157	0x009D		Energy consumption per cycle	2 bytes	ro		Energy consumption of last suction cycle (unit: 1 Ws)
Predictive Maintenance [PM]							
162	0x00A2	0	Quality (lightness)	1 byte	ro		Quality of last suction cycle (unit: 1 %)
163	0x00A3	0	Performance (flow)	1 byte	ro		Last measured performance level (unit: 1 %)
169	0x00A9	0	Maximum Temperature	2 bytes	ro		Highest measured temperature in lifecycle (unit 1 °C)
160	0x00A0	0	Leakage rate	2 bytes	ro		Leakage of last suction cycle (unit: 1 ml/min)
161	0x00A1	0	Free-flow vacuum	2 bytes	ro		Last measured free-flow vacuum (unit: 1 mbar)
164	0x00A4	0	Maximum reached vacuum in last cycle	2 bytes	ro		Maximum vacuum value of last suction cycle

Event Codes of IO-Link Events and ISDU 138 (Extended Device Status)

Event code dec hex	Event name	Event type	Extended Device Status -Type	Remark
4096 0x1000	General malfunction	Error	0x81	Internal error
6144 0x1800	Calibration OK	Notification	0x10	Calibration offset 0 set successfully
6145 0x1801	Calibration failed	Notification	0x10	Sensor calibration failed
20736 0x5100	Primary supply voltage overrun	Error	0x42	Primary supply voltage US to low (19.2/19.0V)
20752 0x5110	Primary supply voltage overrun	Error	0x42	Primary supply voltage US to high (26.8/26.6V)
16384 0x4000	CM: Temperature out of range	Warning	0x22	Temperature over 60°C
6152 0x1808	CM: Evacuation time t1 above limit	Warning	0x21	Evacuation time t1 above limit
6153 0x1809	CM: Leakage rate above limit	Warning	0x21	Leakage rate above limit
6154 0x180A	CM: H1 not reached in suction cycle	Warning	0x22	H1 not reached in suction cycle
6155 0x180B	CM: Free-flow vacuum > (H2-h2) but < H1	Warning	0x21	Free-flow vacuum > (H2-h2) but < H1
6161 0x1811	EEPROM error	Error	0x81	Wrong data in EEPROM or EEPROM fault
36003 0x8CA3	Factory reset triggered	Notification	0x10	Factory reset was triggered
6168 0x1818	Cycle completed	Notification	0x10	Cycle was completed

At Your Service Worldwide



Vacuum automation

WWW.SCHMALZ.COM/AUTOMATION

Handling systems

WWW.SCHMALZ.COM/EN-US/VACUUM-LIFTERS-AND-CRANE-SYSTEMS

J. Schmalz GmbH
Johannes-Schmalz-Str. 1
72293 Glatten, Germany
T: +49 (0) 7443 2403-0
schmalz@schmalz.de
WWW.SCHMALZ.COM