



LE-50621F/FA

Lidar Sensor

Manual

Thank you for using our products.

This manual explains the usage and safety of the product.

Read this manual carefully and pay attention to safety during use.

Keep this manual in a appropriate place for easy reference at any time.

Guangdong Hinson Technology Co., LTD

Version Declaration

Version	Increase or decrease information
V1.0	Release

Contents

Version Declaration	1
1	3
1 Specifications	4
2 Preparation	5
2.1 Configuration list confirmation form	5
2.2 Configuration tool	5
3 Physical parameters	6
3.1 Product size	6
3.2 Front view and key display	7
3.3 Connector	8
3.4 Input and Output signal wiring	11
3.4.1 Input signal wiring	11
3.4.2 Signal combination	11
3.4.3 Output signal wiring	14
3.4.4 Connection Example	15
3.5 Installation requirements	16
4 Strength and distance	16
5 Function configuration	17
5.1 Device preparation	17
5.2 Connection of sensor and configuration software	17
5.3 Multi-echo setting (for LE-50621FA only)	26
6 Description of sensor data	27
6.1 Sensor coordinate system	27
6.2 Multiple echo technology	27
6.2.1 Filtering environment and minimum distance	27
6.2.2 Effect of object surface on measurement	27
6.3 Ethernet data transmission	28
6.4 Control commands	35
7 RS485-MODBUS protocol	39
7.1 Communication specifications	39
7.2 Master-slave communication timing	39
7.3 Data structure	40
7.4 Register definition	42
7.5 Serial port to send data	43
8 CAN OPEN data protocol	47
8.1 Basic concepts	47
8.2 Communication specifications	47
8.3 Control message	47
8.4 Node online message	48
8.5 Heartbeat message	48
8.6 Process data object (PDO)	49
8.7 Service Data Object (SDO)	51
8.8 EDS file	51
8.9 Index definition	51
8.10 Send data directly	53
9 After-sale information	55

9.1 Warranty period	55
9.2 Warranty scope	55
9.3 Exemption scope	55
9.4 Technical support	55

1 SPECIFICATIONS

Basic characteristics	
Detection distance	0.1m~20m (Reflectivity 10%)
	0.1m~50m (Reflectivity 90%)
	0.1m~50m (Reflector)
Detection angle	360°
Start time	<18s (30Hz)
Sensor parameters	
Light source	Laser diode
Laser class	Class 1 (IEC 60825-1:2014,EN 60825-1:2014) (Do not look directly)
Wavelength	905nm
Pulse time	5ns
Laser scanning frequency	600K
Measurement method	Pulse ranging technology (PRT)
Single point sampling times	1-50 times adjustable
Scanning motor speed	10Hz、15Hz、20Hz、25Hz、30Hz Five kinds of settings
Ambient light limit	Resistant to sunlight (<80000 Lux)
Multiple echo description	LE-50621F:Single echo function
	LE-50621FA:Support multi echo function, support first echo, second echo, last echo, maximum energy
Measurement accuracy	
Absolute accuracy	± 20mm
Measurement accuracy	± 10mm
Angle resolution	Minimum 0.018° , Determined by laser scanning frequency, scanning motor speed, and single point sampling times
Repeat accuracy	<10mm
Measurement resolution	1mm
Electrical specification	
Working voltage	18V~60V
Working current (DC 24V)	< 300mA
Rated power	About 6W
Start time	< 30s
Interface	
Interface	6 NPN inputs, 4 NPN output, through 6 NPN input ports to switch channels (channels 0-63).and 4 NPN output ports to output red, orange, and yellow areas and their fault signals
	RS485-Modbus Output switch value obstacle avoidance data;
	CAN open Output switch value obstacle avoidance data
	Ethernet TCP/UDP output 360° raw measurement data
Display	

Power indicator	Green
Fault status indicator	Red
Fault status indicator	Red, yellow, orange
Output status indicator	24*252 Pixel, red
Environmental conditions	
Ambient temperature	-10℃-50℃, indoor
Ambient humidity	<80%RH
Storage environment temperature	Storage temperature (-20℃-70℃)
Mechanical specifications	
Protecting level	IP65
Connection port	M12-4 female cable, Ethernet port
	M12-6 female cable, power supply and communication port
	M12-12 female cable, IO port
Material	Base, aluminum alloy
	Scan window, PUMA

2 PREPARATION

2.1 CONFIGURATION LIST CONFIRMATION FORM

Configuration list confirmation form	Please confirm whether the product name and product model on the outer label of the product box are consistent with the one you purchased.			
	Please confirm the product name and model number through the external label of the product.			
	Please confirm whether the following items are complete after unpacking, if not, please contact the supplier.			
	Name	Model	Quantity	Description
	LIDAR sensor	LE-50621	1	Sensor
	Cable	HCX4L20BE	1 (must buy)	2m M12-4 female cable, Ethernet output port
Cable	HCX6L20BX	1 (must buy)	2m M12-6 female cable, power port, RS485 port, CAN port	
Cable	HCX12L20BX	1 (Buy on demand)	2m M12-12 female cable, IO port	


2.2 CONFIGURATION TOOL

The following software and hardware are needed for auxiliary configuration.

Software tools	Hinson Software 1.0.0 and above
Power	DC 24V
Tool	PC computer is equipped with RJ45 interface


3 PHYSICAL PARAMETERS

3.1 PRODUCT SIZE

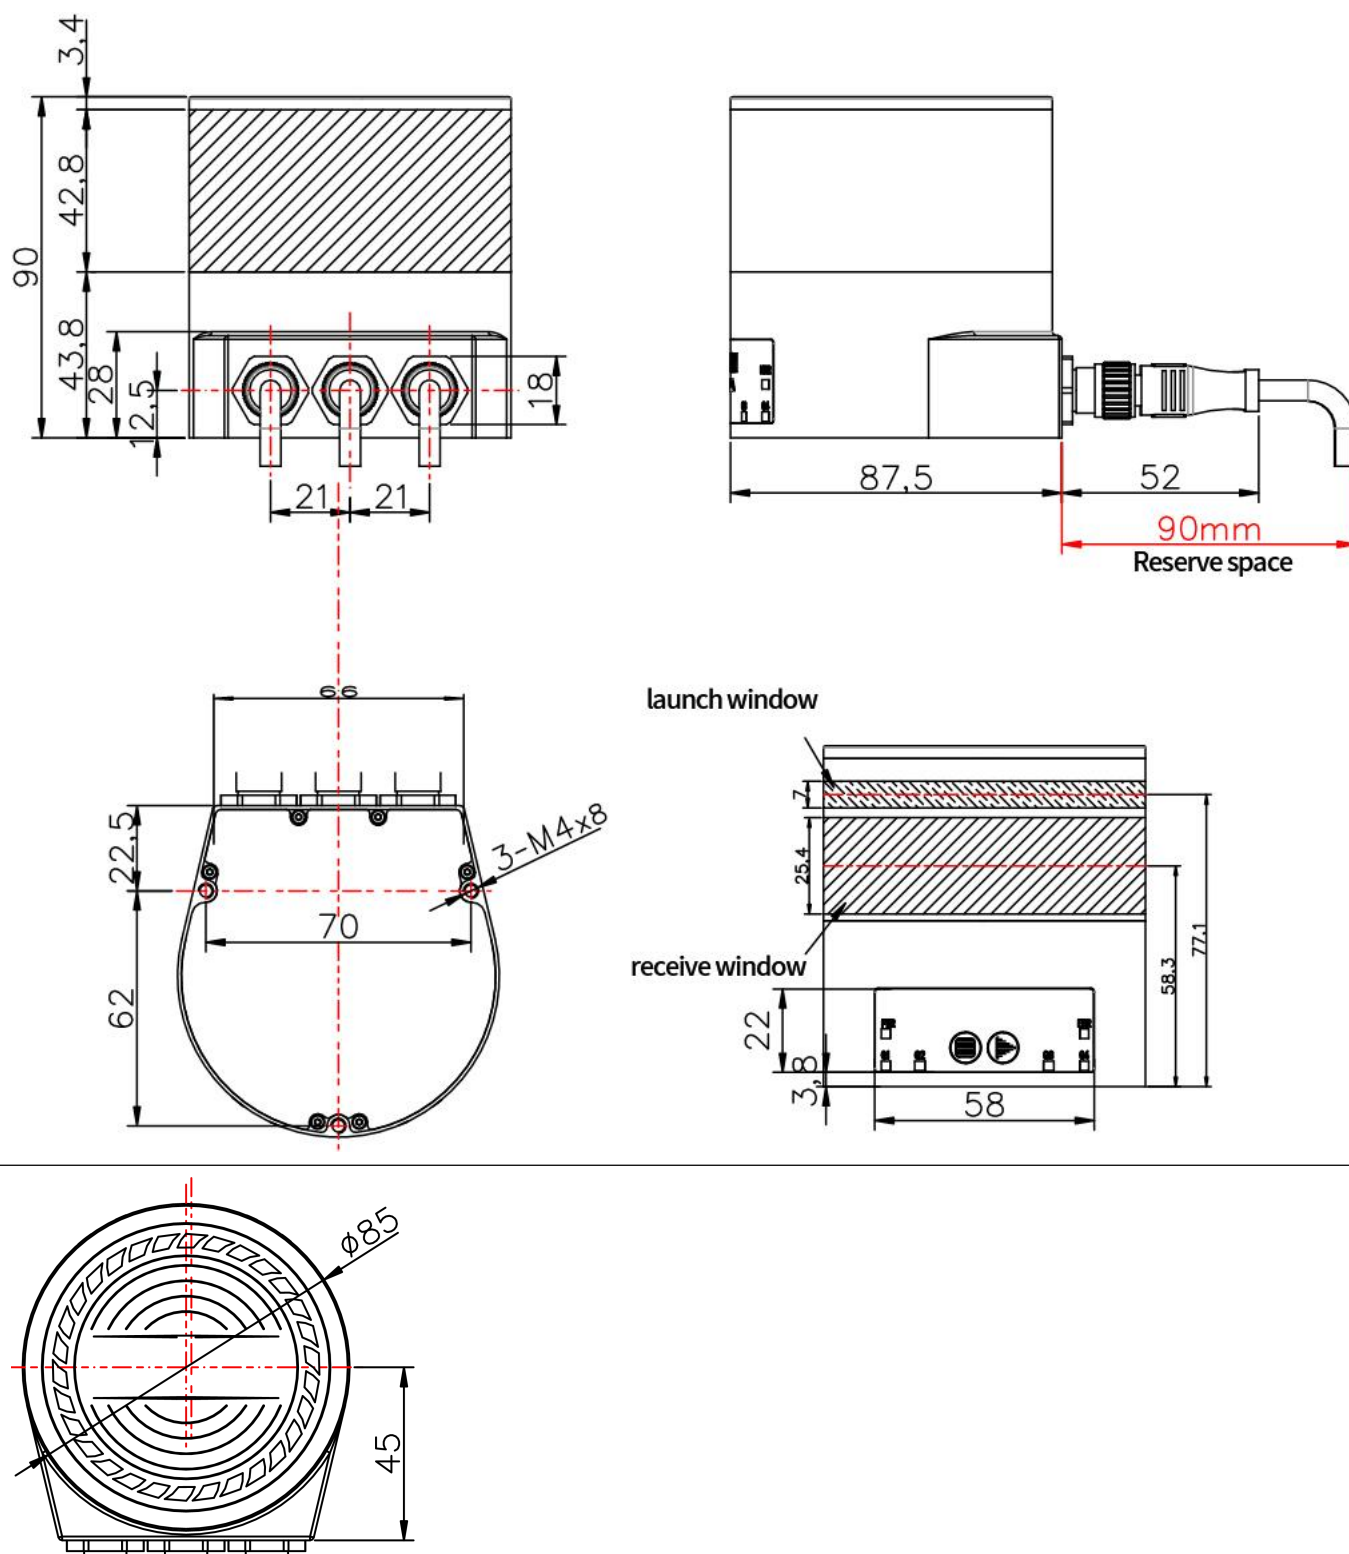


unit: mm


3.2 FRONT VIEW AND KEY DISPLAY

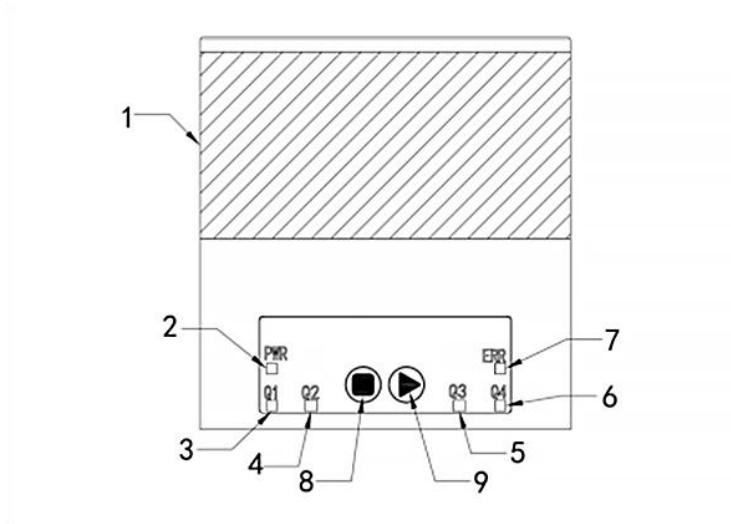


N O.	Sym bol	Function description	Remarks
1	-	Sensor detection window	Be sure to keep the sensor detection window clean
2	PWR	Power indicator	Orange during normal power supply
3	Q1	Protection zone operation status indicator	There are obstacles intruding into the protection zone indicator light is red
4	Q2	Warning zone 2 operation status indicator	Obstacle intrusion warning zone 2 indicator is orange
5	Q3	Warning zone 1 operation status indicator	Obstacle intrusion warning zone 1 indicator is orange
6	Q4	Not defined	Invalid
7	ERR	Fault status indicator	The indicator light is orange when the sensor is faulty
8		Window display content switching	Press this button to switch the display between "scanning range display" and "customized Chinese and English display" Scan range display Chinese and English

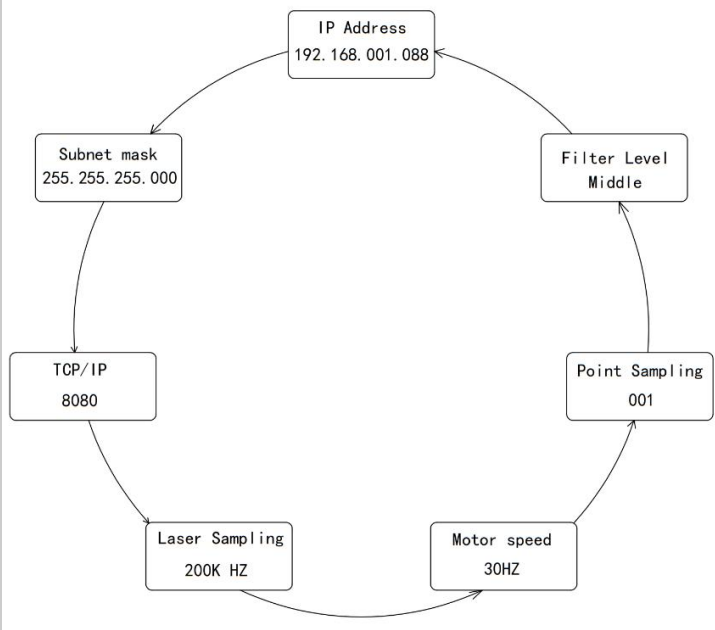9		Window display content switching	Press this button "IP address", "subnet mask", "port number", "laser scanning frequency", "scanning motor speed", "single point sampling times", "noise filtering level" to switch the display sequentially  <pre> graph TD A["IP Address 192.168.001.088"] --> B["Subnet mask 255.255.255.000"] B --> C["TCP/IP 8080"] C --> D["Laser Sampling 200K HZ"] D --> E["Motor speed 30HZ"] E --> F["Point Sampling 001"] F --> G["Filter Level Middle"] G --> A </pre>
---	---	----------------------------------	---

3.3 CONNECTOR

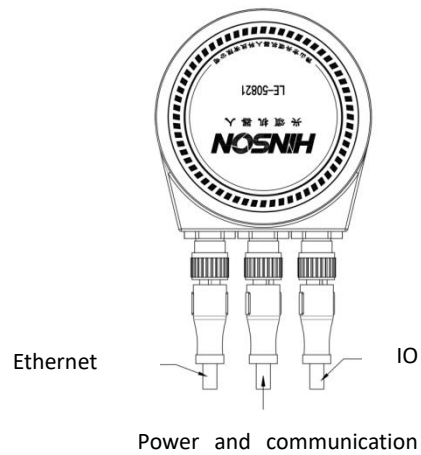


Ethernet port:



NO.	Symbol	Function Description
Pin1	Tx+	Ethernet TX+
Pin3	Tx-	Ethernet TX-
Pin2	Rx+	Ethernet RX+
Pin4	Rx-	Ethernet RX-

Cable model	NO.	Color	Symbol	Function Description	RJ45
HCX4L20BE	Pin1	White&Red	Tx+	Ethernet TX+	1
	Pin3	Red	Tx-	Ethernet TX-	2
	Pin2	White&Green	Rx+	Ethernet RX+	3
	Pin4	Green	Rx-	Ethernet RX-	6


Power and Communication Port:



NO.	Symbol	Function Description
Pin1	Invalid	
Pin2	VCC	Positive power input
Pin3	GND	Negative power input
Pin4	Invalid	
Pin5	Invalid	
Pin6	Invalid	

Cable Model	NO.	Color	Symbol	Function Description
HCX6L20BX	Pin1	White	Invalid	
	Pin2	Brown	VCC	Positive power input
	Pin3	Green	GND	Negative power input
	Pin4	Yellow	Invalid	
	Pin5	Gray	Invalid	
	Pin6	Pink	Invalid	

IO port:

		
NO.	Symbol	Function Description
Pin1	INCOM	Input common terminal
Pin2	IN1	Input port 1
Pin3	IN2	Input port 2
Pin4	IN3	Input port 3
Pin5	IN4	Input port 4
Pin6	IN5	Input port 5
Pin7	IN6	Input port 6
Pin8	OUTCOM	Output common terminal
Pin9	OUT1	Port action when output zone 1 senses an object
Pin10	OUT2	Port action when output zone 2 senses an object
Pin11	OUT3	Port action when output zone 3 senses an object
Pin12	Error OUT	Port action when sensor fails


Cable Model	NO.	Color	Symbol	Function Description
HCX12L20BX	Pin1	White	INCOM	Input common terminal
	Pin2	Brown	IN1	Input port 1
	Pin3	Green	IN2	Input port 2
	Pin4	Yellow	IN3	Input port 3
	Pin5	Gray	IN4	Input port 4
	Pin6	Pink	IN5	Input port 5
	Pin7	Blue	IN6	Input port 6
	Pin8	Red	OUTCOM	Output common terminal
	Pin9	Orange	OUT1	Port action when output zone 1 senses an object
	Pin10	Purple	OUT2	Port action when output zone 2 senses an object
	Pin11	Black	OUT3	Port action when output zone 3 senses an object
	Pin12	Light Purple	Error OUT	Port action when sensor fails

3.4 INPUT AND OUTPUT SIGNAL WIRING


3.4.1 Input signal wiring

The input is an open collector (NPN) signal, using optocoupler isolation input.

Use external power supply: COM+ input DC24V $\pm$ 20%, more than 100mA;

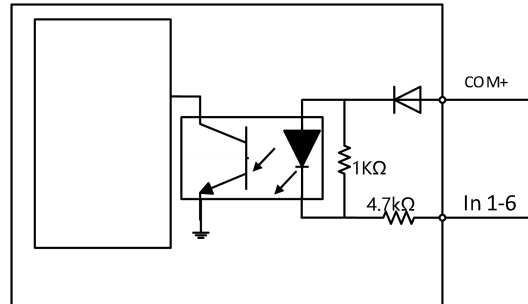

The sensor has 64 channels, and the input signal combination is switched to the specified channel number through 6 IO ports. The detection range of the channel needs to be set in advance through the configuration software. The external device selects and switches the area through the input signal.

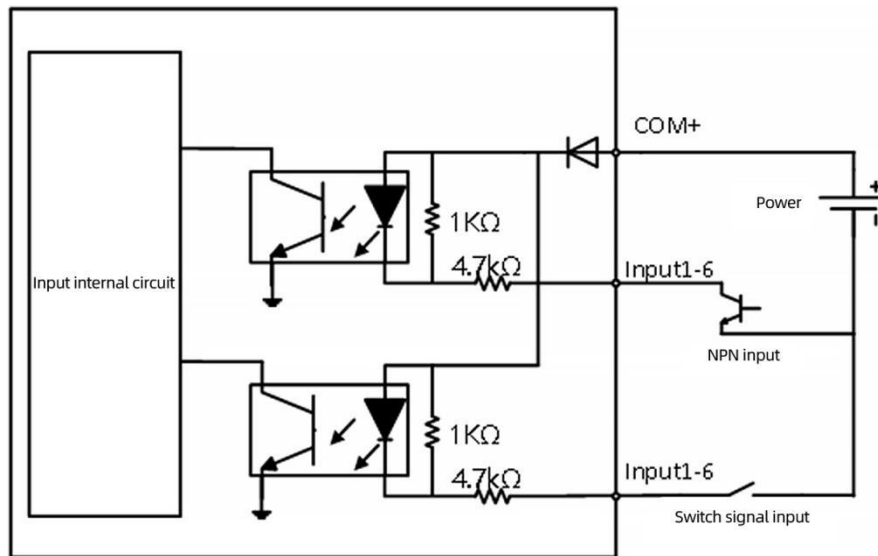


3.4.2 Signal combination

The sensor provides 6 input port combination signals.

ON: input has signal;

OFF: input has no signal or is open circuit;

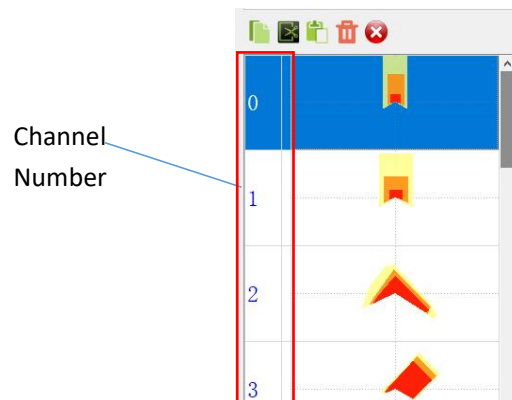

Channel Number	In6	In5	In4	In3	In2	In1
----------------	-----	-----	-----	-----	-----	-----

Channel Number	In6	In5	In4	In3	In2	In1
63	OFF	OFF	OFF	OFF	OFF	OFF
62	OFF	OFF	OFF	OFF	OFF	ON
61	OFF	OFF	OFF	OFF	ON	OFF
60	OFF	OFF	OFF	OFF	ON	ON
59	OFF	OFF	OFF	ON	OFF	OFF
58	OFF	OFF	OFF	ON	OFF	ON
57	OFF	OFF	OFF	ON	ON	OFF
56	OFF	OFF	OFF	ON	ON	ON
55	OFF	OFF	ON	OFF	OFF	OFF
54	OFF	OFF	ON	OFF	OFF	ON
53	OFF	OFF	ON	OFF	ON	OFF
52	OFF	OFF	ON	OFF	ON	ON
51	OFF	OFF	ON	ON	OFF	OFF
50	OFF	OFF	ON	ON	OFF	ON
49	OFF	OFF	ON	ON	ON	OFF
48	OFF	OFF	ON	ON	ON	ON
47	OFF	ON	OFF	OFF	OFF	OFF
46	OFF	ON	OFF	OFF	OFF	ON
45	OFF	ON	OFF	OFF	ON	OFF
44	OFF	ON	OFF	OFF	ON	ON
43	OFF	ON	OFF	ON	OFF	OFF
42	OFF	ON	OFF	ON	OFF	ON
41	OFF	ON	OFF	ON	ON	OFF
40	OFF	ON	OFF	ON	ON	ON
39	OFF	ON	ON	OFF	OFF	OFF
38	OFF	ON	ON	OFF	OFF	ON
37	OFF	ON	ON	OFF	ON	OFF
36	OFF	ON	ON	OFF	ON	ON
35	OFF	ON	ON	ON	OFF	OFF
34	OFF	ON	ON	ON	OFF	ON
33	OFF	ON	ON	ON	ON	OFF
32	OFF	ON	ON	ON	ON	ON
31	ON	OFF	OFF	OFF	OFF	OFF
30	ON	OFF	OFF	OFF	OFF	ON
29	ON	OFF	OFF	OFF	ON	OFF
28	ON	OFF	OFF	OFF	ON	ON
27	ON	OFF	OFF	ON	OFF	OFF
26	ON	OFF	OFF	ON	OFF	ON
25	ON	OFF	OFF	ON	ON	OFF
24	ON	OFF	OFF	ON	ON	ON
23	ON	OFF	ON	OFF	OFF	OFF
22	ON	OFF	ON	OFF	OFF	ON
21	ON	OFF	ON	OFF	ON	OFF
20	ON	OFF	ON	OFF	ON	ON


Channel Number	In6	In5	In4	In3	In2	In1
19	ON	OFF	ON	ON	OFF	OFF
18	ON	OFF	ON	ON	OFF	ON
17	ON	OFF	ON	ON	ON	OFF
16	ON	OFF	ON	ON	ON	ON
15	ON	ON	OFF	OFF	OFF	OFF
14	ON	ON	OFF	OFF	OFF	ON
13	ON	ON	OFF	OFF	ON	OFF
12	ON	ON	OFF	OFF	ON	ON
11	ON	ON	OFF	ON	OFF	OFF
10	ON	ON	OFF	ON	OFF	ON
9	ON	ON	OFF	ON	ON	OFF
8	ON	ON	OFF	ON	ON	ON
7	ON	ON	ON	OFF	OFF	OFF
6	ON	ON	ON	OFF	OFF	ON
5	ON	ON	ON	OFF	ON	OFF
4	ON	ON	ON	OFF	ON	ON
3	ON	ON	ON	ON	OFF	OFF
2	ON	ON	ON	ON	OFF	ON
1	ON	ON	ON	ON	ON	OFF
0	ON	ON	ON	ON	ON	ON

NOTE

If all 64 channels are not needed, the input signal can be determined based on the number of channels required;

Switching time

After the sensor receives the channel switching signal, there is a switching delay due to the influence of the scanning cycle. The switching delay is shown in the figure below.

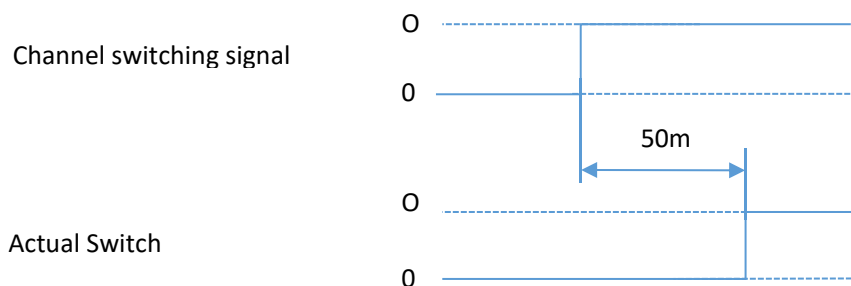**NOTE**


When switching to a channel without graphics, the sensor will maintain the previous monitoring of the graphics channel status. If the graphics channel is empty, the sensor will not detect

3.4.3 OUTPUT SIGNAL WIRING


Output signal usage function

Port	Function	Output logic
OUT1	Used for far-end obstacle warning and deceleration;	Default: Normally closed, can be changed to normally open through configuration software;
OUT2	Used for normal obstacle detection and normal stop;	Default: Normally closed, can be changed to normally open through configuration software;
OUT3	Used for near-end emergency stop;	Default: Normally closed, can be changed to normally open through configuration software;
ERR	Used for sensor fault status output;	Default: Normally open, cannot be changed;


The output is an open collector (NPN) signal, using optocoupler isolation output. When there is a signal, the voltage is 0V-, and the maximum load capacity of the output port is 100mA.

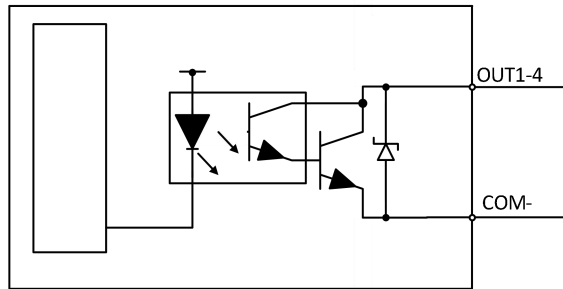

The output ports are all NPN outputs. Please refer to the following figure for the output schematic:

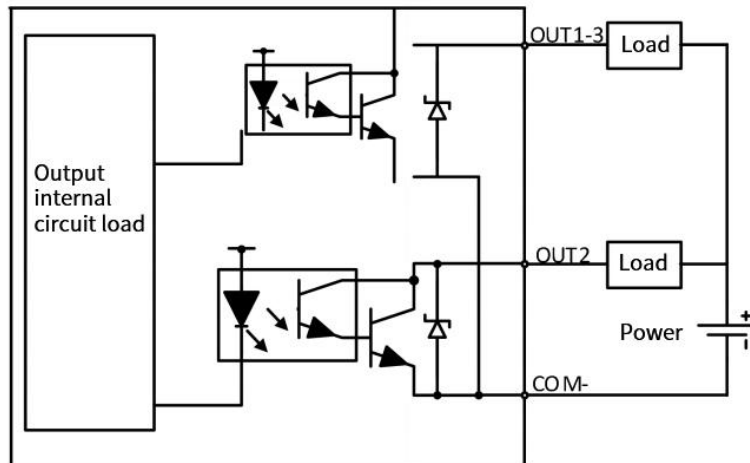

The sensor output ports correspond to the graphics drawn in the configuration software.

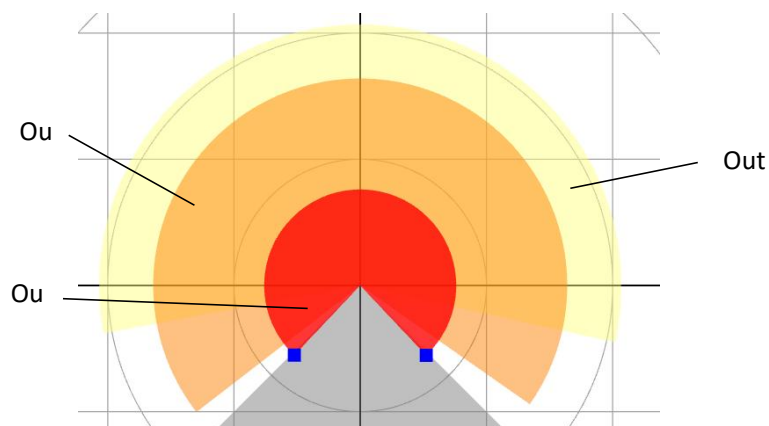


NOTE There will be detection output only when there is a drawing graphic for the corresponding output

3.4.4 CONNECTION EXAMPLE

Based on the wiring when all 64 channels are fully used and all outputs are fully used.

NPN signal wiring

The figure below shows that the host computer outputs and receives signals through NPN transistors.

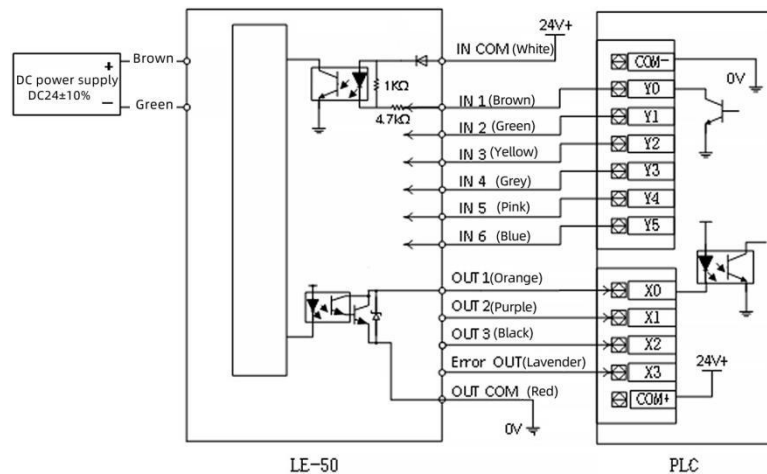

X0-3 is the signal input port of PLC;


Y0-Y5 is the signal output port of PLC;

IN1-IN6 input current is greater than 10mA;

Out1-Out4 output current is less than 100mA;

NOTE The input and output ports cannot be short-circuited or connected to a load exceeding the specified current, otherwise the sensor will be damaged.


3.5 INSTALLATION REQUIREMENTS

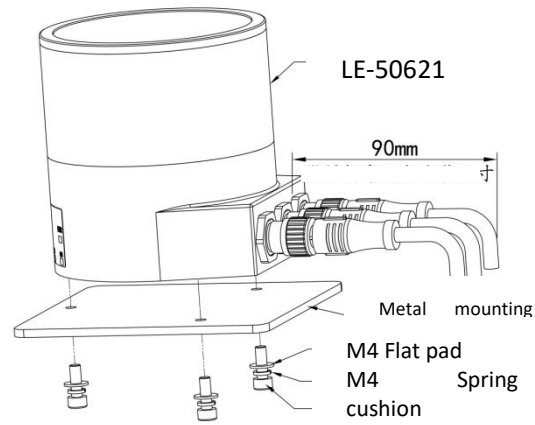

- Remark: 1) Bolt length can be adjusted
 2) The metal mounting plate is to dissipate heat for the sensor

4 STRENGTH AND DISTANCE

The following tables are the correspondence tables of three types of reflectivity intensity and distance

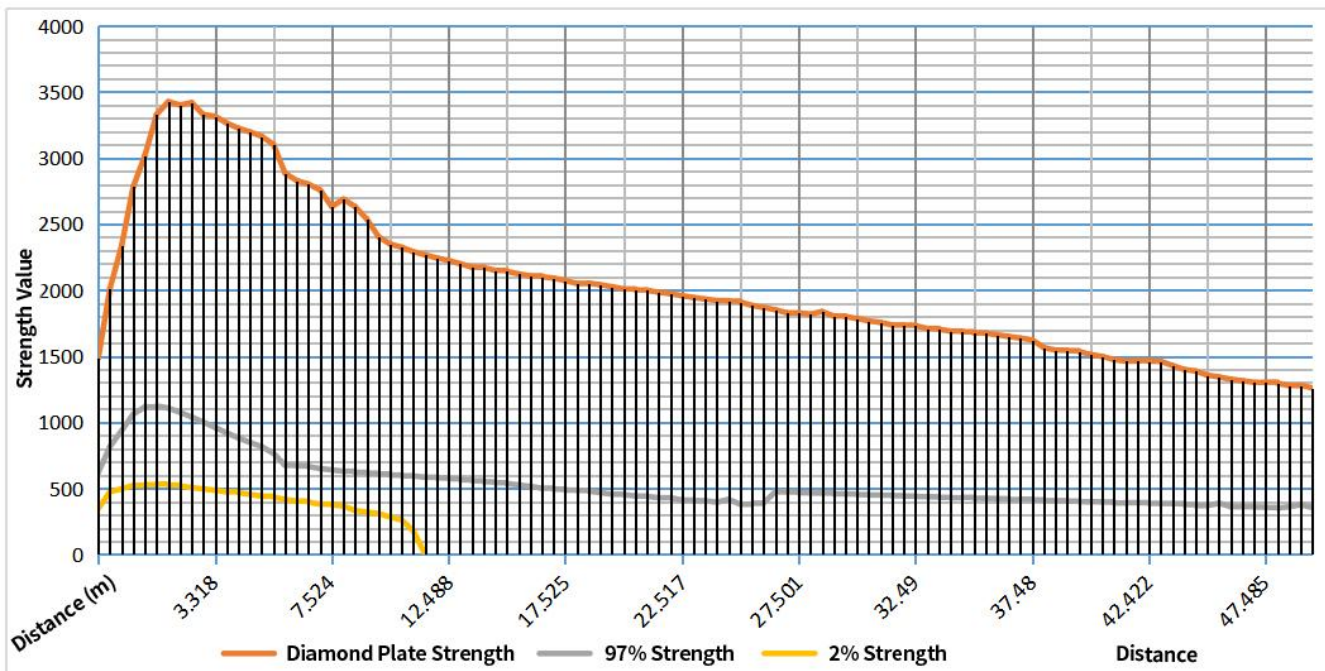


5 FUNCTION CONFIGURATION

5.1 DEVICE PREPARATION

Power and communication	Brand	Hinson
	Model	HCX6L20BX
Ethernet port cable	Brand	Hinson
	Model	HCX4L20BE
DC power supply	Voltage	DC18V-DC60V
	Current	1A above
PC	System	Windows XP above
	Port	Equipped with RJ45 interface or equipped with USB to RJ45 network cable interface
	Resolution	1280*720 above

5.2 CONNECTION OF SENSOR AND CONFIGURATION SOFTWARE


Connection:

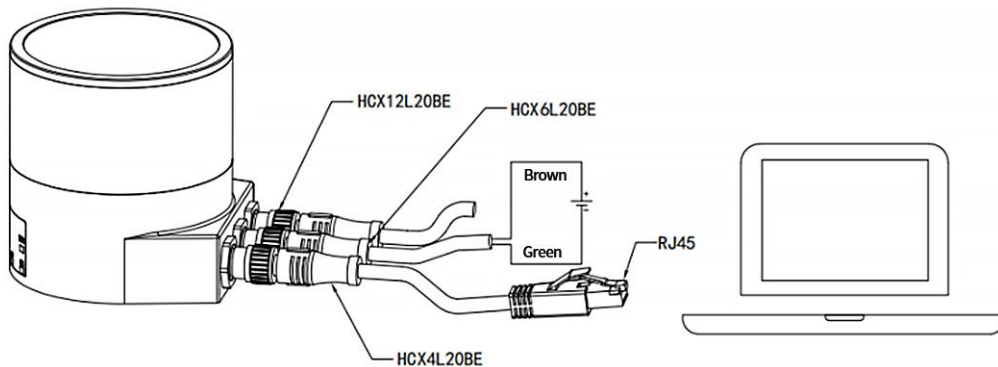


Configure computer: Open "Control Panel"->"Network and Internet"->"Network Connections"->"Ethernet 5"



Right-click "Ethernet 5"->"Internet Protocol Version 4 (TCP/IPv4)"->"Properties"

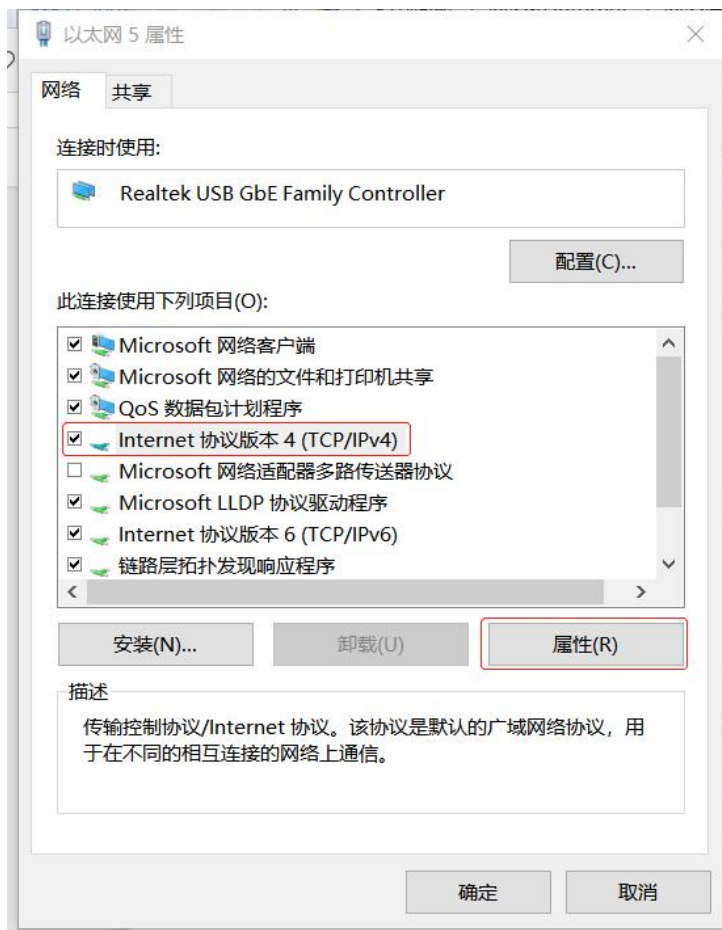


Fill in the computer's IP address 192.168.1.10, subnet mask 255.255.255.0, and click the OK button. It should be noted that the last digit of the computer's IP address 192.168.1.10 ranges from 1-254, and the sensor's IP address defaults to 192.168.1.88. The last digit here must be different from the last digit of the sensor's IP address. Special attention should be paid. The first 3 digits of the computer's IP address and the sensor's IP address must be the same and the last digit must be different.

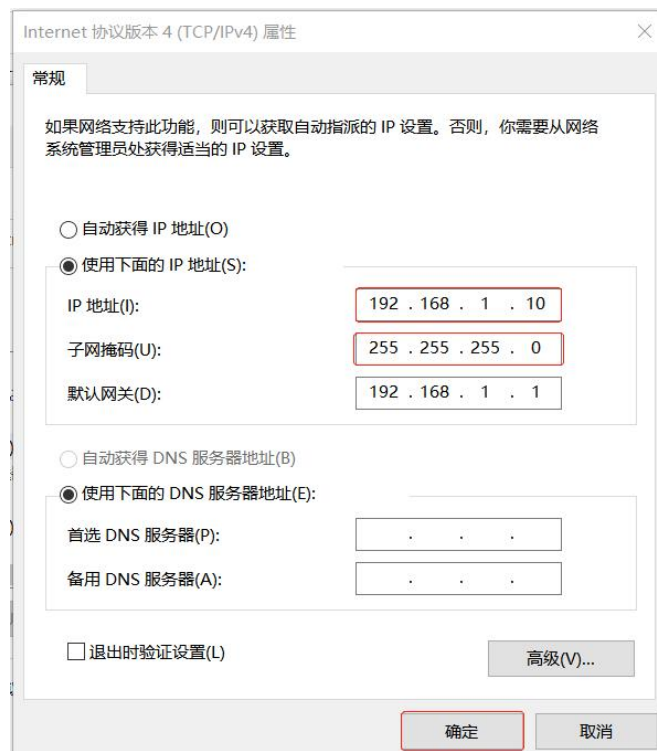


Open the configuration software:

Unzip the  Hinson.exe configuration software, double click  After entering the "Device List" interface, click to enter the following interface:

Follow the steps 1, 2, 3, and 4 below to connect the sensor and configuration software.

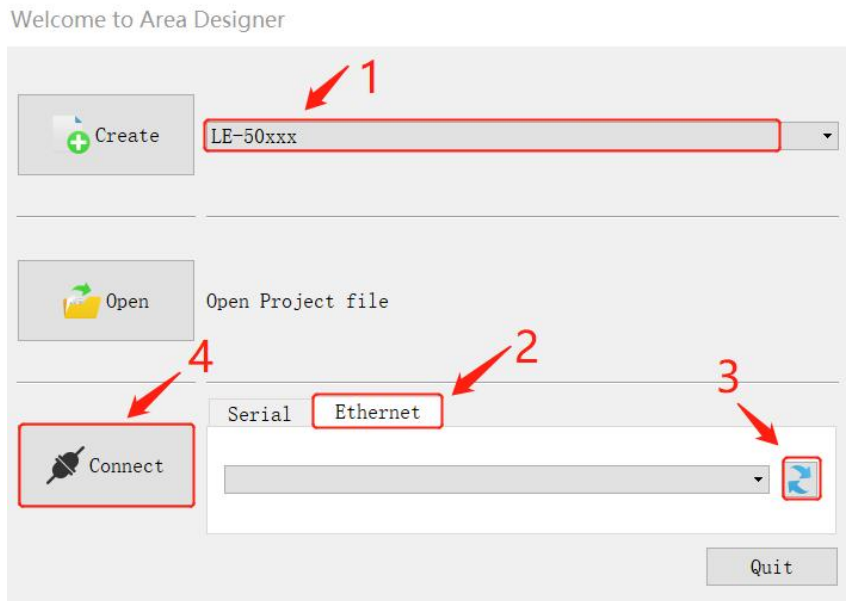

After the sensor is connected to the configuration software, the following interface will be displayed:

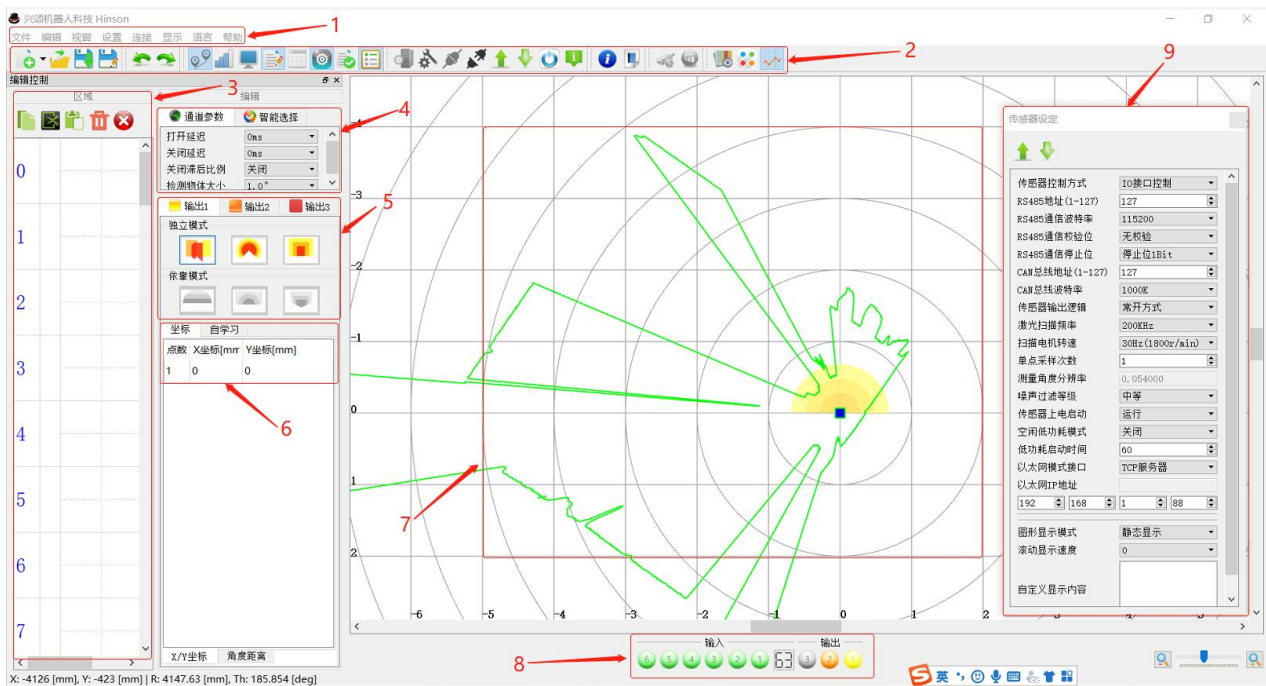

Part 1: Menu

Menu A	Menu B	Menu C	Corresponding icon	Remarks
File	New build	-		New build file

	Open file	-		Open the created file
	Save file	-		Save the edited file
	Save as	-		Save the edited file as
	Exit	-		Exit the current configuration software
Edit	Revoke	-		Undo the previous step
	Redo	-		Resume the previous step
	Copy	-		Copy the detection pattern of a detection channel
	Cut	-		Cut the detection pattern of a detection channel
	Paste	-		Paste the detection pattern to another channel
	Delete	-		Delete the currently selected detection channel graphics
	Delete all	-		Delete all the detection channel graphics
	Setting	-		-
Windows	Windows	Edit		Click the icon to display the edit function box
		Monitor		Click the icon to display the monitoring status
		Sensor setting		Click the icon to display the sensor parameter setting function box
		Input and Output simulation		Click the icon to display the sensor input and output simulation function box
		Self-check status		Click the icon to display the sensor self-check status
	Distance	-		Click to close or display the scan profile within the current 360° range of the sensor
	Strength	-		Click to close or display the reflective intensity of obstacles
	Datasheet	-		The configuration software does not support the output of distance data of all current detection points, this item is not available
Setting	Serial port	-		The sensor does not support serial port connection configuration software, this item is not available


	Ethernet	-		Click to select the Ethernet connection configuration software
	Serial port settings	-		The sensor does not support serial port connection configuration software, this item is not available
	Ethernet settings	-		Click to view the current sensor Ethernet address
Connect	Interface	Serial port		The sensor does not support serial port connection configuration software, this item is not available
		Ethernet		
	Connect the device	-		Click Connect Sensor and Configuration Software
	Disconnect device	-		Click to disconnect the sensor and configuration software
	Upload data	-		Click to upload the set detection channel graphics and various parameters of the sensor
	Download data	-		Click to download the detection channel graphics and various parameters
	Restart device	-		After setting the detection channel graph and its various parameters, click this icon to restart the sensor, and the parameters can take effect
	Sensor information	-		-
Display	Graphic display	-		Click the icon to display the 360° scan profile of the sensor as a flat graphic
	Point cloud display	-		Click the icon to display the 360° scan profile of the sensor as a point cloud
	Line display	-		Click the icon to display the 360° scan outline of the sensor as a line
Language	Chinese	-		Click the icon to display in Chinese
	English	-		Click the icon to display in English
Help	About	-		Click the icon to display version information
	Guide	-		-

Part 2: Shortcut icons

All shortcut icons are explained in the menu bar of Part 1


Part3: Graphical Editing of Detection Channels

The sensor supports 0-63 detection channels, each detection channel supports 3 detection area detection graphics output, the sensor can select the channel through IO, RS485-Modbus, CANOpen, and output whether there are obstacles in the 3 detection areas of the channel.


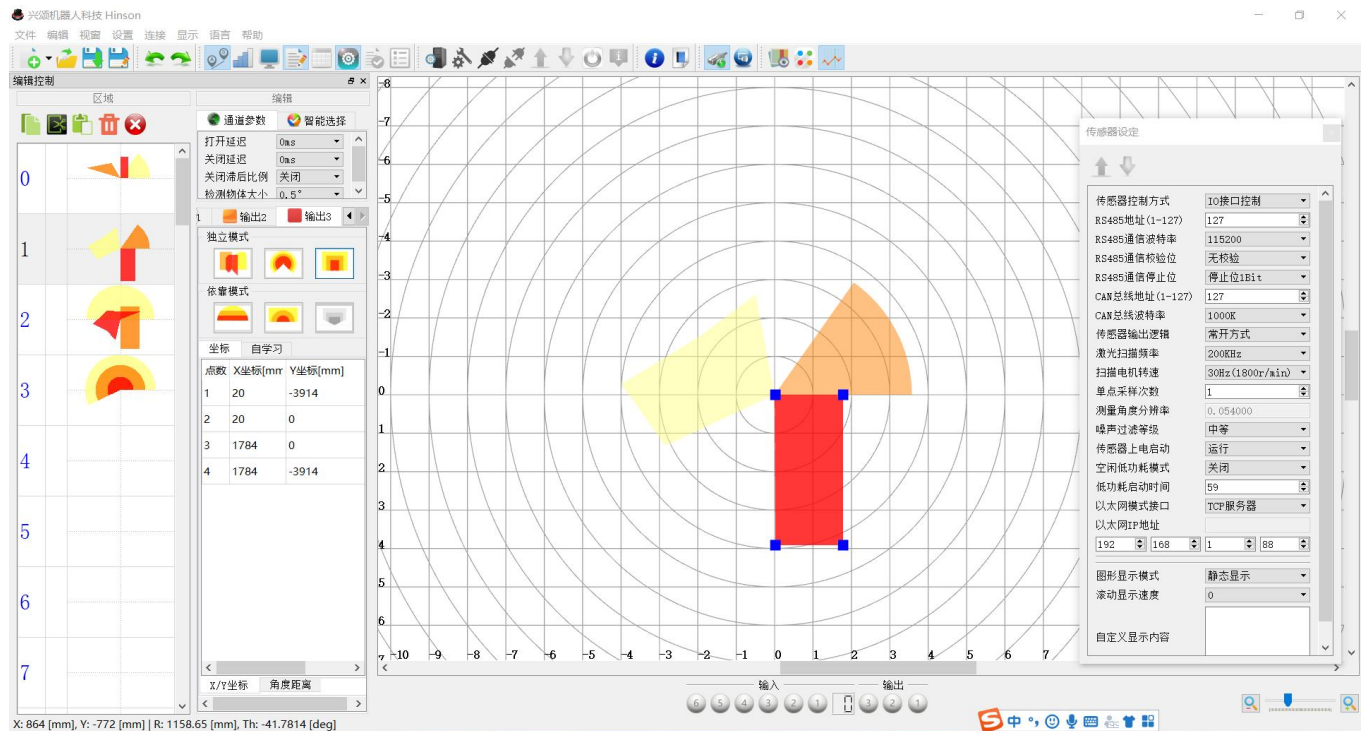


Part 4: Channel detection graphics output 1, output 2, output 3 editing mode.

Independent mode: In the independent mode, irregular shapes, sectors and rectangles can be set separately, among which irregular shapes are composed of up to 100 points.

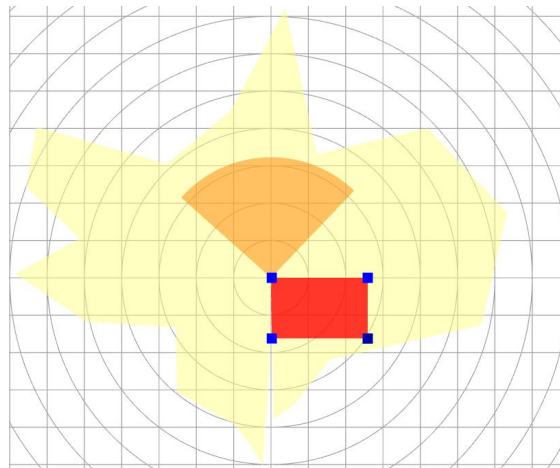


Dependent mode: After setting the graphics of output 1, you can select the dependent mode to copy the graphics of output 1 in different proportions.

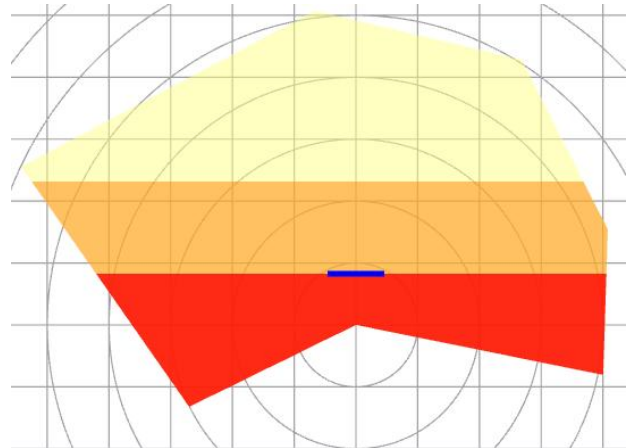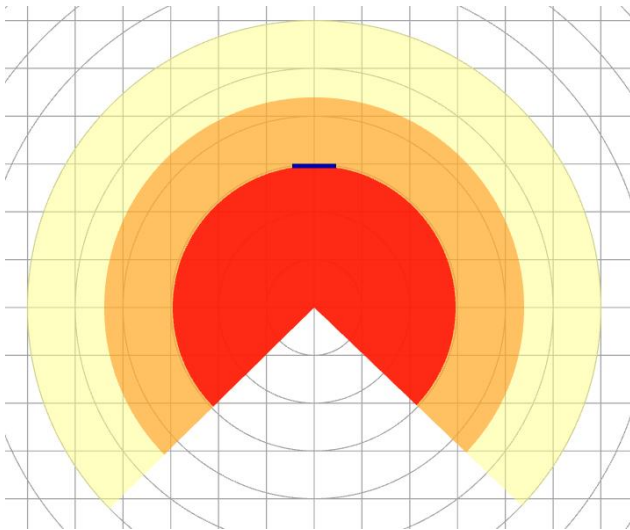


Part 5: Coordinates and their angle values

Coordinates (X, Y) of each point of irregular graph in independent mode:

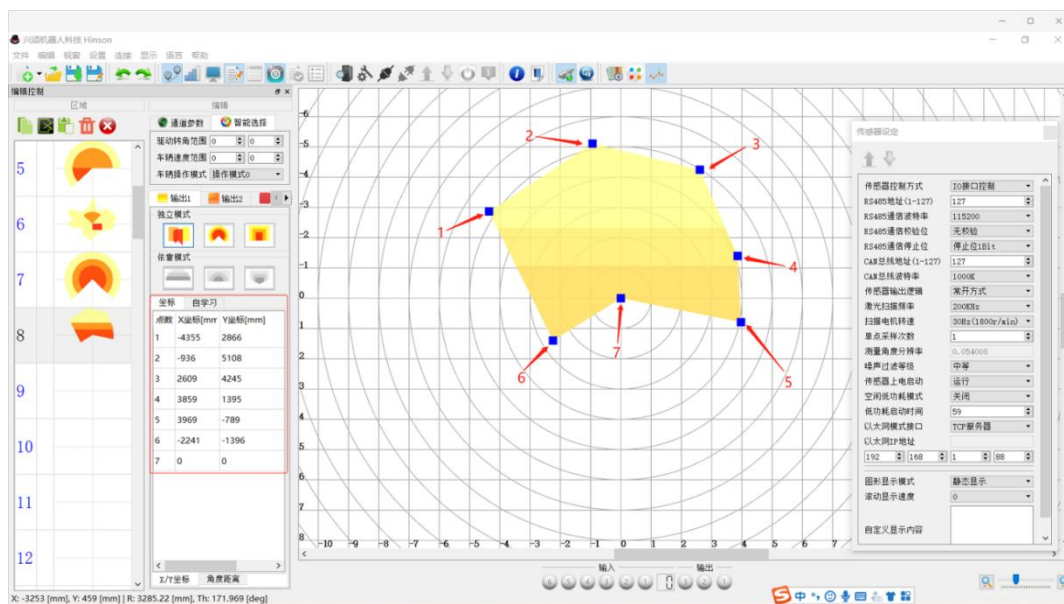


Remarks: The 7th point is the origin of coordinates

The distance and angle between each point of the irregular shape and the origin of the coordinate in the independent Mode:

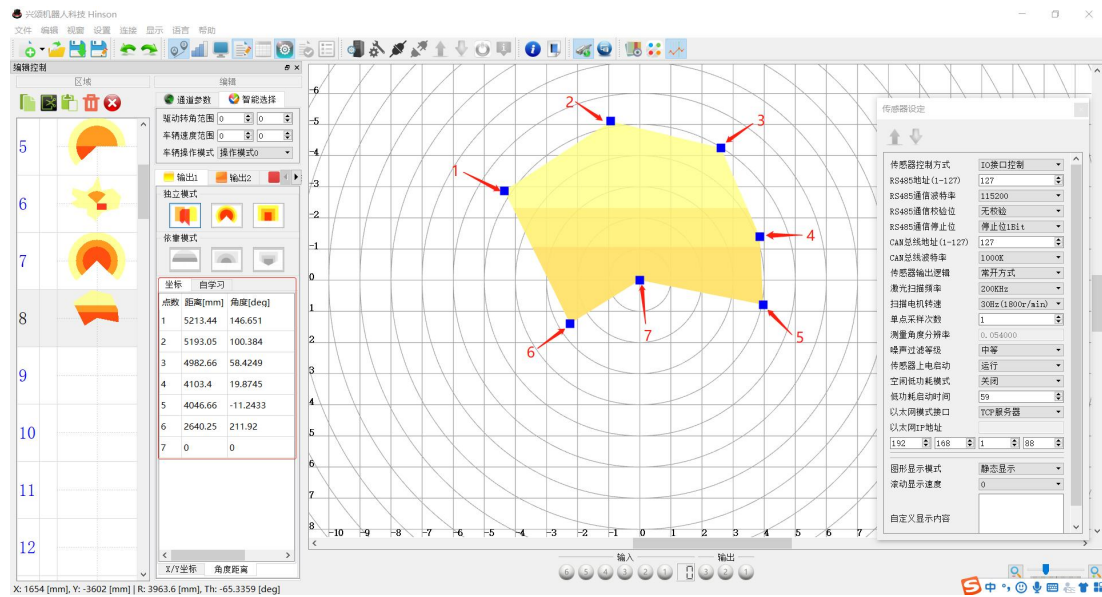

Remarks: The 7th point is the origin of coordinates

Part 6: Scanning profile, reflection intensity, detection channel graphics Display area:

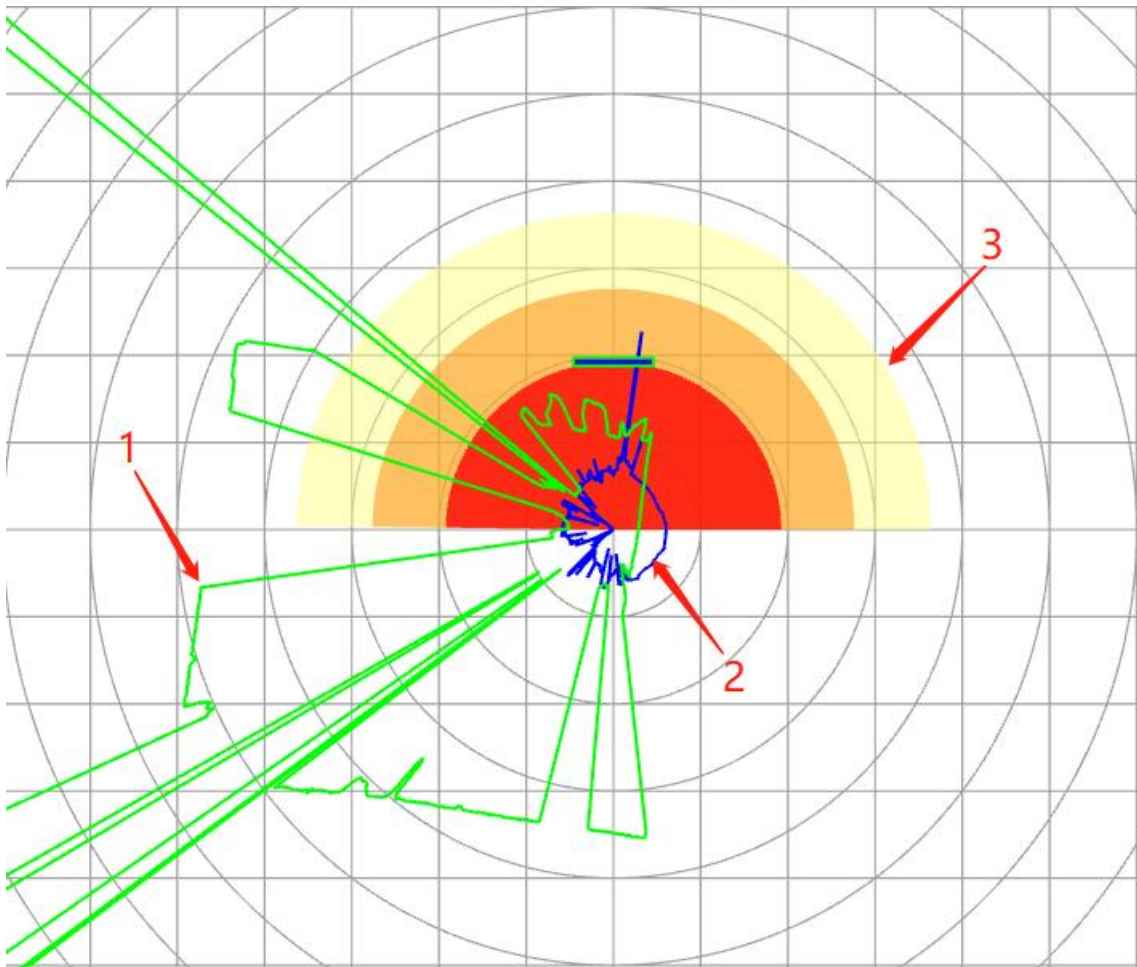

Remarks: 1 the green line shows the scanning outline, 2 the blue line shows the reflection intensity, and 3 is the set detection pattern.

Part 7: 6 groups of switch input selection detection 0-63 channels, 3 groups of switch output respectively 1, 2, and 3 status signals.


Part 8: Sensor Settings

Parameter list	Parameter value	Remark
Sensor control method	IO interface control	When selecting sensor channel for input, select one of IO, Modbus, and Canopen. Only one of them can be valid at the same time, and IO is always valid when outputting.
	Modbus control	When the sensor channel is selected for input, select one of IO, Modbus, and Canopen. Only one of them can be valid at the same time. IO is always valid when outputting. When Modbus communication control is selected, Modbus output is valid.
	Canopen control	When the sensor channel is selected for input, one of IO, Modbus, and Canopen can be selected. Only one of them can be valid at the same time. IO is always valid during output. When Canopen communication control is selected, Canopen output is valid.
RS485 address (1-127)	1-127	RS485 communication address 1-127 can be set
RS485 communication baud rate	9600bps	RS485 Communication baud rate setting
	19200bps	
	38400bps	
	57600bps	
	115200bps	
RS485 check bit	No verification	RS485 Check code setting
	Odd parity	
	Even parity	
RS485 communication stop bit	Stop bit 1Bit	RS485 stop bit setting
	Stop bit 1.5Bit	
	Stop bit 2Bit	
CANbus address (1-127)	1-127	CANbus address 1-127 Can be set
CANbus baud rate	125K	CANbus baud rate
	250K	
	500K	
	1000K	
Sensor output logic	Normally open	Sensor output normally open, normally closed setting
	Normally close	
Laser scanning frequency	50KHZ	Laser scanning frequency setting
	100KHZ	
	150KHZ	
	200KHZ	
Scanning motor speed	10HZ(600r/min)	Scanning motor speed setting
	15HZ(900r/min)	
	20HZ(1200r/min)	
	25HZ(1500r/min)	
	30HZ(1800r/min)	
Single point sampling	1-50	Single point sampling times 1-50 times setting

times		
Measurement angle resolution	—	The measurement angle resolution is determined by "laser scanning frequency" and "scanning motor speed" , "Single point sampling times" 3 parameters


Noise filtering level	Close	Noise filtering level setting, generally the default is simple
	Simple	
	Medium	
	Strict	
Sensor power on and start	Dormant	Set the power-on state of the sensor
	Run	
Idle low power mode	Close	Turn off or turn on low power mode
	Open	
Low power start-up time	1-3600	
Ethernet mode interface	TCP server	TCP server is selected by default
	UDP mode	
Ethernet IP address		Sensor IP address setting
Graphic display	Static	Can dynamically or statically display customize content in Chinese and English
	dynamic	
Scroll display speed	0-3	Dynamic display speed
Customize display content		The Chinese and English can be customized displayed in the sensor window

5.3 MULTI-ECHO SETTING (FOR LE-50621FA ONLY)

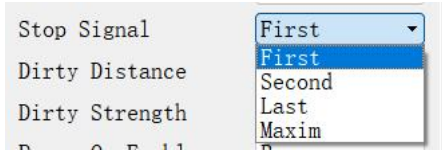	
Frist	Normal mode, no filtering function
Second	Select the second echo, with filtering function (recommended option for echo function)
Last	Select the last echo, with filtering function
Maxim	Receive echo with maximum energy
Note: When there are multiple lasers, use the multiple echo function and select delete in the crosstalk filter mode, and a small part of the point cloud will disappear on the image. Do not use the above functions at the same time.	

6 DESCRIPTION OF SENSOR DATA

6.1 SENSOR COORDINATE SYSTEM

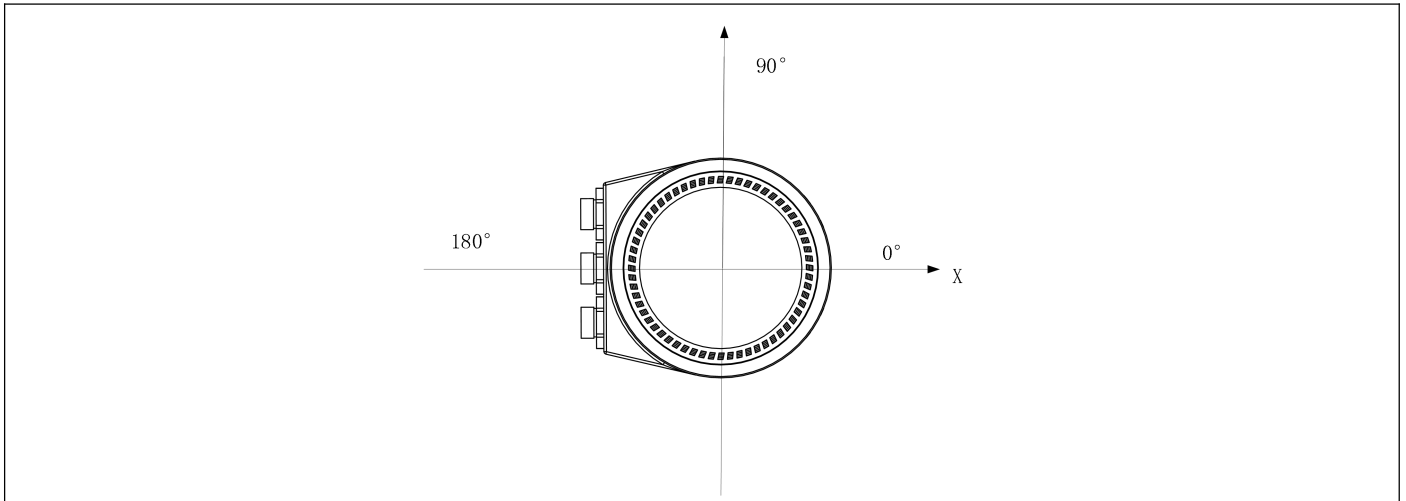


6.2 MULTIPLE ECHO TECHNOLOGY

6.2.1 Filtering environment and minimum distance

The multi-echo technology detects multiple echo signals per measuring beam. This allows echoes caused by rain or fog, complex structures, etc., in the middle of the transmission beam cycle to be identified and filtered out if necessary.


In order to be able to display the echoes as individual measured values, there must be a minimum distance of about 2.5 m between two objects.

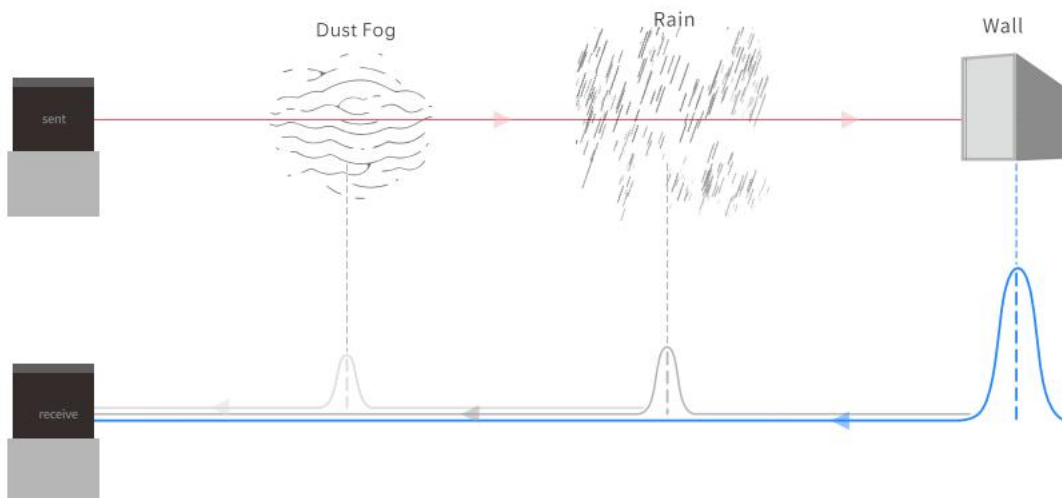

6.2.2 Effect of object surface on measurement

- Smooth reflective surface

Cannot detect smooth reflective surfaces, but can detect objects illuminated by the reflected light from smooth reflective surfaces




Smooth reflective surface

● **Detect small objects or no objects**

If the object to be detected is a small object smaller than the beam diameter, it is possible that

- ① the small object surface is not reflective enough and there is no background object, so it cannot be detected;
- ② the small object is not reflective enough, but the background object is reflective enough, so the detection is wrong;
- ③ the small object and the background object are both reflective enough, so the measurement value is distorted;

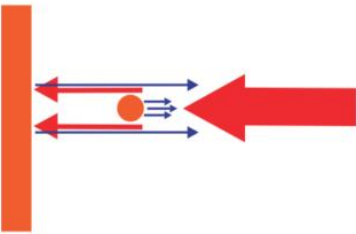

The object is smaller than the laser beam diameter

6.3 ETHERNET DATA TRANSMISSION


◆ Parameter setting

Open the configuration software, enter the sensor (server side) setting interface, and set the following 5 parameters.


Parameter name	Parameter value	Defaults
Ethernet mode	TCP Server	TCP Server
	UDP Mode	
Ethernet IP address	IP address: 192.0.0.1 to 223.255.255.254 Subnet mask: 255.255.255.0 (fixed) Port number: 8080 (fixed)	192.168.1.88
Laser scanning frequency	50KHZ、100KHZ、150KHZ、200KHZ	200KHZ
Scanning motor speed	10HZ、15HZ、20HZ、25HZ、30HZ	10HZ
Single point	1-50 can be set	2

Sensor Setting	
Control Mode	IO Interface
RS485 ID(1-127)	127
RS485 BaudRate	9600
RS485 Verify	None
RS485 StopBit	Stop 1Bit
CAN ID(1-127)	127
CAN BaudRate	125K
Output Logic	Active High
Laser Scan Ferq	200KHz
Scan Motor Speed	10Hz (600r/min)
Scan Filter Number	1
Angle Result	0.018000
Scan Filter Level	Close
Power On Enable	Run
Sleep Function	Close
Sleep Time	60
Ether Mode	TCP Server
Ether IP Address	192 168 1 88
Led Disp Mode	Static
Graphics Speed	0
Display Content	Hinson Robot

After the client initiates a request and establishes a connection, data transmission starts, and the transmission method is as follows:

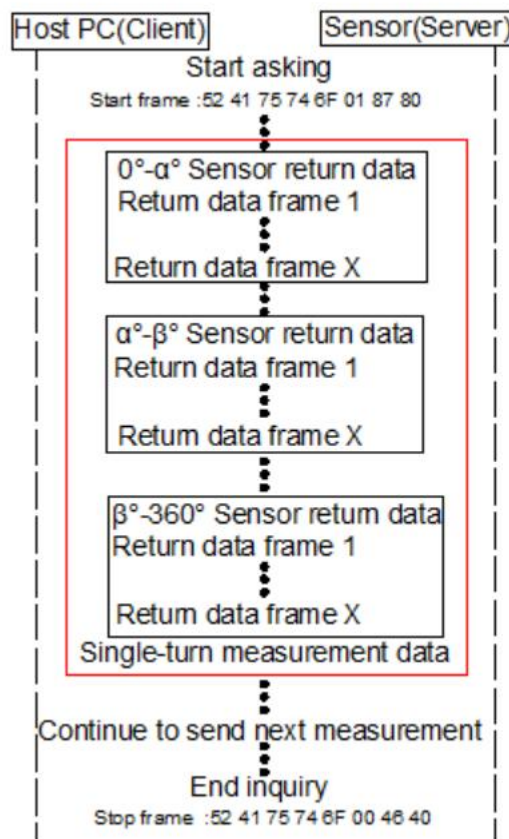

The host computer (client) sends a "start data frame" to the sensor (server). The sensor completes the measurement in 15 times according to 360° , and outputs data after completing a measurement every 24° . The data is sent in multiple data frames within the measured 24° .

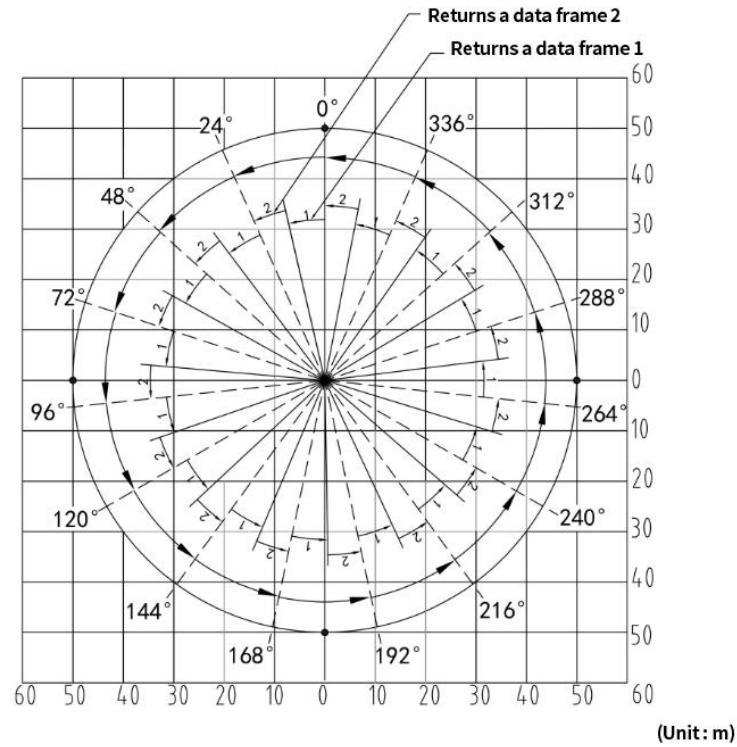

Calculation of measurement angle resolution:

$$\text{Actual angular resolution} = \frac{24^\circ}{\text{Total measurement points from the start angle to the end angle}}$$

Calculation of the total number of measurement points:

Total measurement points per lap

$$= \text{Total measurement points from the start angle to the end angle} \times 15$$

◆ Start data frame (Hex)

Data structure

Start code	Control bit	Check bit
5Byte	1Byte	2Byte

Start code: The fixed data is 0x52 0x41 0x75 0x74 0x6F

Control bit: 0x01 The sensor starts to send data automatically

0x00 The sensor stop send data

Check bit: 0x87 0x80 Low bit in front, high bit in back

Check digit calculated using Modbus-CRC16 calculation method.

◆ Measurement data frame (Hex)

Data structure:

Data frame header	Measurement data
16Byte	Length is not fixed

Data frame header format (Hex) :

Identifier	1Byte
	1Byte
	1Byte
	1Byte
Starting angle	1Byte (High priority)
	1Byte (Low behind)
End angle	1Byte (High priority)
	1Byte (Low behind)
The total number of measurement points in the current data frame	1Byte (High priority)
	1Byte (Low behind)
The sequence number of the last detection point of the current data frame	1Byte (High priority)
	1Byte (Low behind)
The total number of measurement points from the start angle to the end angle	1Byte (High priority)
	1Byte (Low behind)
Time stamp	1Byte (High priority)
	1Byte (Low behind)
	1Byte
	1Byte
	1Byte
Starting angle	1Byte (High priority)
	1Byte (Low behind)
End angle	1Byte (High priority)
	1Byte (Low behind)
The total number of measurement points in the current data frame	1Byte (High priority)
	1Byte (Low behind)
The sequence number of the last detection point of the current data frame	1Byte (High priority)
	1Byte (Low behind)
The total number of measurement points from the start angle to the end angle	1Byte (High priority)
	1Byte (Low behind)
Time stamp	1Byte (High priority)
	1Byte (Low behind)

1. Identifier (4Byte) : 0x48 0x49 0x53 0x4e

2. Starting angle (2Byte): the starting angle of the currently returned measurement data

3. End angle (2Byte): the end angle of the currently returned measurement data

4. The total number of measurement points in the current data frame (2Byte):

Due to different angle resolutions, the total number of measurement points from the start angle to the end angle will be different. The measurement data will be returned in several data frames from the start angle to the end angle. The "Total number of measurement points in the current data frame" is the current The data frame returns the total number of measurement points.

5. The sequence number of the last detection point of the current data frame (2Byte):

For example: the total number of measurement points from the start angle to the end angle is 667, and the measurement data is returned in 2 frames. The current data frame returns the data from the 1st to the 355th point, then "the order of the last detection point of the current data frame The value of "Number" is 355. If the current data frame returns data from the 356th to the 667th point, then the value of "Sequential number of the last detection point in the current data frame" is 667.

6. The total number of measurement points in the range from the starting angle to the ending angle (2Byte):

The total number of measurement points in the range from the start angle to the end angle is determined by the current "laser scanning frequency", "scanning motor speed", and "single point sampling "Number" to determine, the following will illustrate.

7. Time stamp (2Byte):

Not activated

Measurement data (Hex):

First point measurement data (4Byte)				Second point measurement data (4Byte)				 (4Byte)				Last point measurement data (4Byte)			
Measuring distance (2Byte)		Measure intensity (2Byte)		Measuring distance (2Byte)		Measure intensity (2Byte)		Measuring distance (2Byte)		Measure intensity (2Byte)		Measuring distance (2Byte)		Measure intensity (2Byte)	
L	H	L	H	L	H	L	H	L	H	L	H	L	H	L	H

The unit of measuring distance is mm, and the output is the distance data between the reflection point and the sensor. The measured intensity is the reflection of the reflected light intensity of the reflection point. The higher the value, the stronger the reflection ability of the object.

Both the measured distance and the measured intensity are low in the front and high in the back.

◆ Stop data frame (Hex)

0x52 0x41 0x75 0x74 0x6F 0x00 0x46 0x40

After the host computer sends a stop data frame to the sensor, the sensor stops returning measurement data.

◆ For examples

1. The sensor parameters are set as follows:

Ethernet mode interface: TCP server

Ethernet IP address: 192.168.1.88

Laser scanning frequency: 200KHZ

Scanning motor speed: 10HZ

Single point sampling times: 2

Sensor (server) port: 8080

2. Data sending process:

The data frame 1 is returned within the range of 0°-24°, and the distance between the 1st to the 355th point (355 points in total) and the reflection intensity data are currently returned.

Identifier	0x48		4Byte
	0x49		
	0x53		
	0x4e		
Starting angle	0x00	H(High priority)	2Byte
	0x00	L(Low behind)	
End angle	0x00	H(High priority)	2Byte
	0x18	L(Low behind)	
The total number of measurement points in the current data frame	0x01	H(High priority)	2Byte
	0x63	L(Low behind)	
The sequence number of the last detection point of the current data frame	0x01	H(High priority)	2Byte
	0x63	L(Low behind)	
The total number of measurement points from the start angle to the end angle	0x02	H(High priority)	2Byte
	0x9b	L(Low behind)	
Time stamp	0xd4	H(High priority)	2Byte
	0x5a	L(Low behind)	
Distance of the first detection point	0x xx	L(Low priority)	The detection distance of each point is expressed by 2Byte, and the reflective intensity of each point is expressed by 2Byte. The data frame returns a total of 355 points, so the total number of bytes in this part is 355*4=1420Byte
	0x xx	H(High behind)	
Reflective intensity of the first detection point	0x xx	L(Low priority)	
	0x xx	H(High behind)	
Distance of the second detection point	0x xx	L(Low priority)	
	0x xx	H(High behind)	
Reflective intensity of the second detection point	0x xx	L(Low priority)	
	0x xx	H(High behind)	
Distance of the third detection point	0x xx	L(Low priority)	
	0x xx	H(High behind)	
Reflective intensity of the third detection point	0x xx	L(Low priority)	
	0x xx	H(High behind)	
Distance of the 4th detection point	0x xx	L(Low priority)	
	0x xx	H(High behind)	
Reflective intensity of the 4th detection point	0x xx	L(Low priority)	
	0x xx	H(High behind)	
↓			
↓			
Distance of the 354th detection point	0x xx	L(Low priority)	
	0x xx	H(High behind)	
Reflective intensity of the 354th detection point	0x xx	L(Low priority)	
	0x xx	H(High behind)	
Distance of the 355th detection point	0x xx	L(Low priority)	
	0x xx	H(High behind)	
Reflective intensity of the 355th detection point	0x xx	L(Low priority)	


	0x xx	H(High behind)	
--	-------	----------------	--

The data frame 2 is returned within the range of 0°-24°, and the distance and reflection intensity data of the 356th to the 667th point (312 points in total) are currently returned. The analysis is as follows:

Identifier	0x48		4Byte
	0x49		
	0x53		
	0x4e		
Starting angle	0x00	H(High priority) L(Low behind)	2Byte
	0x00	L(Low behind)	
End angle	0x00	H(High priority) L(Low behind)	2Byte
	0x18	L(Low behind)	
The total number of measurement points in the current data frame	0x01	H(High priority) L(Low behind)	2Byte
	0x38	L(Low behind)	
The sequence number of the last detection point of the current data frame	0x02	H(High priority) L(Low behind)	2Byte
	0x9b	L(Low behind)	
The total number of measurement points from the start angle to the end angle	0x02	H(High priority) L(Low behind)	2Byte
	0x9b	L(Low behind)	
Time stamp	0xd4	H(High priority) L(Low behind)	2Byte
	0x5a	L(Low behind)	
Distance of the 356th detection point	0x xx	L(Low priority) H(High behind)	The detection distance of each point is expressed by 2Byte, and the reflective intensity of each point is expressed by 2Byte. The data frame returns a total of 312 points, so the total number of bytes in this part is 312*4=1248Byte
	0x xx	H(High behind)	
Reflective intensity of the 356th detection point	0x xx	L(Low priority) H(High behind)	
	0x xx	H(High behind)	
Distance of the 357th detection point	0x xx	L(Low priority) H(High behind)	
	0x xx	H(High behind)	
Reflective intensity of the 357th detection point	0x xx	L(Low priority) H(High behind)	
	0x xx	H(High behind)	
Distance of the 358th detection point	0x xx	L(Low priority) H(High behind)	
	0x xx	H(High behind)	
Reflective intensity of the 358th detection point	0x xx	L(Low priority) H(High behind)	
	0x xx	H(High behind)	
Distance of the 359th detection point	0x xx	L(Low priority)	

	0x xx	H(High behind)
Reflective intensity of the 359th detection point	0x xx	L(Low priority)
	0x xx	H(High behind)
↓ ↓		
Distance of the 666th detection point	0x xx	L(Low priority)
	0x xx	H(High behind)
Reflective intensity of the 666th detection point	0x xx	L(Low priority)
	0x xx	H(High behind)
Distance of the 667th detection point	0x xx	L(Low priority)
	0x xx	H(High behind)
Reflective intensity of the 667th detection point	0x xx	L(Low priority)
	0x xx	H(High behind)

6.4 CONTROL COMMANDS

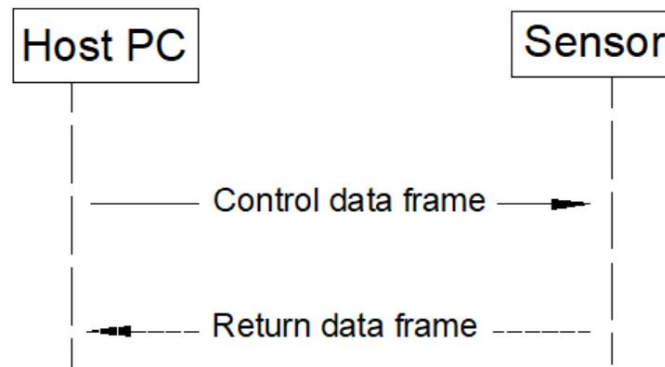

- 1) Take effect immediately after the sensor receives the data.
- 2) After the status changes, the initial status will be restored after restarting.

Control data frame (Hex)

Data frame	Data	Check bit
5Byte	5Byte	2Byte

Data frame

0x53 0x43 0x74 0x72 0x6c

Data

1Byte	2Byte	3Byte	4Byte	5Byte
Dormant	Measuring frequency	Scanning frequency	Single point sampling times	Noise filtering level

Dormant control -- In the case of low power consumption, the sensor can be put into dormant mode to reduce energy consumption.

0x00: Control the sensor to enter the dormant state.

0x01: Start the sensor operation.

Measuring frequency—The total number of times the sensor completes in 1S, generally according to the default 200k.

0x00: 50k;

0x01: 100k;

0x02: 150k;

0x03: 200k;

Scanning frequency—The sensor completes the scan times within 1S.

0x00: 10Hz;

0x01: 15Hz;

0x02: 20Hz;

0x03: 25Hz;

0x04: 30Hz;

Single point sampling times—The number of repeated measurements for a single point; the data range is 1-50 times, the more the number of measurements, the smaller the measurement fluctuation, and the angular resolution of the measurement is also increased.

Noise filtering level—Control the degree of data filtering, the higher the filtering level, the smaller the measurement fluctuation, but the greater the degree of distortion of the image corners.

0x00: Turn off filtering

0x01: Simple

0x02: Medium

0x03: Strict

Check bit

Low	High
-----	------

The data check bit adopts the CRC16 check method with modbus low bit first. The calibration value is calculated by the calibration formula, and the specific calculation method is detailed in the appendix.

C language CRC check function

cBuffer: Calculate the array of CRC check codes.

iBufLen: The length of the array.

```
unsigned int CRC_Verify(unsigned char *cBuffer, unsigned int iBufLen)
```

```
{
    unsigned int i, j;                //define wPolynom 0xA001
    unsigned int wCrc = 0xffff;
```

```

    unsigned int wPolynom = 0xA001;
    /*-----*/
    for (i = 0; i < iBufLen; i++)
    {
        wCrc ^= cBuffer[i];
    }
    for (j = 0; j < 8; j++)
    {
        if (wCrc & 0x0001)
        {
            wCrc = (wCrc >> 1) ^ wPolynom;
        }
        else
        {
            wCrc = wCrc >> 1;
        }
    }
    }
    return wCrc;
}

```

Return data frame (Hex)

Feedback current sensor status

Data frame code	Data	Check bit
5Byte	5Byte	2Byte

Data frame code

0x53 0x43 0x74 0x72 0x6c

Data

1Byte	2Byte	3Byte	4Byte	5Byte
Dormant	Measuring frequency	Scanning frequency	Single point sampling times	Noise filtering level

Dormant control -- Contrary to the control data representation.

0x01: Indicates that the sensor is currently dormant.

0x00: Indicates that the sensor is currently in operation.

Measuring frequency—Current sensor measuring frequency

0x00: 50k;

0x01: 100k;

0x02: 150k;

0x03: 200k;

Scanning frequency—The current scanning frequency of the sensor

0x00: 10Hz;

0x01: 15Hz;

0x02: 20Hz;

0x03: 25Hz;

0x04: 30Hz;

Single point sampling times—The current single-point sampling times of the sensor

Noise filtering level—Current filter level of the sensor

0x00: Turn off filtering

0x01: Simple

0x02: Medium

0x03: Strict

Check bit

Low	High
-----	------

The data check bit adopts the CRC16 check method with modbus low bit first. The check value is calculated by the check formula. For the detailed calculation method, please refer to the control data frame.

Restart data frame（Hex）

Send this data frame once, and the sensor will restart once. The interval between two transmissions is greater than 10s.



Sending a restart data sensor will respond to the data once

Restart data

Data frame header	Check bit
5Byte	2Byte

Data frame header

0x52 0x42 0x6f 0x6f 0x74

Check bit

0x94 0x7E

Return data

Data frame header	Data	Check bit
5Byte	1Byte	2Byte

Data frame header

0x52 0x42 0x6f 0x6f 0x74

Data

0x00; Restart command sent successfully

Check bit

0x7F 0xAF

7 RS485-MODBUS PROTOCOL

7.1 COMMUNICATION SPECIFICATIONS

The basic parameters of the serial port need to be set before communication. The following parameters are the basis for establishing communication.


	Parameters	Default setting
Communication way	Single master/multi-slave mode	
Operating mode	MODBUS RTU mode	RTU mode
Accept/send method	Half-duplex communication mode	
Communication ID	1-127 configurable	1/127
Communication rate	9600bps, 19200bps, 38400bps, 576000bps, 115200bps	115200bps
Data bit	8 bit	8 bit
Check bit	No parity; odd parity; even parity	No parity
Stop bit	1 bit; 2 bit	1 bit

7.2 MASTER-SLAVE COMMUNICATION TIMING

The communication mode of MODBUS protocol is single-master/multi-slave mode.



The master station sends an inquiry to one slave station. The slave performs processing and responds.

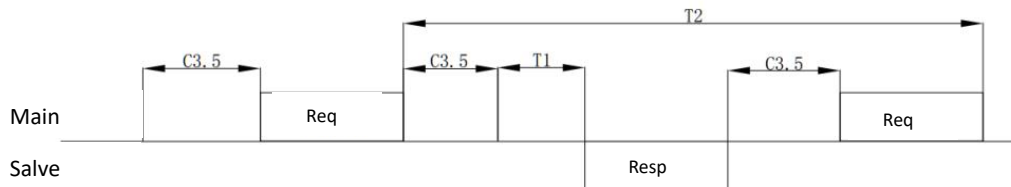


Serial number	Name	Content
C3.5	Quiet interval	As the sending waiting time, please be sure to leave an interval of 3.5 words or more. If the number of words is not full, the sensor cannot respond. When the communication speed exceeds 19200 bps, please keep the interval at least 1.75 ms.
T1	Send waiting time	After receiving the inquiry from the master station, the slave station switches the communication line to the sending state, and the time until it starts to reply to the response. In order to send a waiting time of 10 ms. The actual sending waiting time will become the static interval (C3.5) + command processing time + sending waiting time (T1)
T2	Communication	Can be configurable within 0.05s – 1s

	ion timeo ut	
--	--------------------	--

7.3 DATA STRUCTURE

Write holding register data format

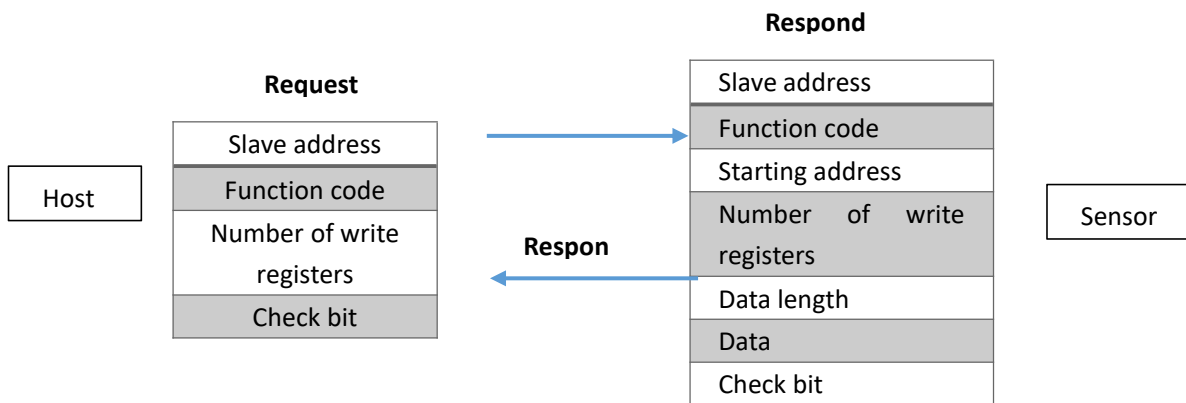

◆ Inquiry information structure

Slave address code	Function code	Starting address	Number of write registers	Data length	Data	Check bit
1Byte	1Byte	2Byte	2Byte	1Byte	(Number of write registers) *2 Byte	2Byte

● Slave address

The specified slave address, the slave sensor address set by the configuration software.

● Function code

The write function code information supported by the sensor is as follows:

Function code	Function
16	Write data to the holding register

● Starting address

The starting address of the holding register written from the sensor starts from 2000;

● Number of write registers

The number of registers that need to write data from the starting address.

● Data length

The length of the data written into the register = the number of the written register * 2 number.

● Data

The data that needs to be written from the starting address, the amount of data = the number of registers written * 2Byte.

● **Check bit**

Communication check bit

◆ **Response message structure**

After receiving the inquiry information, the slave station responds, and the response data is as follows:

Slave address code	Function code	Starting address	Number of write registers	Check bit
1 Byte	1 Byte	2 Byte	2Byte	2 Byte

● **Slave address**

The specified slave address, the slave sensor address set by the configuration software.

● **Function code**

The write function code information supported by the sensor is as follows:

Function code	Function
16	Write data to the holding register

● **Starting address**

The starting address of writing the holding register from the sensor, starting from 2000.


● **Number of write registers**

The number of registers to write data from the starting address.

● **Check bit**

Communication check bit

Read input register data format

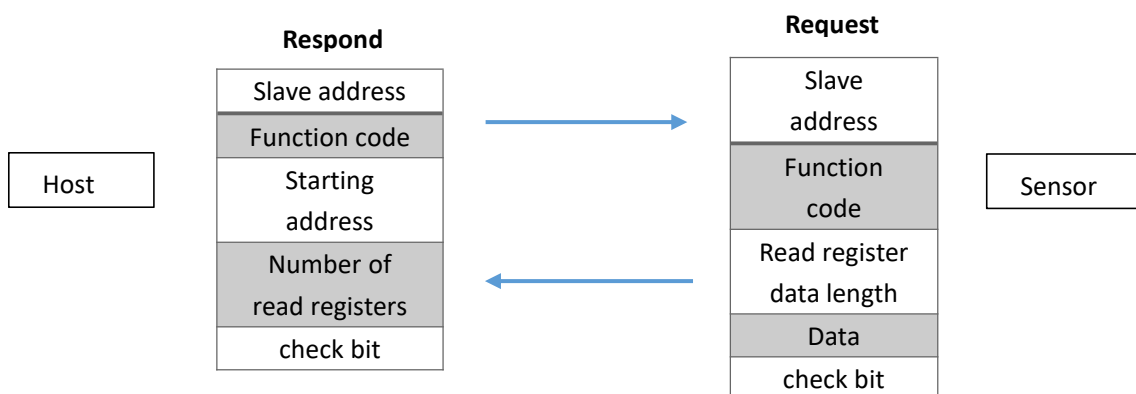

◆ **Inquiry information structure**

Slave address code	Function code	Starting address	Number of read registers	Check bit
1 Byte	1 Byte	2Byte	1Byte	2Byte

● **Slave address**

The designated slave address, the slave sensor address set after configuring the software.

● Function code

The read function code information supported by the sensor is as follows:

Function code	Function
04	Read data from input register

● Starting address

The starting address of the register read from the sensor, starting from 1000.

● Number of read registers

The number of registers read from the starting address.

● Check bit

Communication check bit

◆ Response message structure

After receiving the inquiry information, the slave station responds, and the response data is as follows:

Slave address code	Function code	Read register data length	Data	Check bit
1 Byte	1 Byte	1 Byte	(Number of read registers) * 2 Byte	2 Byte

● Slave address

The designated slave address, the slave sensor address set by the configuration software.

● Function code

The read function code information supported by the sensor is as follows:

Function code	Function
04H	Read data from input register

● Read register data length

The length of the register data that the host computer needs to read.

● Data

The data of the register that the host computer needs to read. Since one register is 2 Bytes, the data length of this section is the number of read registers * 2 Byte.

● Check bit

Communication check bit

7.4 REGISTER DEFINITION

Write to holding register function (function code 16)

Register address	Write value	Content
2000	00 - 01	Sensor working mode 00: Channel selection mode 01: intelligent channel selection mode
2001	00 - 63	Control the sensor channel value in channel specified mode 1-63
2002	-180-180	Switching angle value in intelligent channel selection mode
2003	-300-300	Switching speed value in intelligent channel selection mode
2004	00 - 04	Channel group number in intelligent channel selection mode 0-4

Read input register function (function code 04)

Register address	Read value	Content
1000	00 - 63	Sensor current channel value
1001	00 – 01	Sensor Out2 output status Related to the sensor output logic of the parameter setting item: Normally closed mode (default) 00: Object detected 01: No object detected Normally open 01: Object detected 00: No object detected
1002	00 – 01	Sensor Out1 output status Related to the sensor output logic of the parameter setting item: Normally closed mode (default) 00: Object detected 01: No object detected Normally open 01: Object detected 00: No object detected
1003	00 – 01	Sensor Out3 output status Related to the sensor output logic of the parameter setting item: Normally closed mode (default) 00: Object detected 01: No object detected Normally open 01: Object detected 00: No object detected
1004	0-7	Display the current state of the sensor, the value range is 00-07; 00: Normal state of the sensor 01-07: Sensor failure status

7.5 SERIAL PORT TO SEND DATA

Sensor setting parameters


Sensor Setting

↑ ↓

Control Mode	IO Interface
RS485 ID(1-127)	127
RS485 BaudRate	9600
RS485 Verify	None
RS485 StopBit	Stop 1Bit
CAN ID(1-127)	127
CAN BaudRate	125K
Output Logic	Active High
Laser Scan Freq	50KHz
Scan Motor Speed	10Hz(600r/min)
Scan Filter Number	3
Angle Result	0.216000
Scan Filter Level	Close
Power On Enable	Run
Sleep Function	Close
Sleep Time	60
Ether Mode	TCP Server
Ether IP Address	
192	168
1	88

1) Configure according to the left picture;


Connect

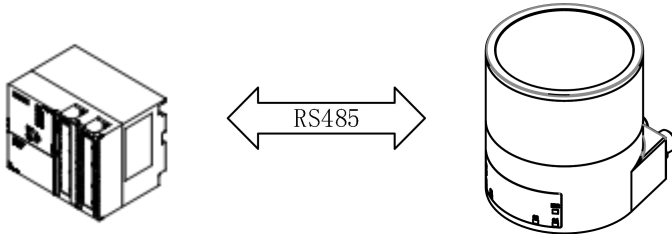

Host computer: client data sending equipment, which can be single-chip microcomputer, PLC, industrial computer, etc.

Sensor: Model LE50621

Send data timing

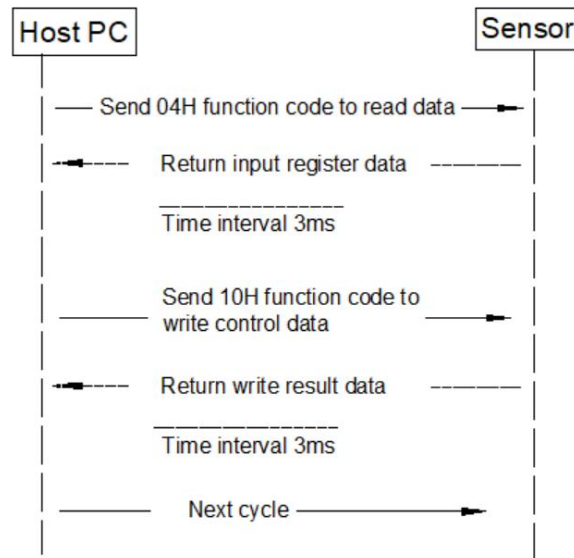

Send 04H function code to read data frame

The upper computer reads the sensor input register parameters, the following is the analysis of the hexadecimal data sent in a single time.

0x01	0x04	0x03 0xE8(1000)	0x00 0x05	0xB0 0x79
Sensor RS485 address code	Read input register function code	Need to read the start address of the input register	Need to read the number of registers	Check bit
1Byte	1Byte	2Byte	2Byte	2Byte

Returns the input register data frame

0x01	0x04	0x0A	0x00 0x00 0x00 0x01 0x00 0x01 0x00 0x00 0x00 0x00		0xFC 0x7D
Sensor RS485 address code	Read input register function code	Return register data length	Data		Check bit
1Byte	1Byte	1Byte	10Byte		2Byte

Data

0x00 0x00	0x00 0x01	0x00 0x01	0x00 0x00	0x00 0x00
1000 address data	1001 address data	1002 address data	1003 address data	1004 address data
The sensor is currently channel 0	Sensor Out2 output status: No object detected	Sensor Out1 output status: No object detected	Sensor Out3 output status: Object detected	Display the current state of the sensor Normal status

Send 10H function code to write control data frame

The upper computer writes the sensor holding register parameters, the following is the analysis of the hexadecimal data sent in a single time.

0x01	0x10	0x07 0xD0(2000)	0x00 0x05	0x0A	See the table below	0x97 0xEA
Sensor RS485 address code	Read input register function code	Need to write the starting address of the holding register	Need to write the number of registers	Write register data length	Data	Check bit
1Byte	1Byte	2Byte	2Byte	1Byte	10Byte	2Byte

Data

0x00 0x00	0x00 0x00	0x00 0x00	0x00 0x00	0x00 0x00
2000 address data	2001 address data	2002 address data	2003 address data	2004 address data
The sensor currently specifies the mode for the channel	The sensor is switched to channel 0	In channel designation mode: Invalid	In channel designation mode: Invalid	In channel designation mode: Invalid

Return data frame of writing result

0x01	0x10	0x07 0xD0(2000)	0x00 0x87
Sensor RS485 address code	Write to holding register	Write the start address of the holding register	Check bit

		function code			
	1Byte	1Byte	1Byte	2Byte	

8 CAN OPEN DATA PROTOCOL

In the Can open mode, only the switch signal of the detected obstacle can be output, and the Ethernet mode can only output the sensor measurement data.

8.1 BASIC CONCEPTS

Electronic Data File (EDS) : A directory used to record and describe all the parameters of a CANopen node; all CAN open parameters such as the type, manufacturer, serial number, version information, baud rate, etc. of the node can be obtained through the EDS file. When using the CAN OPEN function in PLCs, etc., you need to import the EDS file first, and configure it through the object dictionary recorded in the EDS.

Service Data Object (SDO) : SDO is mainly used for the parameter configuration of the CAN OPEN master station to the slave station node. After each SDO message is sent, there will be a response message to ensure that the message is delivered accurately. In a CAN OPEN communication system, there is usually only one master station as the client, and the slave node as the SDO server responds to the SDO message. The client of the master station accesses and modifies the corresponding index parameter in the EDS of any node through the SOD message.

Process Data Object(PDO): PDO is used to transmit real-time data, one-way transmission, without receiving the response from the slave node, a PDO message can transmit up to 8 bytes of data, which is mainly used to transmit real-time data. The master node and the slave node predefine the sending data and receiving data corresponding to the PDO, so there is no need to reconfirm during the transmission process, and there is no response time and response data, thereby improving the bus utilization.

8.2 COMMUNICATION SPECIFICATIONS

Communication way	Bus mode
Communication rate	1000k(default), 500k, 250k, 125k
Communication address	1-127(default)
TPDO	4
RPDO	4
Online message	Support
Heartbeat message	Support
Heartbeat consumption	Support
SDO	Support

8.3 CONTROL MESSAGE

The sensor node supports the control message (NMT Module Control message) sent by the master station, and the control message information does not respond.

Message format

COB-ID	DLC	Byte 0	Byte 1
0x 000	1	CS control function code	Node-ID

CS: control function code

Command code	NMT service	Effect
0x01	Enter operating state	Node starts PDO sending and receiving status
0x02	Enter the stop state	The node enters the stopped state
0x80	Enter pre-operational state	The node enters the pre-operational state, which is used to configure PDO mapping and parameter setting
0x81	Reset node	Reset the application layer of the node, and the communication parameters are restored to the initial state values
0x82	Reset communication	Reset the node communication, reinitialize the communication when the communication is disturbed, the node bus is wrong, and the bus is closed

Node-ID: node address, when Node-ID=0, all nodes are controlled.

8.4 NODE ONLINE MESSAGE

After the sensor node is powered on and initialized, it sends a frame of online message.

Message format

The frame ID of the node online message is 0x700+Node-ID, the data length is 1, and the data is 00.

COB-ID	DLC	Byte 0
0x 700+Node-ID	1	00

8.5 HEARTBEAT MESSAGE

Sensor nodes support heartbeat message sending, configure the heartbeat time according to index 0x1017, and send heartbeat messages.

Index	Subindex	Data type	Defaults	Describe
0x1017	None	Uns 16	0x00	Configure the sending period of heartbeat messages, Unit ms;

Message format


COB-ID	DLC	Byte 0
0x 700+Node-ID	1	Status code

The frame ID of the node online message is 0x700+Node-ID, the data length is 1, and the data represents the current node status.

Status code:

Status code	Status
0x05	Enter operating state
0x04	Enter the stop state
0x7F	Enter pre-operational state

8.6 PROCESS DATA OBJECT (PDO)

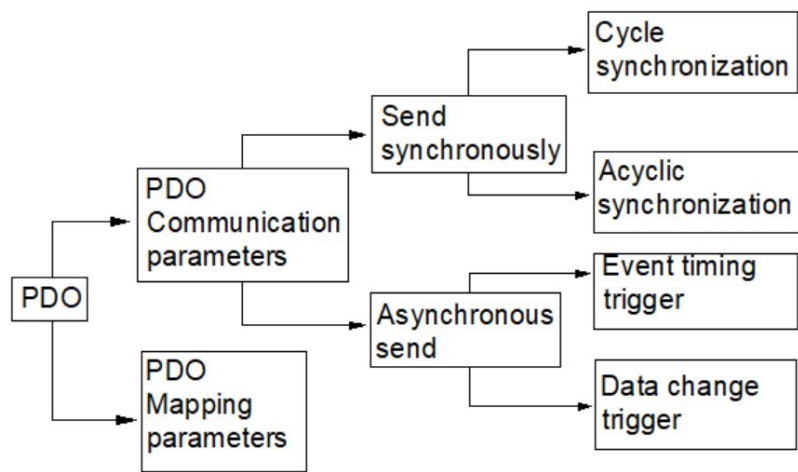

PDO transmission/reception is observed by the (slave) CAN node.
 The sensor node defines 1 TPDO and 1 RPDO.

PDO message format

COB-ID	DLC	Data
	1-8	1-8Byte

COB-ID

Object	COB-ID
TPDO1 (send)	0x180+Node ID
RPDO1 (receive)	0x200+Node ID

Data (1-8Byte): The length is determined by the mapping data in the mapping parameters.

PDO communication parameters

Index	Subindex	Data type	Default	Describe
RPDO 0x1400 TPDO 0x1800	0x00	Uns 8	0x08	Number of parameter entries
	0x01	Uns 32	0x 00	COB-ID
	0x02	Uns 8	0x 00	Synchronization type
	0x03	Uns 16	0x 00	Production prohibition time (unit: 100us)
	0x05	Uns 16	0x 00	Event timer trigger time (unit: ms)

Number of parameter entries: This citation contains the number of sub citations.

COB-ID: Receive and send the frame ID of the current PDO.

Synchronization type:

Synchronization type	Trigger conditions (B=satisfy two conditions, O=satisfy one condition)			PDO transmission
	SYNC (Sync message received)	RTR (Remote Frame Received)	Event (data change or timer)	

00	B	-	B	Acyclic synchronization
01-240	O	-	-	Cycle, synchronization, (1-240 values represent the number of SYNC messages received between two PDO messages)
241-251	-	-	-	Reserve
252	B	B	-	Sync, after RTR
253	-	O	-	Asynchronous, after RTR
254	-	O	O	Asynchronous, manufacturer specific event
255	-	O	O	Asynchronous, device sub-protocol specific event

Production prohibition time: The minimum interval between two PDO transmissions to avoid excessive PDO transmissions, resulting in increased bus load.

Event timer trigger time: PDO timing sending cycle time.

PDO mapping parameters

Set the data in the corresponding index that the current PDO needs to transmit, and complete the custom transmission of data by setting the PDO to map to the corresponding index. The length of a PDO is a maximum of 8 Bytes, and the length of the mapped data cannot exceed 8 Bytes. The sensor has a default mapping, and the mapping can be changed according to requirements.

RPDO default mapping

Only RPDO1 is used in the default mapping

Index	Subindex	Data type	Default	Describe
RPDO1 0x1600	0x00	Uns 8	8	Number of parameter entries
	0x01	Uns 32	0x20000008	8-bit length data mapped to index 0x2000 and sub-index 0x00
	0x02	Uns 32	0x20010008	8-bit length data mapped to index 0x2001 and sub-index 0x00
	0x03	Uns 32	0x20020008	8-bit length data mapped to index 0x2002 and sub-index 0x00
	0x04	Uns 32	0x20030010	16-bit length data mapped to index 0x2003 and sub-index 0x00
	0x05	Uns 32	0x20040010	16-bit length data mapped to index 0x2004 and sub-index 0x00;
	0x06-0x08	Uns 32	0x00	Unmapped

TPDO default mapping

Index	Subindex	Data type	Default	Describe
TPDO1 0x1A00	0x00	Uns 8	8	Number of parameter entries
	0x01	Uns 32	0x20050008	8-bit length data mapped to index 0x2005 and sub-index 0x00
	0x02	Uns 32	0x20060008	8-bit length data mapped to index 0x2006 and sub-index

				0x00;
	0x03	Uns 32	0x20070008	16-bit length data mapped to index 0x2007 and sub-index 0x00
	0x04	Uns 32	0x20080008	16-bit length data mapped to index 0x2008 and sub-index 0x00;
	0x05	Uns 32	0x20090008	16-bit length data mapped to index 0x2009 and sub-index 0x00
	0x06-0x08	Uns 32	0x00	unmapped

8.7 SERVICE DATA OBJECT (SDO)

Send message format

COB-ID	DLC	LBS							MBS
0x600+Node-ID	8	Control function code	Object index	Object sub-index		Up to 4 bytes			

Control function code

Command code	Describe
0x40	Command word when sending message
0x2F	Indicates that the sent data is 1 byte
0x2B	Indicates that the sent data is 2 byte
0x23	Indicates that the sent data is 4 byte

Node response message format

COB-ID	DLC	LBS							MBS
0x580+Node-ID	8	Receive command code	Object index	Object sub-index	Up to 4 bytes				

Control function code

Command code	Describe
0x60	SDO message sent successfully
0x80	SDO message error
0x4F	Indicates that the received data is 1 byte
0x4B	Indicates that the received data is 2 byte
0x43	Indicates that the received data is 4 byte

8.8 EDS FILE

For EDS files, please visit www.hinson-xs.com.

8.9 INDEX DEFINITION

Index (Hex)	Sub Index (Hex)	parameter name	Type	Attribute s	Write value (D): function
-------------	-----------------	----------------	------	-------------	---------------------------

0x2000	0x00	Mode selection	UNS 8	Read/Write	00: Channel selection mode 01: Channel intelligent selection mode
0x2001	0x00	Channel value	UNS 8	Read/Write	In channel designated mode: the value range is 00-63, and the control sensor is switched to the designated channel
0x2002	0x00	Channel group value	UNS 8	Read/Write	In the channel intelligent selection mode: the value range is 00-04, and the sensor is controlled to switch to the specified channel group
0x2003	0x00	Vehicle speed value	IN 16	Read/Write	In the channel intelligent selection mode: the speed condition value of the channel switching
0x2004	0x00	Vehicle angle value	IN 16	Read/Write	Channel intelligent selection mode: angle condition value for channel switching
0x2005	0x00	OUT2 status	UNS 8	Read only	Sensor Out2 output status Related to the sensor output logic of the parameter setting item: Normally closed mode (default) 00: Object detected 01: No object detected Normally open 01: Object detected 00: No object detected
0x2006	0x00	OUT1 status	UNS 8	Read only	Sensor Out1 output status Related to the sensor output logic of the parameter setting item: Normally closed mode (default) 00: Object detected 01: No object detected Normally open 01: Object detected 00: No object detected
0x2007	0x00	OUT3 status	UNS 8	Read only	Sensor Out3 output status Related to the sensor output logic of the parameter setting item: Normally closed mode (default) 00: Object detected 01: No object detected Normally open 01: Object detected 00: No object detected
0x2008	0x00	Sensor current channel	UNS 8	Read only	The current channel value of the sensor
0x2009	0x00	Sensor failure status	UNS 8	Read only	The current status of EOUT; 00: Normal Not 00: Error status

8.10 SEND DATA DIRECTLY

Sensor setting parameters

Sensor Setting

Control Mode

CanOpen Interface

RS485 ID(1-127)

12

RS485 BaudRate

115200

RS485 Verify

None

RS485 StopBit

Stop 1Bit

CAN ID(1-127)

127

CAN BaudRate


1000K

Output Logic


Active High

1)Configure according to the left picture

Connect

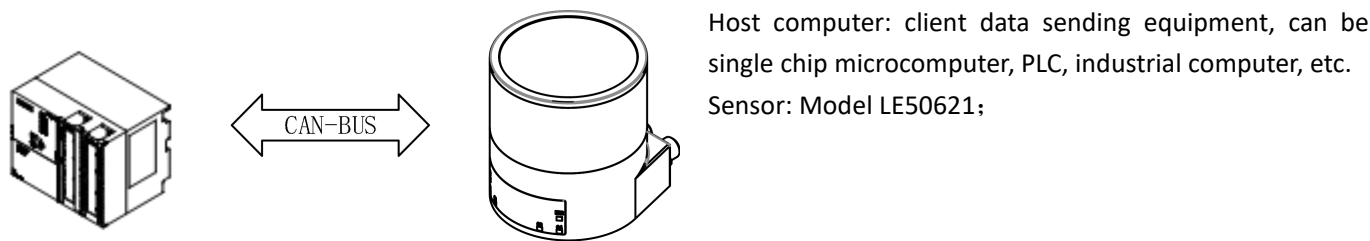

Send data timing

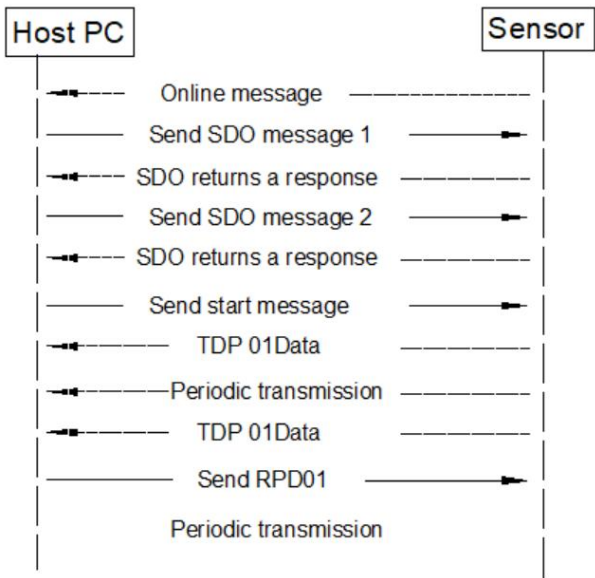

Online message

After the sensor is powered on, it sends a frame of online message.

COB-ID	DLC	Byte 0
0x 77F	1	00

Send SDO message 1

COB-ID	DL C	LBS							MBS
0x67F	8	0x 2F	0x 00	0x 18	0x 02	0x FF	0x 00	0x 00	0x 00

SDO return message

COB-ID	DL C	LBS							MBS
0x5FF	8	0x 60	0x 00	0x 18	0x 02	0x 00	0x 00	0x 00	0x 00

Send SDO message 2

COB-ID	DL C	LBS							MBS
0x67F	8	0x 2F	0x 00	0x 18	0x 05	0x 0A	0x 00	0x 00	0x 00

SDO return message

COB-ID	DL C	LBS							MBS
0x5FF	8	0x 60	0x 00	0x 18	0x 05	0x 00	0x 00	0x 00	0x 00

Send start message

COB-ID	DL C	LBS	MBS
0x00 0	2	0x 01	0x 7F

Send RPDO1 message

COB-ID	DL C	LBS							MBS
0x27F	8	0x 00	0x 05	0x 00	0x 00	0x 00	0x 00	0x 00	0x 00

9 AFTER-SALE INFORMATION

9.1 WARRANTY PERIOD

LE-50621 provides a limited time warranty. During the warranty period, if the product cannot be used normally due to quality problems, design defects, etc., we will carry out after-sales maintenance for free.

- Warranty period: 2 years from sale.

9.2 WARRANTY SCOPE

If the product is within the scope of the warranty during the warranty period, we will repair or replace it free of charge.

- The product warranty and after-sales service are limited to mainland China.
- The product cannot be used normally when it is out of the box due to transportation.
- Failure to work normally caused by damage to the product's own components.
- Product design defects can not be used normally.

9.3 EXEMPTION SCOPE

Please pay attention to the following conditions during the use of the product, we will not provide free after-sales and warranty.

- Failure to install the product according to the instructions correctly, causing damage to the product.
- Use this product under unsuitable environments and conditions, causing product damage.
- Damage to the product due to non-compliance with the product manual.
- Disassemble or repair the product without the permission of the company.
- Product damage caused by irresistible external forces such as natural disasters and fires.

9.4 TECHNICAL SUPPORT

If a fault occurs that cannot be rectified, please contact us as follows.

- Tel: +86-757-22218956
- Email: lixianjiao@hinson-xs.com
- Company website: www.hinson-xs.com
- Manufacturer: Guangdong Hinson Technology Co., Ltd.
- WhatsApp: +8618670078135