

Internal drive

FR-40-80



Connection and
commissioning

Housing height 40 mm

Housing width 80 mm

Belt width 65 mm


Centre distance In mm (available at short notice):
350, 400, 450, 500, 600, 700, 800, 900, 1,000,
1,200, 1,400, 1,600
Custom centre distances on request

Conveyor speeds / load 2–10 m/min at max. 50 N or
0.5–3 m/min at max. 100 N

Speed adjustable via analogue signal 0–10 V:
GND or 0–0.3 V Programmed, fixed value
0.5–0.9 V Motor stop
1–10 V Speed adjustable from min.
up to max.
Up to 11 V Speed increase up to 110 %
of rated speed with Vetter
setpoint device

Conveyor belts Green, FDA, antistatic (others available on request)

Supply voltage 24 V DC

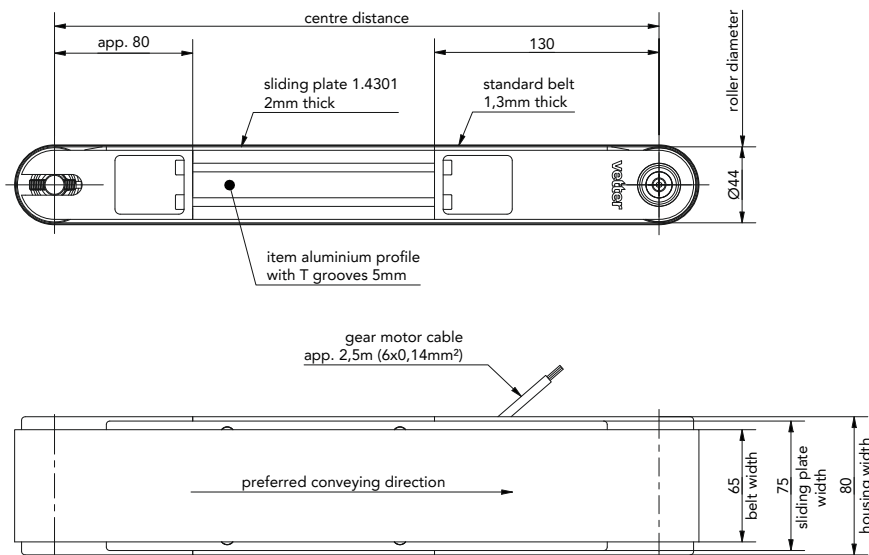

Extensions

