



# **EasyLoop**

Vehicle detection sensor

Smart Sensing Solutions



# Your benefits

The EasyLoop is a cutting-edge vehicle detection sensor designed to manage entrance and exit operations across parking lots, business parks, and more. Powered by 79 GHz millimeter-wave radar technology and a compact design, it ensures reliable and precise detection, even in the harshest conditions.

#### **User friendly installation**

Configure sensitivity, detection range and operation modes directly via mobile app.

Smart Installation: Above-ground setup at 0.8m.

No digging or surfacing work required with bracket options for diverse applications.

#### Robust design

Stable, accurate detection in all conditions whether its rain, fog, snow or dust. Superior design offers protection ratings of IP66 (high dust/water protection). Built to withstand rugged use while maintaining a slim form factor.

#### **Several features**


The sensor intelligently learns its surroundings and focuses only on the relevant detection zone to avoid false alarms. Works for activation or presence detection, vehicle protection and offers accurate object differentiation to filter out pedestrian traffic, due to high resolution 79 GHz radar. Vehicle counting supports analytics and control for advanced traffic management.



EasyLoop D Article No. 487132

# **Areas of application**

We use our extensive technological expertise to develop individual customer solutions. With intelligent presence detection sensor technology for sliding gates and parking management, BBC Bircher Smart Access provides reliable, application-specific products.

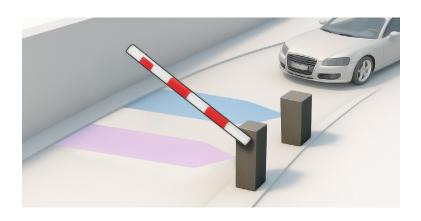

#### **Barrier-parking & toll-system**

Efficiently activate ticket dispensers in parking areas or payment terminals at toll stations or safeguard barriers with presence detection. EasyLoop activates upon vehicle arrival and seamlessly integrates with existing systems ensuring smooth and efficient access flow.



#### Sliding gates

The EasyLoop products feature cutting edge radar technology to activate or safeguard sliding gates with pedestrian & vehicle differentiation and detection.

# EasyLoop D

## Datasheet

#### **Function**

Vehicle detection sensor for safeguarding (presence detection) or activating (motion detection) barrier systems

#### Mechanical data

Housing material	PC, PBT, GF20, ABS
Housing colors	black
Dimensions (L × W × D)	108 × 74 × 17 mm
Weight	131 g

#### **Technological data**

Technology	Microwave
Transmission frequency	79 GHz
Detection distance	1.0 – 6.0 m, default 3 m configurable via mobile app
Detection width	0.5 – 1.5 m per side, configurable via mobile app
Interface	Bluetooth® / RS485

#### Electrical data

Elooti loai data	
Supply voltage	9-24VDC (12 V / 1 A preferred)
Power consumption	<2.5W
Output	NO/NC dual relay
Response time	100ms
Wiring	10 pin
Connection type	1.2 m cable with plug connector

#### **Surrounding conditions**

-40 °C, max. 85 °C

#### Conformity

Certification	RoHS 2011/65/EU
	RED 2014/53/EU

## Order Details

Article Nr.	Description
487132	EasyLoop D vehicle detection
	microwave motion sensor
	function: activation or presence detection

## Compatible accessories

Article Nr.	Description
487135	Mounting Bracket EasyLoop



## Technical Documentation



You will find all documents on the manufacturer website bircher.com

If you have any questions about the device, please contact us:



service@bircher.com 📞 +41 52 687 13 66





#### EasyLoop

Configuration of the vehicle detection sensor









